

STANDARD RATINGS


Vrms	700			600			500		400
MFD at 1KHz	0.25	0.33	0.66	1.00	1.20	1.32	2.40	2.60	5.00
Current Irms	500	500	500	650	650	650	650	650	800
Power Kvar	300	300	300	300	300	300	300	300	300
Frequency KHz	390-530	295-401	147-200	132-223	111-187	100-170	80-97	72-85	59-67
Terminal Style	M8	M8	M8	M8	M8	M8	M8	M8	M8




KEY FEATURES

- Maximum Frequency 700 KHz
- Operating Temperature range -25°C to +85°C
- Low ESL & ESR
- Low loss Polypropylene dielectric
- Water flow rate 10 LPM
- Cooling: Conduction Cooled

DIMENSIONS (mm)

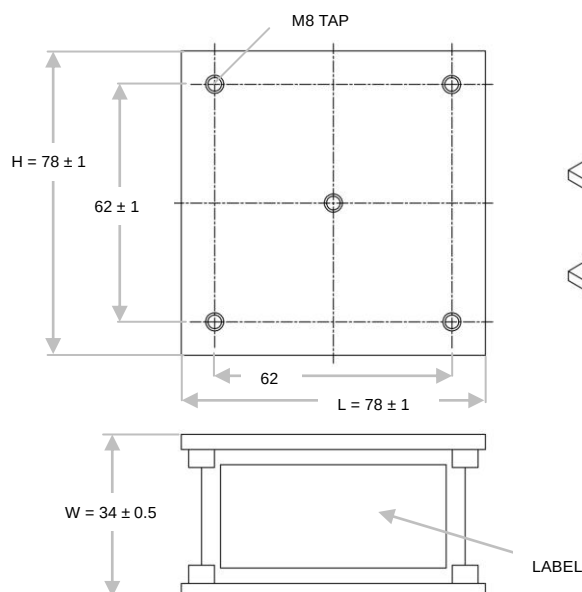

Terminal M8



Torque 20 Nm max.