


	STANDARD RATINGS						
Vrms	700				600	500	400
MFD at 1KHz	0.18	0.24	0.33	0.66	1.20	2.40	5.00
Current Irms	350	400	350	450	500	500	400
Power Kvar	180	180	180	180	180	180	180
Frequency KHz	324-601	243-549	176-279	88-270	65-183	47-91	35-63
Terminal Style	L	L	L	L	L	L	L



KEY FEATURES

- Maximum Frequency 650 KHz
- Operating Temperature range -25°C to +85°C
- Low ESL & ESR
- Low loss Polypropylene dielectric
- Water flow rate 10 LPM
- Cooling: Conduction Cooled

DIMENSIONS (mm)

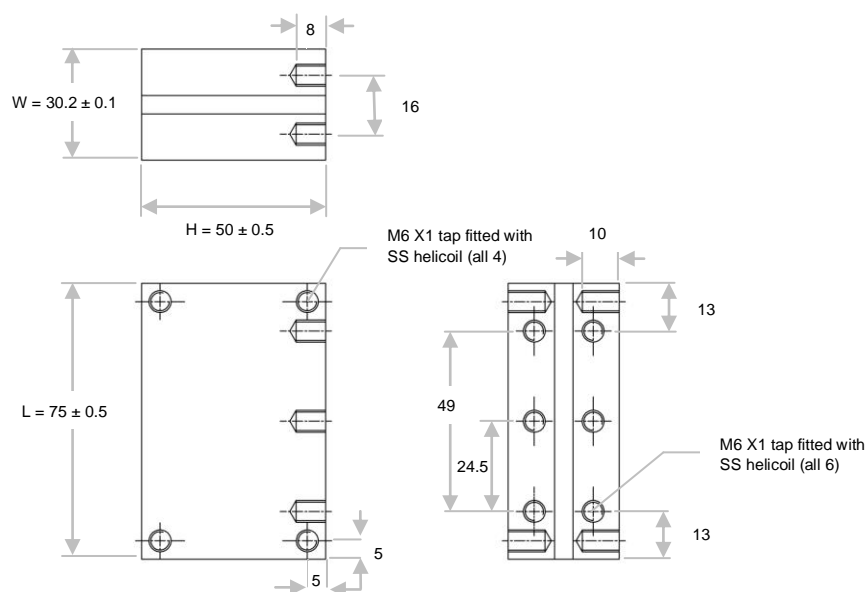

Terminal L

Torque 15 Nm max.