

STANDARD RATINGS

Vrms	1100	1000		900		800	700	600	500
MFD at 1KHz	0.025	0.050	0.085	0.100	0.170	0.250	0.330	0.660	1.200
Current Irms	200	200	200	250	250	270	300	350	400
Power Kvar	200	200	200	200	200	200	200	200	200
Frequency KHz	948-1414	574-706	374	394-501	232-294	199-231	197-217	134-148	106
Terminal Style	C	C	C	C	C	C	C	C	C




KEY FEATURES

- Maximum Frequency 1400 KHz
- Operating Temperature range -25°C to +85°C
- Low ESL & ESR
- Low loss Polypropylene dielectric
- Water flow rate 10 LPM
- Cooling: Conduction Cooled

DIMENSIONS (mm)

Terminal C

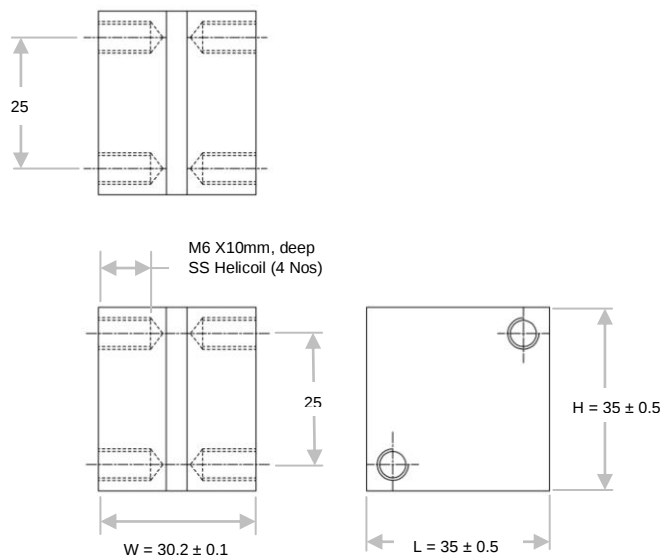

Torque 15 Nm max.