


STANDARD RATINGS										
Vrms	1000		900	800			700	600		450
MFD at 1KHz	0.05	0.10	0.17	0.25	0.33	0.50	0.66	1.20	1.33	2.40
Current Irms	250	250	300	300	300	350	400	450	450	500
Power Kvar	200	200	200	200	200	200	200	200	200	200
Frequency KHz	636-994	318-498	232-422	199-286	150-216	98-194	98-193	74-134	65-120	65-85
Terminal Style	P	P	P	P	P	P	P	P	P	P

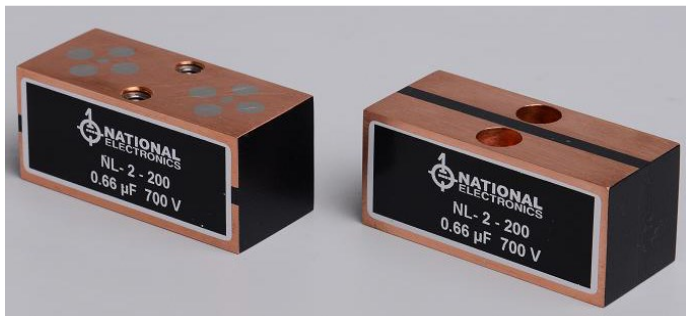

KEY FEATURES

- Maximum Frequency 1000 KHz
- Operating Temperature range -25°C to $+85^{\circ}\text{C}$
- Low ESL & ESR
- Low loss Polypropylene dielectric
- Water flow rate 10 LPM
- Cooling: Conduction Cooled

DIMENSIONS (mm)

