



# WMA500D

## 499 MHz 1.5-Ohm INPUT IMPEDANCE LOW NOISE PRE-AMPLIFIER

REV A  
March 2021

### Key Features

- Frequency of 499 MHz
- 1.5 Ohm Input Impedance
- 0.45 dB Noise Figure
- 35.0 dBm Max  $P_{IN}$
- 22.0 dBm Output  $IP_3$
- 28.0 dB Gain
- 10.0 dBm  $P_{1dB}$
- 1.22:1 Output VSWR
- Unconditional Stable,  $k > 1$
- Single Power Supply
- None Magnetic

### Product Description

WMA500D integrates WanTcom proprietary low noise amplifier technologies, high frequency micro electronic assembly techniques, and high reliability designs to realize optimum low noise figure, wideband, and high performances together. With single +10.0V DC operation, the amplifier has 1.5 Ohm input impedance and unconditional stable condition. The amplifier has 0.60" x 0.40" x 0.10" surface mount package.

### Applications

- Magnetic Resonance Imaging
- RF Measurement
- Medical
- Current Sensor



Other frequencies and impedance available!

### Specifications

# Preliminary

Summary of the key electrical specifications at room temperature, tested in the WanTcom fixture, 80051.


Index	Testing Item	Symbol	Test Constraints	Min	Nom	Max	Unit
1	Gain	$S_{21}$	499 MHz	27.5	28.0	28.5	dB
2	Gain Variation	$\Delta G$	499 +/- 1 MHz		+/-0.03	+/- 0.05	dB
3	Input Impedance	RE [ $Z_{in}$ ]	499 MHz	1.2	1.5	2.0	Ohm
		IM [ $Z_{in}$ ]	499 MHz	-2.0	0	2.0	Ohm
4	Output VSWR, 50 Ohm Impedance	$SWR_2$	499 MHz			1.22:1	Ratio
5	Reverse Isolation	$S_{12}$	499 MHz	60	70		dB
6	Noise Figure	NF	499 MHz		0.40	0.50	dB
7	Output Power 1dB Compression Point	$P_{1dB}$	499 MHz	7	10		dBm
8	Output-Third-Order Interception point	$IP_3$	Two-Tone, $P_{out} = 0$ dBm each, 1 MHz separation	18	22		dBm
9	Current Consumption	$I_{dd}$	$V_{dd} = +10.0$ V		15		mA
10	Power Supply Operating Voltage	$V_{dd}$		+7	+10	+11	V
11	Thermal Resistance	$R_{th,c}$	Junction to case			220	$^{\circ}C/W$
12	Operating Temperature	$T_o$		+10		+60	$^{\circ}C$
13	Maximum RF Input Power	$P_{IN, MAX}$	DC – 6.0 GHz, 10% Duty Cycle,			35	dBm
14	Saturate Recover Time	$t_{sr}$	10% to 90% from 20 dBm Pin		8	10	$\mu S$
15	ESD Protection, None Contact	$V_{ESDN}$	Output Ports			16	kV
16	ESD Protection, Direct Contact	$V_{ESD}$	Output Ports			6	kV

### Absolute Maximum Ratings

Parameters	Units	Ratings
DC Power Supply Voltage	V	12.0
Drain Current	mA	30
Total Power Dissipation	mW	350
RF Input Power, 10% Duty Cycle	dBm	35
Channel Temperature	$^{\circ}C$	150
Storage Temperature	$^{\circ}C$	-65 ~ 150
Operating Temperature	$^{\circ}C$	0 ~ +70
Thermal Resistance <sup>1</sup>	$^{\circ}C/W$	215

Operation of this device beyond any one of these parameters may cause permanent damage.

### Functional Block Diagram

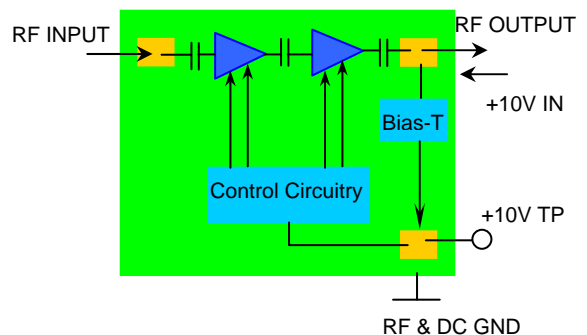

<sup>1</sup> The last stage transistor dominates the heat dissipation. The drain bias voltage is +6V and the drain current is 15.0 mA. The total power dissipation of the last stage transistor is thus 90 mW. The junction temperature arise  $0.09 \times 215 = 19 (^{\circ}C)$ .

Specifications and information are subject to change without notice.



# WMA500D

## 499 MHz 1.5-Ohm INPUT IMPEDANCE LOW NOISE PRE-AMPLIFIER

REV A  
March 2021

### Ordering Information

Model Number	WMA500D
--------------	---------


Waffle shell is used for the packing. Contact factory for tape and reel packing option for higher volume order.

### Typical Data

### Outline,

PIN	1	2	3	4	CNTR
FCTN	IN	NC/10V	OUT/10V	GND	GND


UNITS: INCH  
[mm]  
FINISH: WHITE TIN

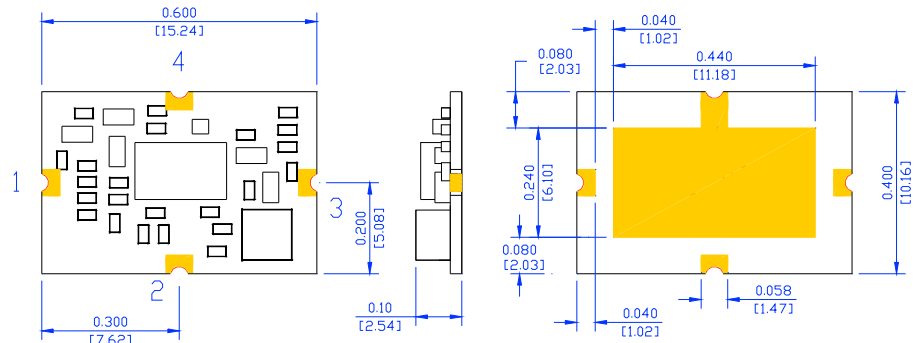

### Foot Print/Mounting Layout

PIN	1	2	3	4	CNTR
FCTN	IN	NC/10V	OUT/10V	GND	GND

UNITS: INCH  
[mm]  
FINISH: WHITE TIN

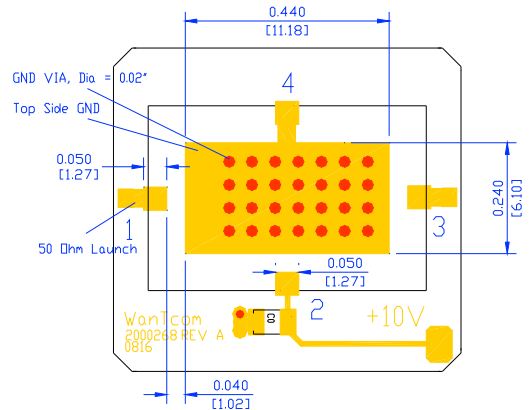

Specifications and information are subject to change without notice.



### Application Notes:

#### A. Motherboard Layout

The recommended motherboard layout is shown in diagram of [Foot Print/Mounting Layout](#). Sufficient numbers of ground vias on center ground pad are essential for the RF grounding. The width of the 50-Ohm microstrip lines at the input and output RF ports may be different for different property of the substrate. The ground plane on the backside of the substrate is needed to connect the center ground pad through the vias. The ground plane is also essential for the 50-Ohm microstrip line launches at the input and output ports.

The +10V DC voltage is applied at Pin 2 or at the output Pin 3. There is a built-in bias-T at the output port to separate the RF output signal and input +10V DC power supply.

No DC block capacitor is required at input RF ports.

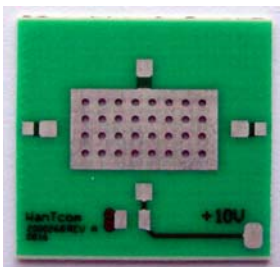


Fig. 1 Example of the motherboard

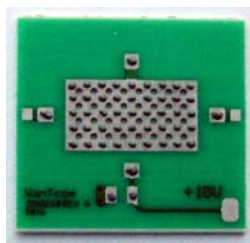


Fig. 2 Dispensed solder paste

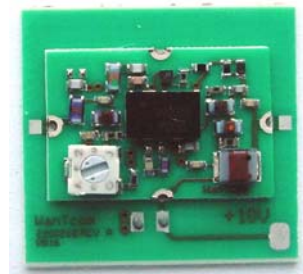


Fig. 3 Assembled part

#### B. Assembly

The regular low temperature and none clean solder paste such as SN63 is recommended. The high temperature solder has been used internally for the WHM series amplifier assembly. The melting temperature point of the high temperature solder is around 217 ~ 220 °C. Thus, melting temperature of the solder paste should be below 217 °C for assembling WHM series amplifier on the test board to reduce the possible damage. The temperature melting point of the SN63 solder paste is around 183 °C and is suitable for the assembly purpose.

The SN63 solder paste can be dispensed by a needle manually or driven by a compressed air. **Figure 2** shows the example of the dispensed solder paste pattern. Each solder paste dot is in the diameter of 0.005" ~ 0.010" (0.125 ~ 0.250 mm).

For volume assembly, a stencil with 0.006" (0.15 mm) is recommended to print the solder paste on the circuit board.

For more detail assembly process, refer to AN-109 at [www.wantcominc.com](http://www.wantcominc.com) website.

\*\*\*\*\*