

## STANDARD RATINGS

Vrms	STANDARD RATINGS						
	1000		800	700		600	500
MFD at 1KHz	0.10	0.17	0.33	0.50	0.66	1.32	2.40
Current Irms	400	400	500	650	650	800	800
Power Kvar	400	400	400	400	400	400	400
Frequency KHz	637	375	302	260-336	197-255	133-192	106
Terminal Style	P	P	P	P	P	P	P




## KEY FEATURES

- Maximum Frequency 1000 KHz
- Operating Temperature range -25°C to +85°C
- Low ESL & ESR
- Low loss Polypropylene dielectric
- Water flow rate 10 LPM
- Cooling: Conduction Cooled

## DIMENSIONS (mm)

Terminal P

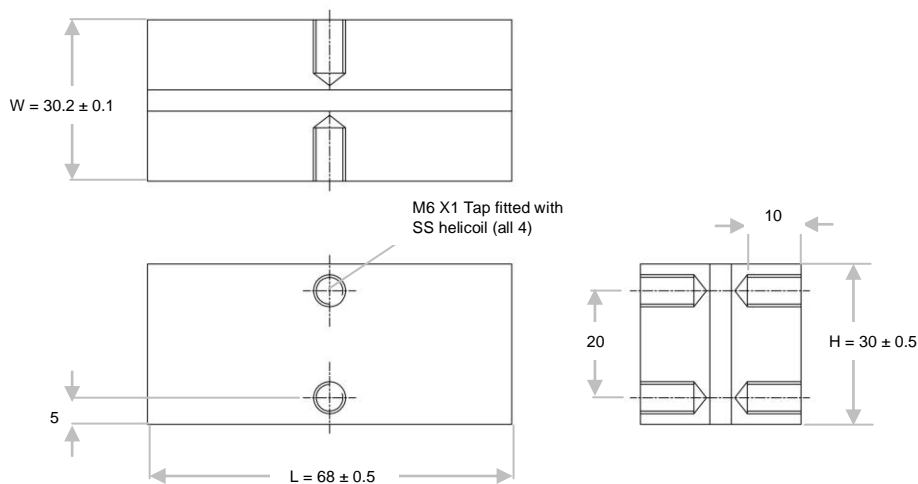

**Torque 15 Nm max.**