


Specification	
Capacity C_{max} (nominal)	1000pF
Capacity C_{min} (nominal)	10pF
Voltage (Peak Test U_{pt} /Peak Working U_{pw})	5kV/3kV
Capacity tolerance (liner Range)	10%
Max. Current I_{max} at 6MHz with Conduction Cooling	80Arms
Capacitance per turn	109pF/turn
Torque	$\leq 0.4Nm$
Net Weight	2kg



I_{max} at ambient and 125 °C surface temp. for convection

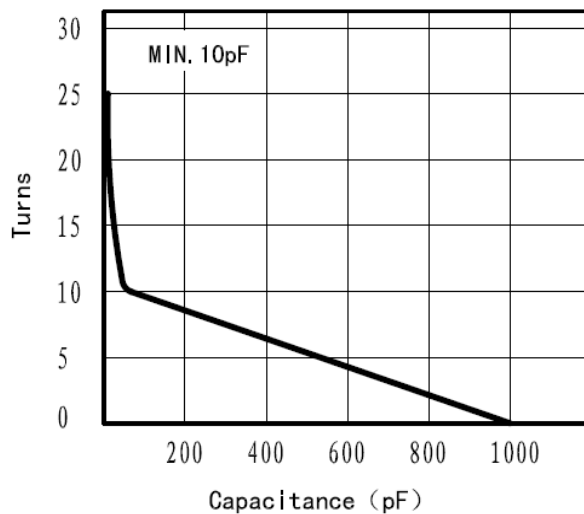