







Specification	
Capacity C _{max} (nominal)	100pF
Capacity C _{min} (nominal)	10pF
Voltage (Peak Test U _{pt} /Peak Working U _{pw})	15kV/9kV
Capacity tolerance (liner Range)	10%
Max.Current Imax at 13.56MHz with	54Arms
Conduction Cooling	15W
Capacitance per turn	8.4pF/turn
Torque	≤0. 2Nm
Net Weight	0. 5kg



Imax at ambient and 125 $^{\circ}\mathrm{C}$ surface temp.for convection and conduction (15w) cooling



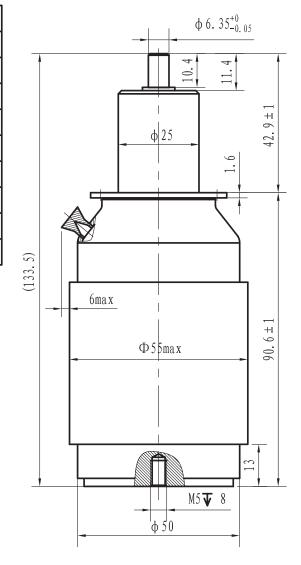





40W267 Keslinger Road PO Box 393, LaFox, IL 60147 USA 1.800.348.5580 (USA & Canada) 1.630.208.2200 (International)

www.rell.com | edg@rell.com