


## **CVB-1500AS**

## Capacitor


6×M6×60° 9MM DEEP


6 × 1/4" - 20UNC × 60° 9MM DEEP


| Specification  |             |
|--|-------------|
| Capacity C <sub>max</sub> (nominal)                                | 1500pF      |
| Capacity C <sub>min</sub> (nominal)                                | 35pF        |
| Voltage (Peak Test U <sub>pt</sub> /Peak Working U <sub>pw</sub> ) | 15kV/9kV    |
| Capacity tolerance (liner Range)                                   | 10%         |
| Max. Current Imax at 2.67MHz with                                  | 160Arms     |
| Conduction Cooling   |             |
| Cappacitance per turn  | 65.9pF/turn |
| Torque   | ≤0. 75Nm    |
| Net Weight   | 6kg         |



50 500 750 1000 1250 1500 Capacitance (pF)



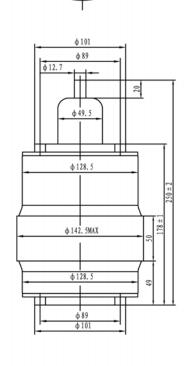





40W267 Keslinger Rd.
PO Box 393, LaFox, IL USA
800-348-5580 (US & Canada)
630-208-2200 ▲ edg@rell.com