


Specification	
Capacity C_{max} (nominal)	500pF
Capacity C_{min} (nominal)	12pF
Voltage (Peak Test U_{pt} /Peak Working U_{pw})	15kV/9kV
Capacity tolerance (liner Range)	10%
Max. Current I_{max} at 3.25MHz with Conduction Cooling	65Arms
Capacitance per turn	25pF/turn
Torque	$\leq 0.27Nm$
Net Weight	2.1kg



I_{max} at ambient and 125 °C surface temp. for convection

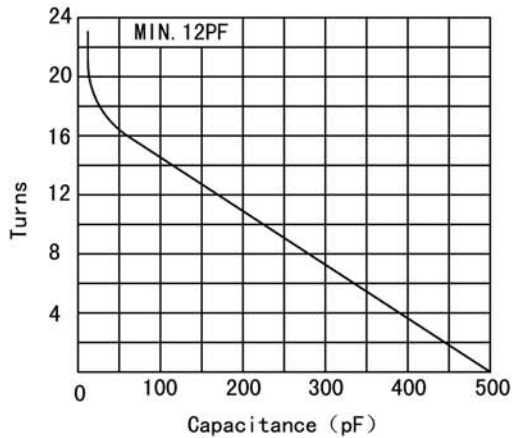