




Specification	
Capacity C _{max} (nominal)	2000pF
Capacity C _{min} (nominal)	100pF
Voltage (Peak Test U _{pt} /Peak Working U _{pw})	35kV/21kV
Capacity tolerance (liner Range)	10%
Max.Current Imax at 13.56MHz with	136Arms
Capacitance per turn	29.9pF/turn
Torque	≤1.5N.m
Net Weight	17 kg



Imax at 25° ambient and 125° surface temp. for convection cooling



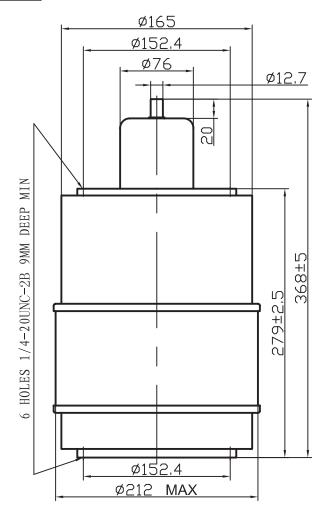



40W267 Keslinger Road PO Box 393, LaFox, IL 60147 USA 1.800.348.5580 (USA & Canada) 1.630.208.2200 (International)