


Specification	
Capacity $C_{max}$ (nominal)	1000pF
Capacity $C_{min}$ (nominal)	60pF
Voltage (Peak Test $U_{pt}$ )	50kV/45kV/40kV
Voltage (Peak Working $U_{pw}$ )	30kV/27kV/24kV
Capacity tolerance (liner Range)	10%
Max. Current $I_{max}$ at 1.87MHz	250Arms
Capacitance per turn	16.4pF/turn
Torque	$\leq 1.5Nm$
Net Weight	15kg



BOTH ENDS ALTERNATING 6  
HOLES 1/4-20 UNC-2B 10 mm  
DEEP AND 6 x M6 DEEP 10mm.

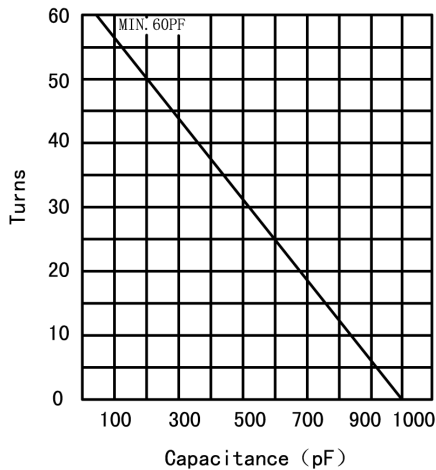