


Specification	
Capacity $C_{max}$ (nominal)	1600pF
Capacity $C_{min}$ (nominal)	100pF
Voltage (Peak Test $U_{pt}$ /Peak Working $U_{pw}$ )	40kV/24kV
Capacity tolerance (liner Range)	10%
Max. Current $I_{max}$ at 13.56MHz with	633Arms
Water Cooling	25L/min
Capacitance per turn	36.3pF/turn
Torque	$\leq 1.5Nm$
Net Weight	24kg



$I_{max}$  for 25l/min water cooling ; max. water temp. at inlet 70°C;  
 fix end has to be cooled with min 50w.

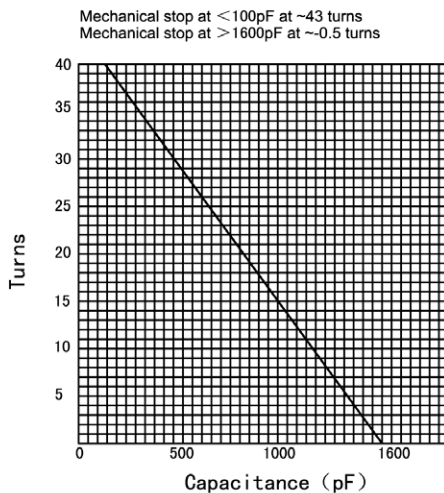