



D77 Discs 10-20kVDC

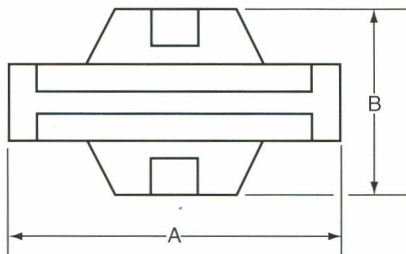

High permittivity, low loss, zero temperature coefficient material specially formulated for broadcast transmitter tuning circuits.

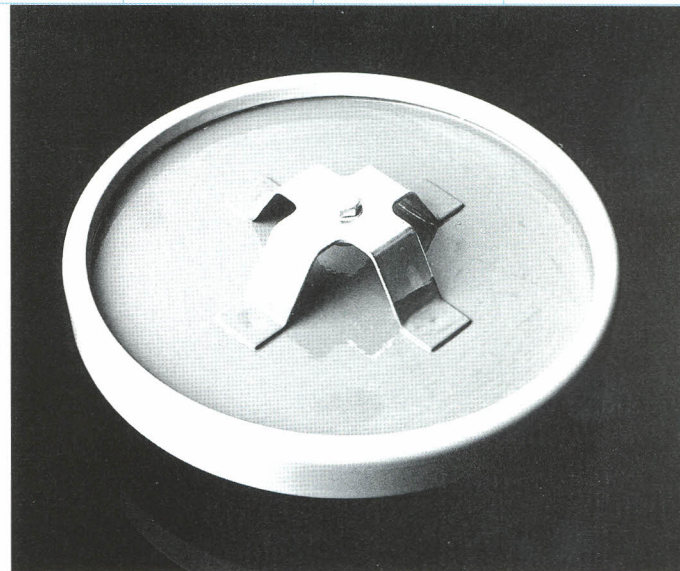


ELECTRICAL CHARACTERISTICS


DIMENSIONS

Type	Cap Value pf±5%	TCC ppm /°C	RATED VOLTAGE			Max POWER RATING (kVA _r)	Max CURRENT RATING (A rms)	øA (mm)	B (mm) Nom.	THREAD SIZE (mm)
			Rated AC+DC kV	AC kVpk	Test 50Hz (kVrms)					
918	1000	0	14	14	14	125	60	140	61	M6
918	1500	0	14	14	14	125	60	140	60	M6
918	2000	0	10	10	10	125	60	140	58	M6


Type 918 Cap 1000pF

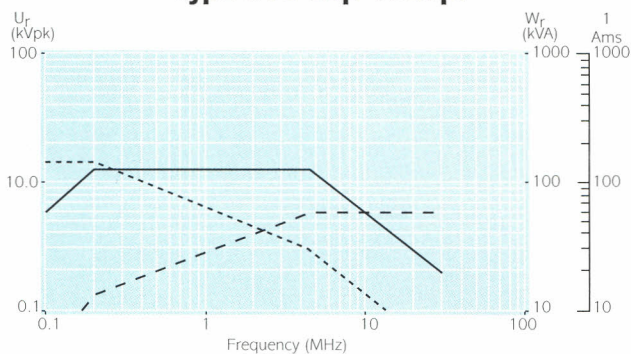

Type 918 Cap 2000pF

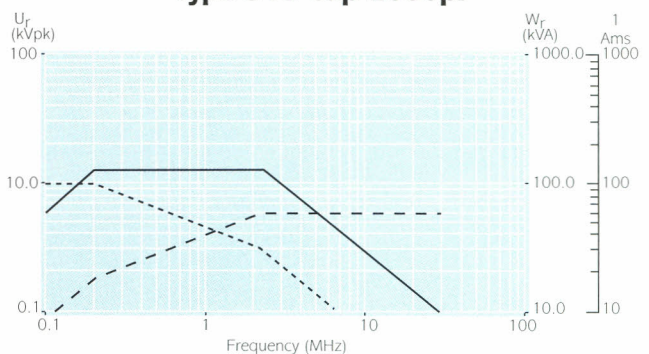

With Moisture Protection

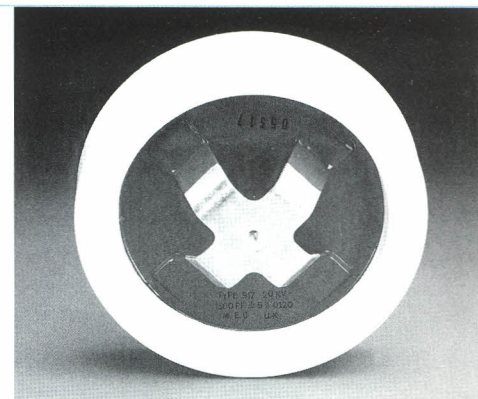

917	1000	0	20	20	20	115	60	152	61	M6
917	1500	0	20	20	20	115	60	152	60	M6