
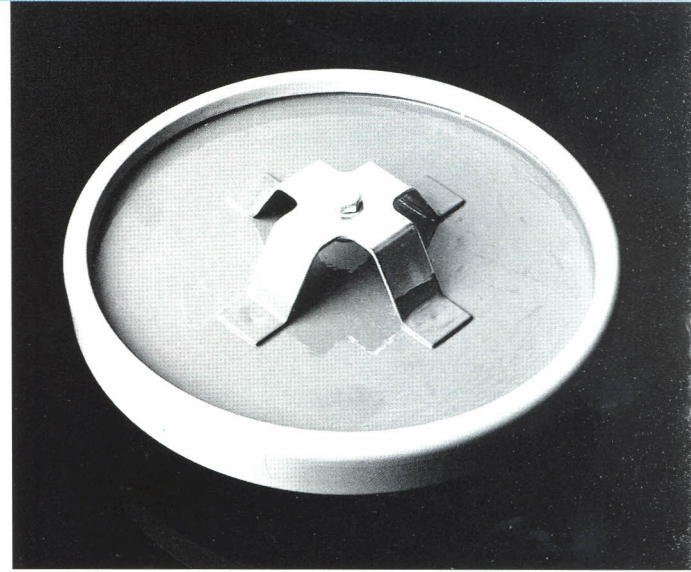


# Discs 10-20kVDC

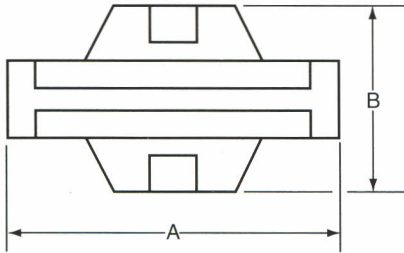


**ELECTRICAL CHARACTERISTICS**

**DIMENSIONS**

Type	Cap Value pf±20%	TCC ppm /°C	RATED VOLTAGE			Max POWER RATING (kVA <sub>r</sub> )	Max CURRENT RATING (A rms)	øA (mm)	B (mm) Nom.	THREAD SIZE (mm)
			Rated AC+DC kV	AC kVpk	Test 50Hz (kVrms)					
807	2000	-750	14	14	14	150	60	200	45	M10
807	2500	-750	14	14	14	150	60	200	45	M10
807	3000	-750	14	14	14	150	60	200	45	M10
807	4000	-750	13	13	13	150	60	200	45	M10
807	5000	-750	12	12	12	150	60	200	45	M10
807	6000	-750	10	10	10	150	60	200	45	M10
808	5000	-1300	13	13	13	150	60	200	45	M10
808	6000	-1300	12	12	12	150	60	200	45	M10

## With Moisture Protection

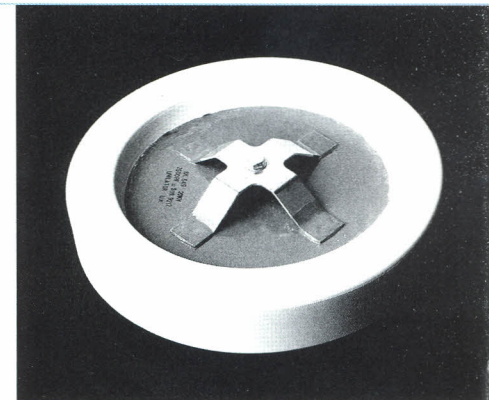

809	2000	-750	20	20	20	140	60	225	45	M10
809	2500	-750	20	20	20	140	60	225	45	M10
809	3000	-750	17	17	17	140	60	225	45	M10
809	4000	-750	13	13	13	140	60	225	45	M10
809	5000	-750	12	12	12	140	60	225	45	M10
809	6000	-750	10	10	10	140	60	225	45	M10
810	5000	-1300	20	20	20	140	60	225	45	M10
810	6000	-1300	20	20	20	140	60	225	45	M10
810	7000	-1300	15	15	15	140	100	225	45	M10
810	8000	-1300	15	15	15	140	100	225	45	M10
810	10000	-1300	13	13	13	140	100	225	45	M10