


LS ULTRACAPACITOR

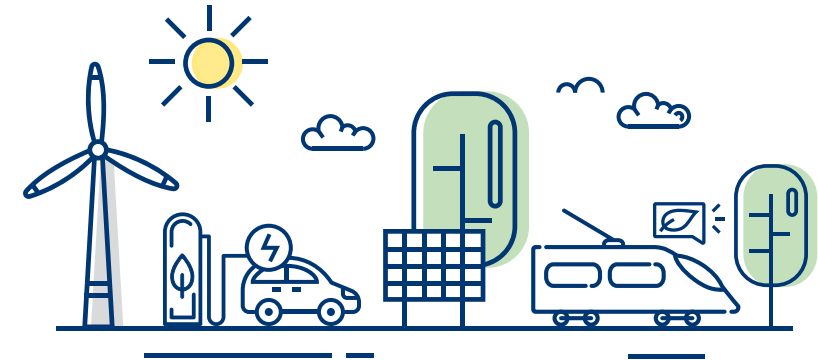

# LS ULTRACAPACITOR

New-generation Energy Storage Devices with  
Great Power and Reliability

**LS** Mtron  
www.lsmtron.com  
www.ultracapacitor.co.kr

**Contact Information** | Tel. +82-31-8045-9598  
E-mail. jsp@lsmtron.com


LS Mtron Hi-tech center, 39, 116 beon-gil, LS-ro, Dongan-gu, Anyang-si, Gyeonggi-do, 14118, Korea

©2020 LS Mtron, Ltd. All right reserved. This product or document is protected by copyright and distributed under licenses restricting its use, copying, distribution, and decompilation.  
No part of this product or document may be reproduced in any form by any means without prior written authorization of LS Mtron and its licensors, if any.

LS Mtron, Ltd. All right reserved **August 2020**

**LS** Mtron



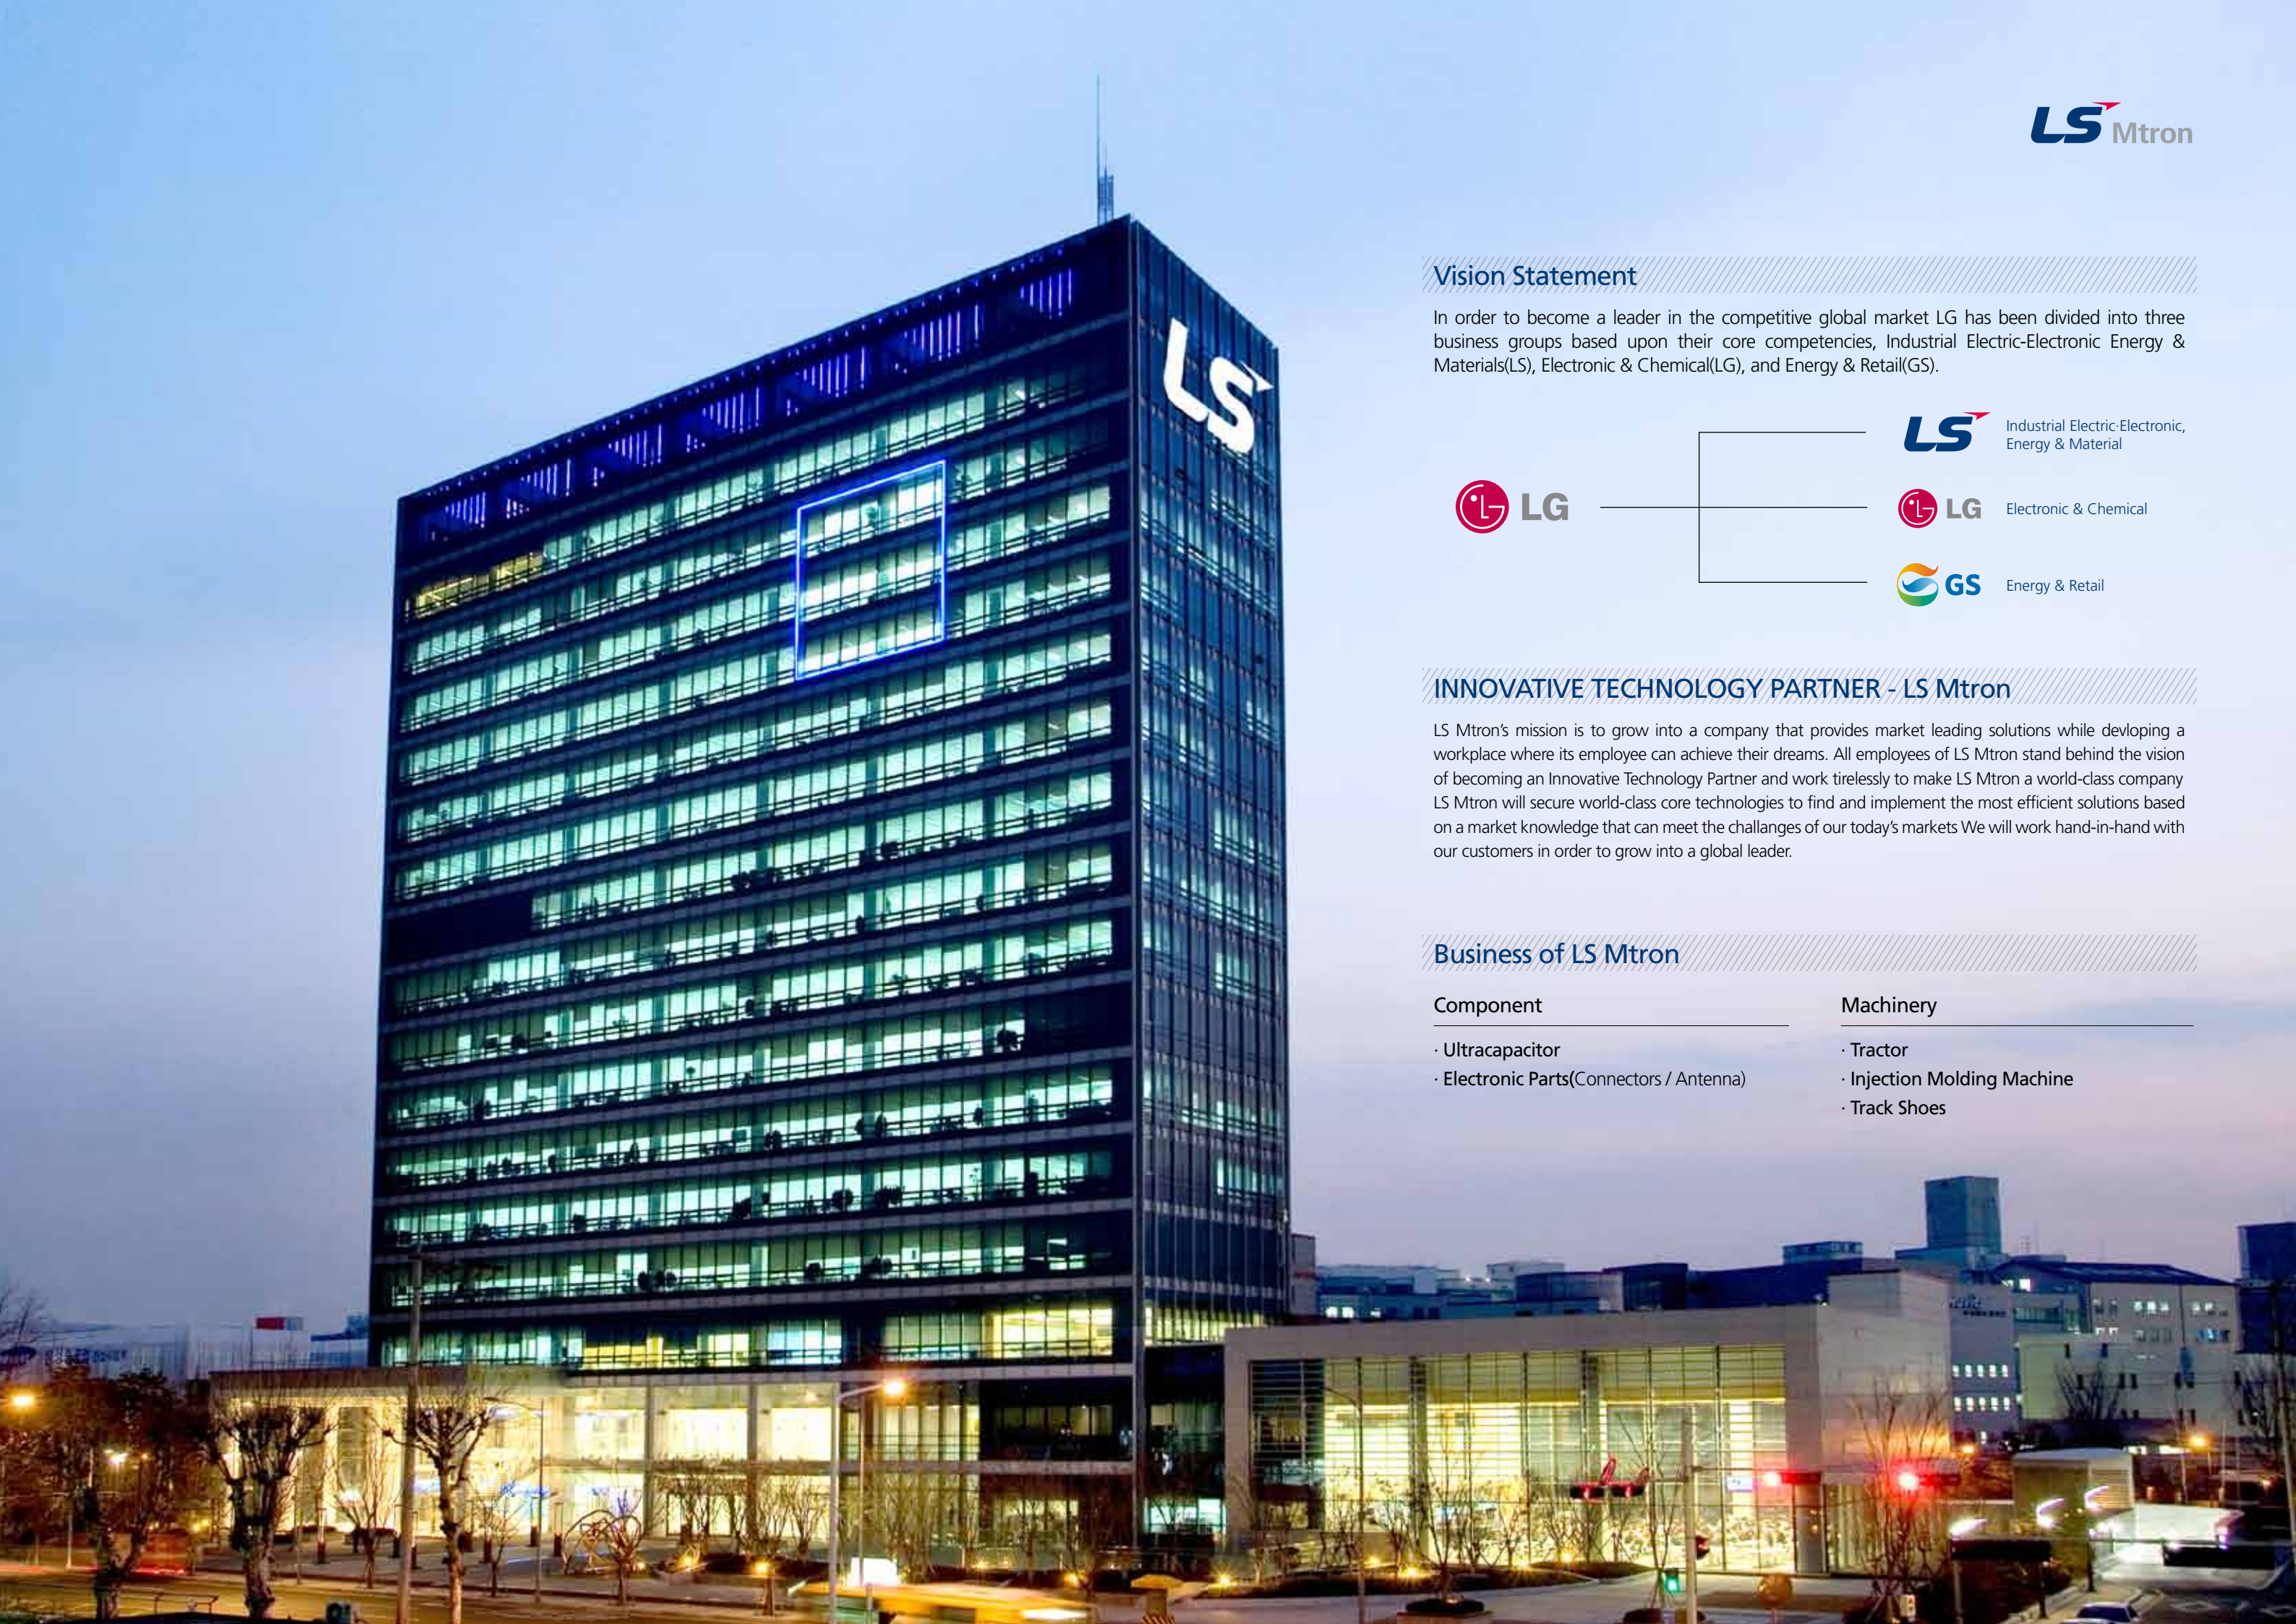

Vision Statement

In order to become a leader in the competitive global market LG has been divided into three business groups based upon their core competencies, Industrial Electric-Electronic Energy & Materials(LS), Electronic & Chemical(LG), and Energy & Retail(GS).



INNOVATIVE TECHNOLOGY PARTNER - LS Mtron

LS Mtron's mission is to grow into a company that provides market leading solutions while developing a workplace where its employee can achieve their dreams. All employees of LS Mtron stand behind the vision of becoming an Innovative Technology Partner and work tirelessly to make LS Mtron a world-class company LS Mtron will secure world-class core technologies to find and implement the most efficient solutions based on a market knowledge that can meet the challenges of our today's markets We will work hand-in-hand with our customers in order to grow into a global leader.

Business of LS Mtron

Component	Machinery
· Ultracapacitor	· Tractor
· Electronic Parts(Connectors / Antenna)	· Injection Molding Machine
	· Track Shoes





## LS ULTRACAPACITOR

LS Ultracapacitor energy storage devices are positioned between conventional electrolytic capacitors and rechargeable batteries.

LS Ultracapacitors feature high power, high energy, reliability and long life which enables use in a variety of applications such as back-up power, auxiliary power, instantaneous power compensation and peak power compensation.

- Rated voltage : up to 3.0V
- High power performance (vs. Battery)
- High energy performance (vs. Conventional electrolytic capacitor)
- Environmentally friendly
- Maintenance-free
- Wide operating temperature range (-40°C ~ +65°C)




# Introduction to LS Ultracapacitor Technology

# Ultracapacitor VS LIB

## Structure


An Ultracapacitor consists of two electrodes immersed in an electrolyte and a separator which prevents the charge from moving between two electrodes of opposite polarity.

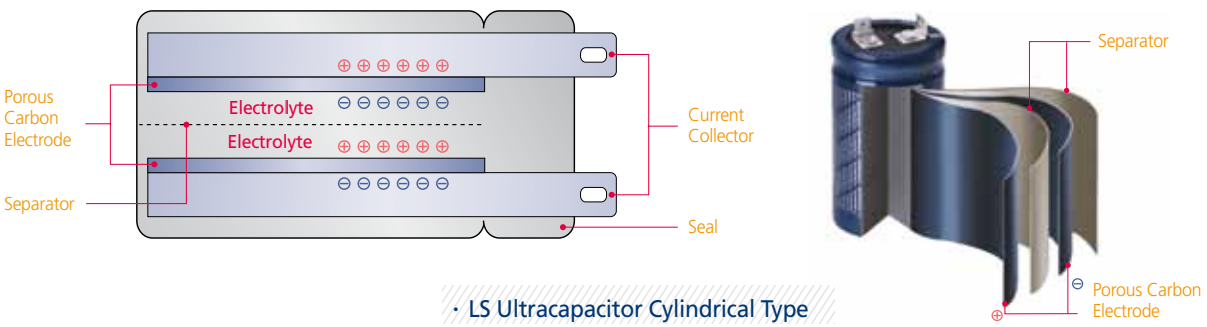


LS Mtron provides optimal package design to provide the best in performance and reliability.

## High Energy & High Power

Ultracapacitors are unique energy storage devices offering high power and high energy simultaneously, compared with conventional electrolytic capacitors and batteries. The high energy stored by Ultracapacitors in comparison to conventional electrolytic capacitors is derived from activated carbon electrode material having the extremely high surface area and the short distance of charge separation created by the opposite charges in the interface between electrode and electrolyte.

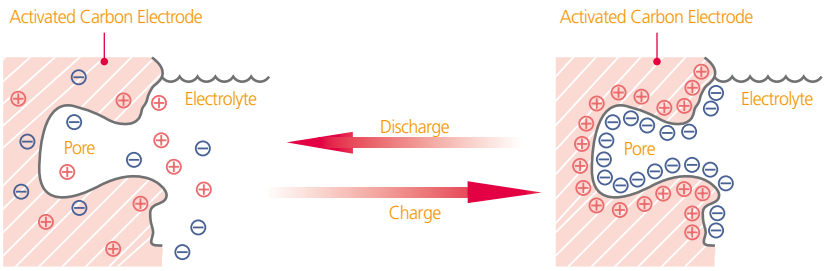

High power, long shelf and cycle life performance of Ultracapacitors originate in the energy storage mechanism differing from batteries. With batteries, energy is stored and released via chemical reaction inside electrode material that causes degradation of the entire system. On the other hand, Ultracapacitors use physical charge separation phenomena between the charge on an electrode and ions in electrolyte at the interface. Since the charge and discharge processes are purely physical and highly reversible, Ultracapacitors can release energy much faster and with more power compared to batteries which rely on slow chemical reactions and can be cycled hundreds of thousands of times without significant effect on performance.

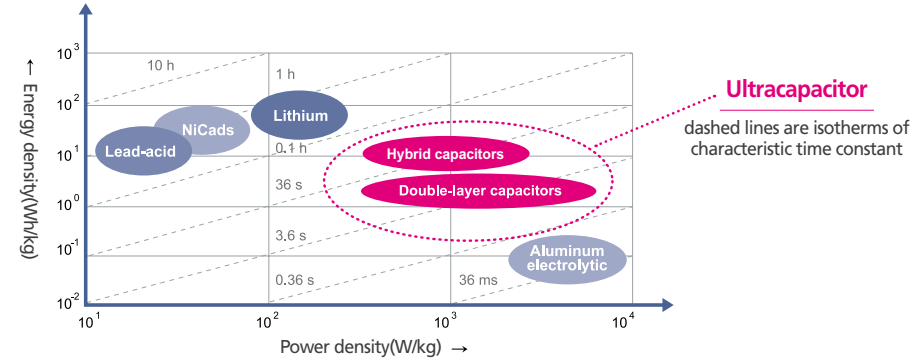

## Ultracapacitor



### Fast and Versatile

#### Physical absorption-desorption

- Specific energy : ~15 W-h/kg
- Operation Temperature : -40 ~ 85°C
- Charge/discharge efficiency : 99.2 ~ 99.8 %
- Specific Power : ~ 18 kW/kg
- Cycle durability : 1000k Cycles

· Ultracapacitor

## Li-ion Battery



### High Energy

#### Chemical reaction

- Specific energy : ~200 W-h/kg
- Operation Temperature : 0 ~ 45°C
- Charge/discharge efficiency : 80~90%
- Specific Power : ~0.2 ~ 0.4 kW/kg
- Cycle durability : 0.4k Cycles

· Li-ion Battery

## Ultracapacitor + Li-ion Battery



### By combining Ultracapacitor and Li-ion battery

Ultracapacitor provides substantial benefits in terms of performances battery life and energy economy

- To improve the application efficiency and energy economy over variable operating conditions
- To assure reliable performance and fast response even with battery degradation
- To extend battery life by shaving peak load





# Cell

LS Mtron has more than 45 types of cells in mass production

## 22Ø Series

PCB mounting type cell

Series	Rated Voltage	Capa citance	Part No.	Max. ESR(DC)	Max. Current	Leakage Current	Max. Stored Energy	Weight	Type	Dimension
	V	F		mΩ	A	mA	Wh	kg		∅ x mm
22	2.8	100	LSUC 002R8S 0100F EA	9.0	74	<0.3	0.10	0.023	Snap-in	22 x L46
		120	LSUC 002R8S 0120F EA	9.0	81	<0.4	0.13	0.023		22 x L46
	3.0	100	LSUC 003R0S 0100F EA	9.0	79	<0.3	0.12	0.023		22 x L46

## 33Ø Series

PCB mounting type cell

Series	Rated Voltage	Capa citance	Part No.	Max. ESR(DC)	Max. Current	Leakage Current	Max. Stored Energy	Weight	Type	Dimension
	V	F		mΩ	A	mA	Wh	kg		∅ x mm
33	2.8	360	LSUC 002R8L 0360F CU03	3.2	234	<1.0	0.39	0.065	Lug	33 x L61

## 35Ø Series

PCB mounting type cell

Series	Rated Voltage	Capa citance	Part No.	Max. ESR(DC)	Max. Current	Leakage Current	Max. Stored Energy	Weight	Type	Dimension
	V	F		mΩ	A	mA	Wh	kg		∅ x mm
35	2.8	320	LSUC 002R8L 0320F EM	2.0	273	<1.0	0.34	0.078	Lug	35 x L61
		350	LSUC 002R8L 0350F EA	3.2	231	<1.0	0.38	0.072		35 x L61
		400	LSUC 002R8L 0400F EA	3.0	255	<1.0	0.43	0.080		35 x L66
		450	LSUC 002R8L 0450F EA	3.0	268	<1.0	0.49	0.088		35 x L71
		600	LSUC 002R8L 0600F EA	3.2	288	<1.3	0.65	0.090	Lug or Snap-in	35 x L71
		720	LSUC 002R8L 0720F EA	2.0	413	<1.5	0.78	0.130		35 x L105
	3.0	380	LSUC 003R0L 0380F EA	3.2	257	<1.0	0.47	0.072		35 x L61
		430	LSUC 003R0L 0430F EA	3.0	282	<1.0	0.53	0.080		35 x L66
		480	LSUC 003R0L 0480F EA	3.0	295	<1.2	0.60	0.088		35 x L71

## 60Ø Series

Busbar connection type cell

Series	Rated Voltage	Capa citance	Part No.	Max. ESR(DC)	Max. Current	Leakage Current	Max. Stored Energy	Weight	Type	Dimension
	V	F		mΩ	A	mA	Wh	kg		∅ x mm
60	2.7	650	LSUC 002R7C 0650F NH	0.57	640	<1.5	0.65	0.200	Cylindrical	60 x L51.5
		1200	LSUC 002R7C 1200F NH	0.33	1160	<2.7	1.21	0.280		60 x L74
		1500	LSUC 002R7C 1500F NH	0.28	1426	<3.0	1.51	0.320		60 x L85
		2000	LSUC 002R7C 2000F NH	0.27	1753	<4.0	2.02	0.380		60 x L102
		3000	LSUC 002R7C 3000F NH	0.23	2396	<5.0	3.03	0.515		60 x L138
	2.85	3400	LSUC 003R0C 3400F NH	0.23	2719	<8.0	3.83	0.515		60 x L138
	3.0	3000	LSUC 003R0C 3000F NH	0.23	2663	<5.0	3.75	0.515		60 x L138
		3400	LSUC 003R0C 3400F NH	0.23	2800	<8.0	4.25	0.515		60 x L138

\*Max. Current : Non-repeated (Calculated value)  
\*Operating Temperature Range : -40 ~ 65°C

## Products



• 2.8/3.0V Lug & Snap-in Type Cell



• Cylindrical Type Cell

### Lug & Snap-in Terminal Type




• Snap-in (100F/ 120F) • Lug (320F ~ 600F) • Snap-in (4pin, 350F ~ 600F)

### Cylindrical Terminal Type



• Short Screw (ST01) • Weldable (WT01) • Long Screw (LT01) M16 Terminal • Long Screw (LT02) M12 Terminal

## Cell/Module Part No. Rule

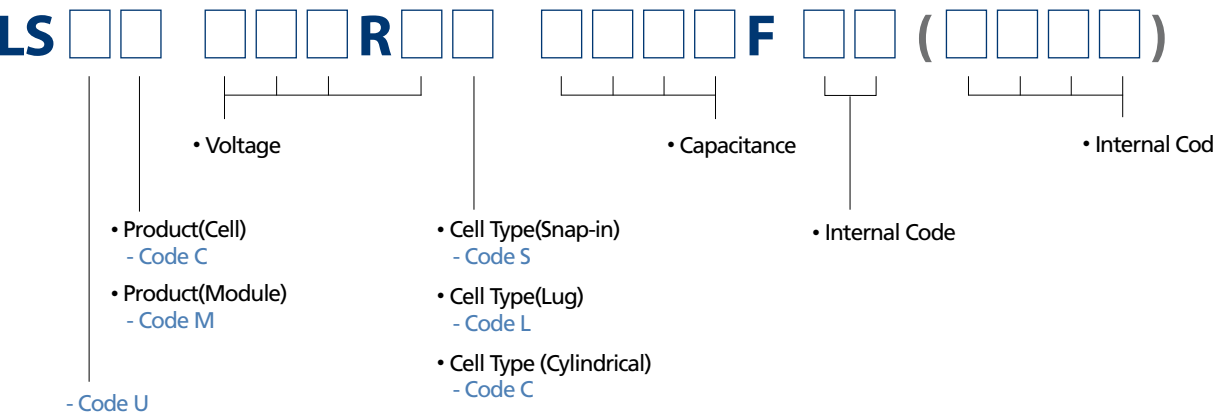

Module LS Mtron has more than 20 types of modules in mass production

PCB type series PCB type Series is modules built up with 22Ø & 33Ø series cells on PCB board

Part No.	Rated Voltage	Capa- citance	Max. ESR(DC)	Max. Continuous Current (ΔT = 40°C)	Leakage Current	Stored Energy	Weight	Balancing	Monitoring	Dimension
	V	F	mΩ		mA	Wh	kg			L x W x H (mm)
LSUM 016R8L 0058F EA	16.8	58	22	20	<11.0	2.3	0.7	Active or Passive	-	245 x 47 x 76.6
LSUM 168ROL 0005F EA	168	5.8	240	12	<25.0	22.7	6.5	Passive	Temperature(NTC)/Half Voltage monitoring	235 x 367 x 79
LSUM 403R2L 0004F EA	403.2	4.1	400	25	<35.0	92.6	23.0	Passive	Temperature(NTC)/Over Voltage	795 x 185 x 179.5



LSUM 016R8L 0058F EA



LSUM 168ROL 0005F EA



LSUM 403R2L 0004F EA

Busbar type series Busbar type Series is modules built up with 60Ø series cells connected with busbar

Part No.	Rated Voltage	Capa- citance	Max. ESR(DC)	Max. Continuous Current (ΔT = 40°C)	Leakage Current	Stored Energy	Weight	Balancing	Monitoring	Dimension
	V	F	mΩ		mA	Wh	kg			L x W x H (mm)
LSUM 016R2C 0500F EA	16.2	500	1.7	200	<5.0	18.2	5.6	Active or Passive	Temperature(NTC)	67.2 x 416.2 x 175.9
LSUM 032R4C 0250F EA	32.4	250	3.3	150	<11.0	36.5	10.0	Passive	-	137.1 x 426.6 x 184
LSUM 048R6C 0166F EA DC	48.6	166	5.0	130	<5.0	54.5	14.0	Active or Passive	Temperature(NTC)/Over Voltage	194.5 x 419.5 x 177
LSUM 051R3C 0166F EA	51.3	166	5.0	100	<28.5	60.7	12.0	Active or Passive	Temperature(PTC)/Over Voltage	590.4 x 136 x 171
LSUM 086R4C 0093F EA	86.4	93	11.3	80	<120.0	96.4	27.0	Passive	Temperature(PT100)	517 x 265 x 210.5
LSUM 129R6C 0062F EA	129.6	62	13.2	240	<5.0	144.6	55.0	Active or Passive	Temperature & Voltage(CAN 2.0B)	720 x 405 x 226



LSUM 016R2C 0500F EA



LSUM 032R4C 0250F EA



LSUM 048R6C 0166F EA DC



LSUM 051R3C 0166F EA



LSUM 086R4C 0093F EA



LSUM 129R6C 0062F EA

- Leakage Current can be changed by Balancing method
- Customized module can be supplied under the customer's requirement
- NTC Thermistor & Group voltage monitoring is analog method

CTC Description

CTC (Cell to Cell) series module can be made up with connected cells (60Ø Series cell) at customer's request  
The CTC module can be made from 16V up to 108V without additional development with extendable module case



Monitoring for CTC series module

Temperature sensor	Temperature interface	Connector	Cell voltage monitoring	Balancing
NTC Thermistor	Analog	4pin	OVA(Optional)	Active or Passive

CTC series CTC (Cell To Cell) series module is available from 16V to 108V, is extendable and customizable without additional costs to the customer

Part No.	Adapted Cell Module			Rated Voltage	Capa- citance	Max. ESR(DC)	Max. Continuous Current (ΔT = 40°C)	Leakage Current	Stored Energy	Weight	Dimension
	Rated Voltage	Capacitance	Series								
LSUM 048R6C 0066F EA YJ	2.7	1200	18	48.6	66	7.2	160	< 2.7 (Active)	21.7	10.3	279 x 418 x 71
LSUM 064R8C 0050F EA YJ			24	64.8	50	9.6	130	< 27 (Passive)	29.2	13.2	362 x 418 x 71
LSUM 048R6C 0083F EA YJ		1500	18	48.6	83	6.1	180	< 3.0 (Active)	27.2	11.5	312 x 418 x 71
LSUM 064R8C 0062F EA YJ			24	64.8	62	8.1	140	< 27 (Passive)	36.2	14.8	406 x 418 x 71
LSUM 048R6C 0111F EA YJ		2000	18	48.6	111	5.9	180	< 4.0 (Active)	36.4	13.5	363 x 418 x 71
LSUM 064R8C 0083F EA YJ			24	64.8	83	7.8	150	< 27 (Passive)	48.4	17.5	474 x 418 x 71
LSUM 048R6C 0166F EA YJ		3000	18	48.6	166	5.0	200	< 5.0 (Active)	54.5	17.2	471 x 418 x 71
LSUM 064R8C 0125F EA YJ			24	64.8	125	6.7	160	< 27 (Passive)	72.9	22.5	618 x 418 x 71
LSUM 016R2C 0250F EA AG	2.7	1500	6	16.2	250	2.0	150	< 3.0 (Active) < 27 (Passive)	9.1	3.9	311 x 166 x 70
LSUM 016R2C 0500F EA AG		3000			500	1.7	200	< 5.0 (Active) < 27 (Passive)	18.2	5.9	470 x 166 x 70



LSUM 048R6C 0166F EA YJ



LSUM 016R2C 0500F EA AG



LSUM 016R2C 0250F EA AG

# Ultracapacitor Biz. History

Longest history in the ultracapacitor industry

LS ultracapacitor has 18 years of history in the ultracapacitor industry



# Markets for LS Ultracapacitors



## AGV

- Numerous charge & discharge cycles, long life span
- Peak power shaving, minimizing power infrastructure investment
- Energy saving



## Wind Turbine

- Maintenance free in all environments and long service life
- Ultra-safe, eliminating concerns for fire or explosion



## Power Quality Solution (UPS)

- Instant back up for voltage sag or dip
- Maintenance free for up to 20 years
- Ultra-safe, eliminating concerns for fire or explosion



## Hybrid Heavy Equipment

- Peak power shaving, downsizing motor and engine requirement
- Improve fuel economy and meet emission regulations
- Long service life and maintenance free



## Passenger Car and Vehicle

- Stabilize DC power supply and extend battery life
- Improve fuel economy by reducing alternator loadings
- Jumpstart in all seasons



## Transportation

- Numerous charge & discharge cycles, maintenance free
- Capture regenerative braking energy, improving energy efficiency
- Ultra-safe, eliminating concerns for fire or explosion




## Hybrid Harbor Crane

- Peak shaving and reduction, improving crane reliability
- Significant savings in power infrastructure investment
- Long term return in energy savings




## HEV (Hybrid Electric Vehicle)

- Provide peak power, extending battery life
- Capture regenerative braking energy
- Jumpstart in all seasons



## Photovoltaic and Solar Lighting

- Provides a reliable ESS solution in extreme environments
- Long service life and maintenance free



## Etc.

- Adaptable and serviceable in all environments
- Maintenance free, excellent investment return
- Instant and huge power supply



• IATF 16949



• ISO 14001:2015



• OHSAS18001:2007




• UL Certification




# LS Mtron International Business Locations

Secured **10** overseas bases

including China, Brazil, USA, and Vietnam

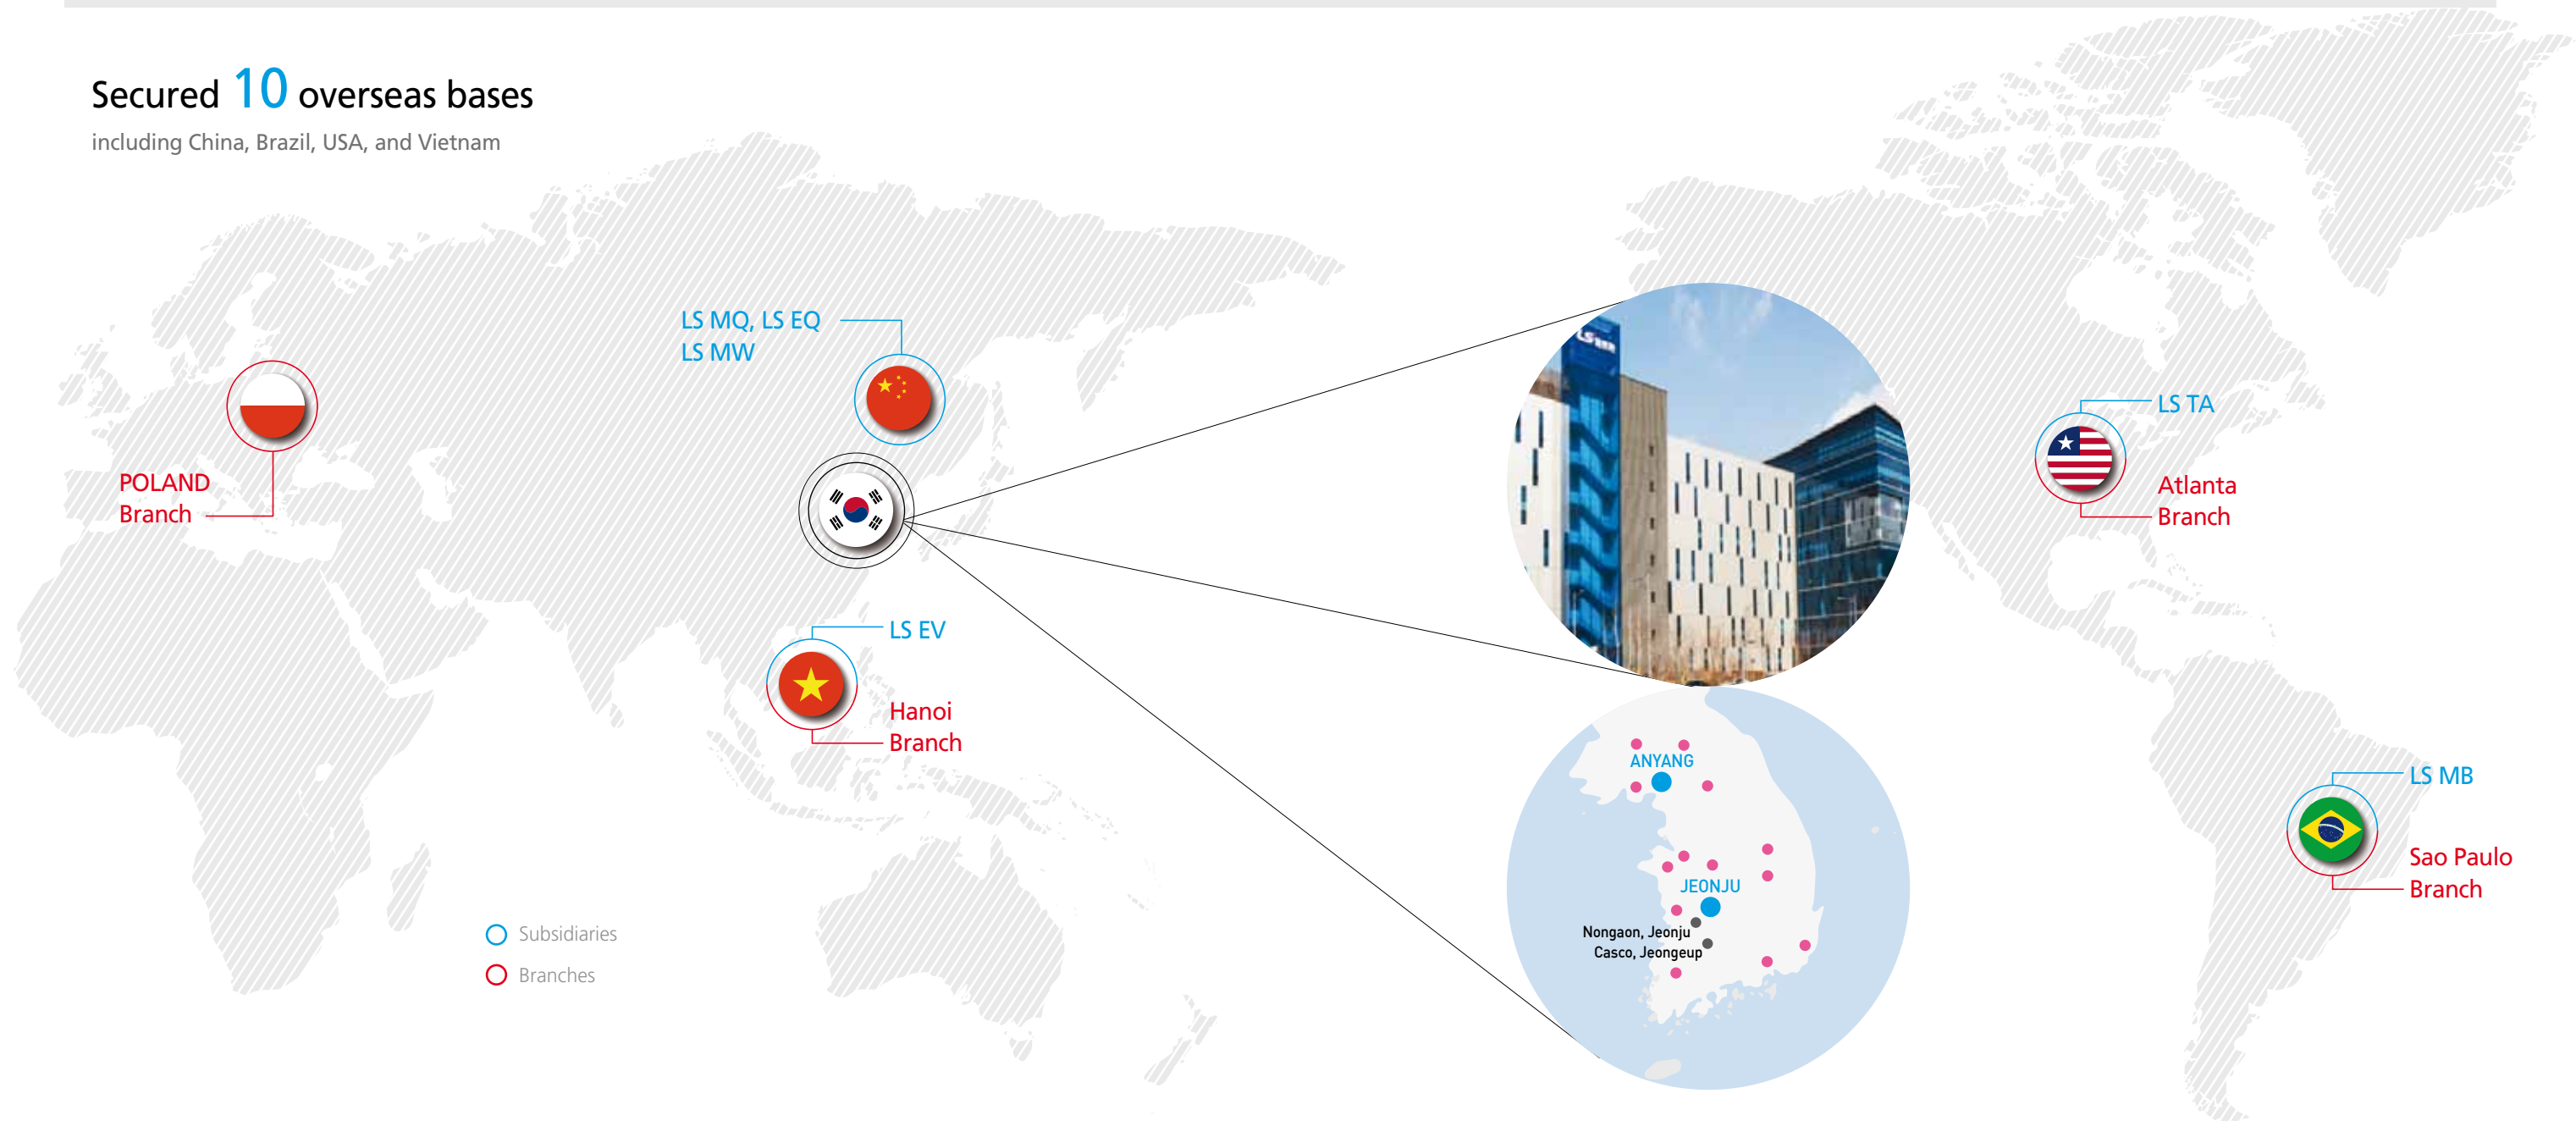

Growth of international subsidiaries and foothold

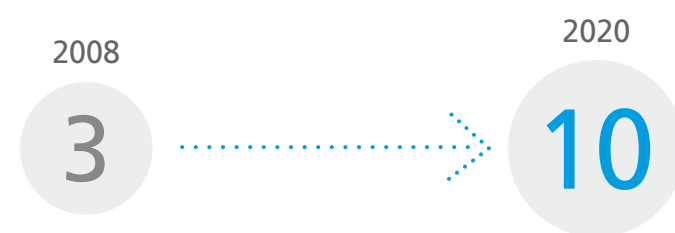

LS TOWER, Hi-Tech Center



Head office, Electronic Components, Ultracapacitors, R&D Center, Sales

Jeonju Plant, Engine Plant



Tractors, Injection Molding Systems, Track Shoes, Tractor Engine