


# IGBT SNUBBER CAPACITORS

- Direct Mounting ▪ Axial

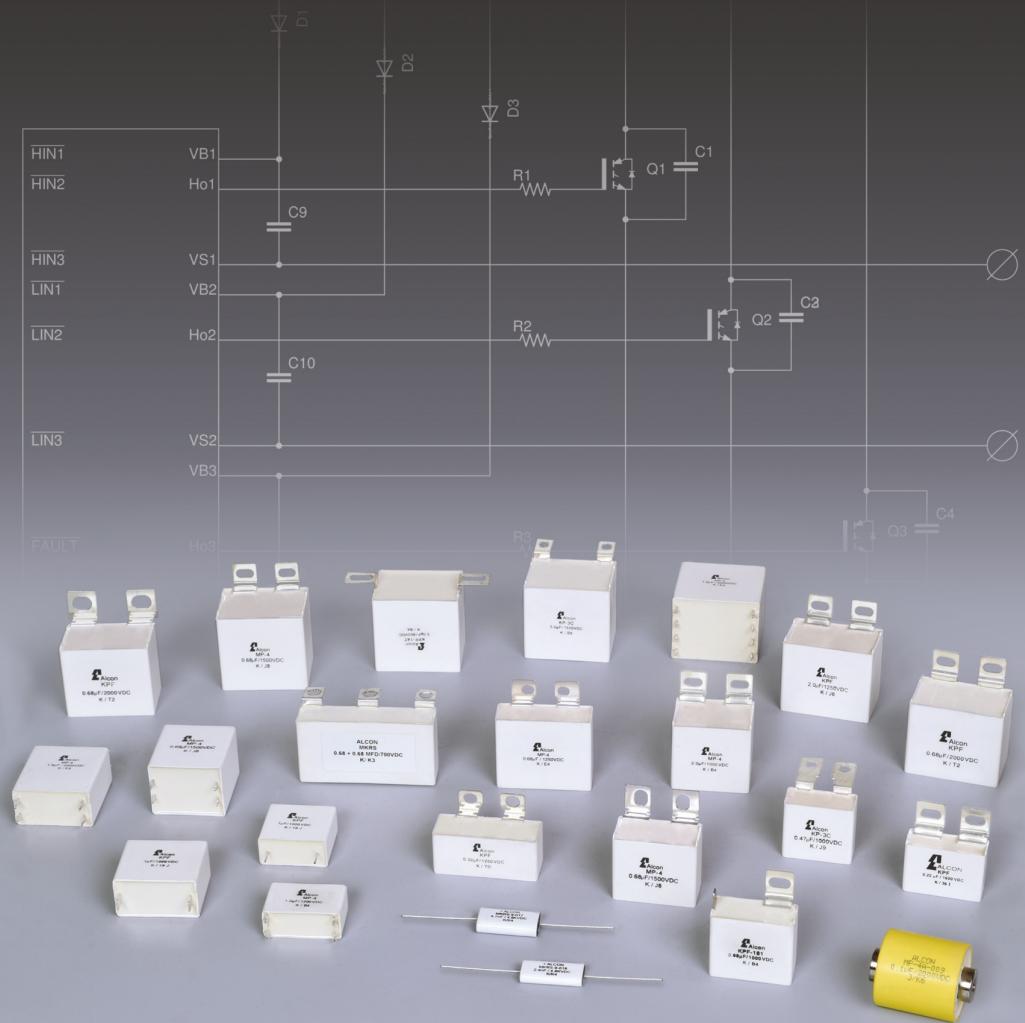

## INDEX

### Direct Mounting

- |           |   |   |    |
|-----------|---|---|----|
| ■ MP - 4  | : | Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection | 1  |
| ■ KPF     | : | Extended foil electrodes with metallised polypropylene dielectric internal series connection                        | 14 |
| ■ KP - 3C | : | Extended foil electrodes and polypropylene film dielectric impregnated  | 26 |
| ■ MKRS    | : | Extended maetallised film design with internal series connection  | 35 |

### Axial

- |           |   |   |    |
|-----------|---|---|----|
| ■ MP - 4A | : | Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection | 38 |
| ■ KPF - 9 | : | Extended foil electrodes with metallised polypropylene dielectric internal series connection                        | 44 |
| ■ KP - 6  | : | Extended foil electrodes and polypropylene film dielectric impregnated  | 49 |

### Part Number System

- |  |    |
|--|----|
| ■ Cautions For Proper Use Of Film Capacitors | 55 |
|--|----|



ISO 9001-2015  
Quality Standard



ISO 14001-2015  
Environmental Standard



ISO 45001-2018  
Health and Saftey Standard

Alcon started manufacturing aluminium electrolytic capacitors for the Indian entertainment electronics industry in 1977. Over the years the focus has shifted and Alcon now manufactures a large range of high CV screw terminal type aluminium electrolytic capacitors and a large variety of film capacitors for power electronic applications. The range of film capacitors now includes 3 types namely, IGBT snubber capacitors (direct mounting with - different terminals styles to suit all types of power IGBT modules), DC Link capacitors for high frequency application in power electronic and Power film capacitors which are designed for application involving wide operating frequency range of 5 kHz to 1 MHz, high current ratings of 200 to 1250 Arms and voltage ratings of 400 to 1200 Vrms.

With this enlarged range of capacitors, Alcon caters to the increasing needs of the power electronics sector. To improve market share in India and abroad Alcon has now completed the expansion which has enabled it to create additional manufacturing capacity for all capacitor types mentioned above. With this expansion a new more modern, well equipped R & D Laboratory has been established. This will facilitate further product development at Alcon. This laboratory is equipped to collect application data related to all types of capacitors that will be manufactured. Alcon is now fully equipped to cater to the increasing requirements of the target industries and will therefore fall in line with the Governments plans of " Make in India ". Alcon will not only cater to the needs of the AC drives, UPS systems and the Inverter markets but will also cater to requirements of the industries involved in the manufacture of Wireless Electric Vehicle charging, High Frequency Induction Heating Equipment, Windmill and Solar Inverters, Telecom Equipment, besides a host of many special purpose industrial electronic equipment like Health Care (MRI, CT scan and X-ray) Equipment, Welding and Pulse Magnetizing Equipment, to name only a few.

Alcon has been able to meet the exacting quality criteria and standards of Indian as well discerning customers in USA, Germany, Italy, UK, Japan, Norway, Sweden, Denmark, South Korea, Turkey and even the very price conscious customers in China. Alcon believes that quality has to be built into the entire manufacturing process. The finest end products are assured by using the finest inputs, proven technology, modern production processes and equipment's and stringent quality control. Alcon is registered to ISO 9001, ISO 14001 and ISO 45001 signifying Alcon's commitment to quality, reliability and environment protection on the one hand and to safety as per international standards, on the other.

Designing capacitors for special applications requires an in-depth understanding of the application, knowledge of changing technologies, the ability to develop innovative technology concepts and finally, incorporate these concepts into the capacitors design & manufacturing processes. This would give the users high reliability and high performance products. Alcon's capability to make custom designed capacitors is well known. One of Alcon's significant advantage is that every stage of product development and innovation is evaluated in terms of changing technologies and user needs. Custom designed capacitors allow the user to select the right capacitor at the most viable price. Custom-designed capacitors account for almost 50% of Alcon's sales. It is also for this reason that Alcon today exports about 30% of its production and after the current planned expansion the company's target is to export 50% of its annual production. To enable the company to work effectively towards this objective Alcon's range of aluminium electrolytic capacitors now have CE marking and its range of DCL - 41 DC-Link Capacitors are UL approved.




At Alcon, responsiveness to customers needs is an integral part of our marketing strategy. We work with customers, to understand their production operations and application needs, analyse problems and offer optimum and cost effective solutions. We do what it takes to satisfy customer requirements. Alcon has a marketing team with component specific knowledge and experience. Our distributors who are located in all important cities in India and in many cities internationally, function as marketing nerve centres and provide timely deliveries to consumers in their region. Alcon has 23 distributors in India and 18 across the Globe. Alcon has received several awards as a recognition of the company's product quality, service, timely delivery and technology. Last fiscal the company received an award from Emerson Network Power India Pvt. Ltd., which was titled "Emerson Vendor appreciation Award." This year we have received an award titled "Supplier Technology Award" from GE Healthcare. This award is for innovative product designs and development of several new products for GE in India. "GE believes that this is the kind of partnership they look forward to in today's uncertain world."

**Alcon's Customers are located in India and in many countries worldwide.**



India : New Delhi, Jaipur, Ahmedabad, Baroda, Bhopal, Mumbai, Pune, **Nashik**, Hyderabad, Bangalore, Chennai, Cochin, Coimbatore Trivandrum & Kolkata

International : Australia, China, Czech Republic, Denmark, Estonia, Finland, Germany, Italy, Ukraine, Japan, Latvia, Lithuania, Netherlands, Poland, Russia Federation, Romania, Slovakia, U.K, USA, South Africa, South Korea, Spain, Sweden, Switzerland, Taiwan, Turkey, France, Dubai, Singapore, Norway, Indonesia, Hongkong

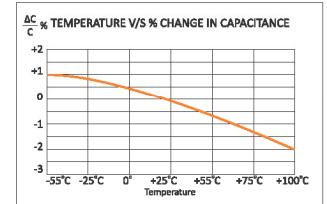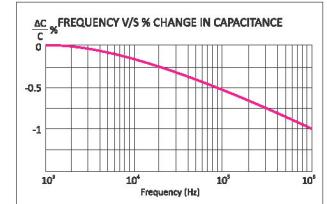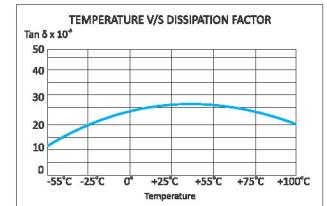
**MP-4**


### Highlights

- Self-healing property
- High DV / DT
- Low ESR
- Low loss polypropylene dielectric
- Reference standard-IEC 61071
- Flame retardant UL94 - V0, ROHS compliant

### Construction



Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection

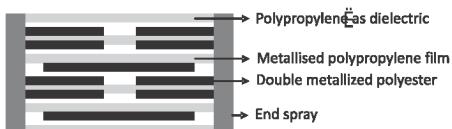

### Applications

These capacitors are used in high voltage, high current and high pulse applications such as:

- IGBT protection circuits
- Snubber networks
- Energy conversion and control in power electronics
- Protection circuits in SMPS

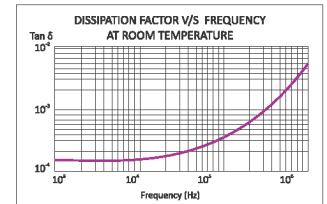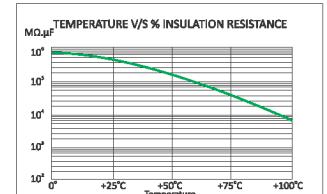



## IGBT SNUBBER CAPACITORS - DIRECT MOUNTING

MP-4

### Technical Specifications

#### Physical Characteristics

- Dielectric material Polypropylene film.
- Electrode material Double metallized polyester and metallized polypropylene film.
- Winding construction Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection
- Enclosure Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

- Capacitance range 0.1 MFD to 6.3 MFD
- Capacity tolerance  $\pm 5\%$ (J),  $\pm 10\%$ (K)
- Rated voltage VDC 700, 850, 1000, 1200, 1500, 2000, 2500, 3000
- Rated voltage VAC 420, 500, 575, 630, 650, 700, 725, 750
- Test voltage between terminals 2 x rated voltage VDC for 2 seconds
- Test voltage terminal to case 3KVAC at 50Hz for 60 seconds
- Dissipation factor ( $\tan \delta$ )  $< 0.0005$  at 1 KHz and  $25^\circ C$
- Temperature range  $-40^\circ C$  to  $+85^\circ C$
- Insulation resistance at  $25^\circ C$  & at a test voltage of 500 VDC applied for 1 minute  $C \leq 0.33$  MFD       $\geq 100,000 M\Omega$   
 $C > 0.33$  MFD       $\geq 30,000 M\Omega$

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company's symbol followed by the words ALCON
- The capacitor grade viz MP-4
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors



## IGBT SNUBBER CAPACITORS - DIRECT MOUNTING

MP-4

### Standard Capacitor Values

#### Working Voltage 700 VDC (420 VAC)

Rated Capacitance MFD	Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & $70^\circ C$ Amps	Typical ESR at 100KHz m $\Omega$	Ordering Code*
1.000	B1	615	615.00	15.50	3.30	SI000010700AH0B1_K01
1.200	H7	615	738.00	17.50	3.10	SI01U200700AH0H7_K01
1.500	H1	615	922.50	19.00	2.80	SI01U500700AH0H1_K01
2.000	H1,H4	615	1230.00	23.50	2.50	SI000020700AH_K01
2.200	H1	615	1353.00	24.00	2.40	SI02U200700AH0H1_K01
2.500	H4	615	1537.50	24.50	2.20	SI02U500700AH0H4_K01
3.000	E3	400	1200.00	27.50	2.10	SI000030700AH0E3_K01
3.300	E3	400	1320.00	28.00	2.10	SI03U300700AH0E3_K01
3.500	C2	400	1400.00	28.50	2.00	SI03U500700AH0C2_K01
4.000	H5,C2	400	1600.00	29.00	2.30	SI000040700AH_K01
4.700	H6,C2	400	1880.00	32.00	2.10	SI04U700700AH_K01
5.000	H6,C2	400	2000.00	32.00	2.10	SI000050700AH_K01
5.600	H6,C2	400	2240.00	33.50	2.00	SI05U600700AH_K01
6.300	H6,C2	400	2520.00	34.50	1.90	SI06U300700AH_K01

#### Working Voltage 850 VDC (500 VAC)

Rated Capacitance MFD	Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & $70^\circ C$ Amps	Typical ESR at 100KHz m $\Omega$	Ordering Code*
0.680	B1	760	516.80	15.00	3.50	SI00U680850AH0B1_K01
0.820	H7	760	623.20	16.50	3.10	SI00U820850AH0H7_K01
1.000	H7	760	760.00	18.50	2.70	SI000010850AH0H7_K01
1.500	H1	760	1140.00	24.50	2.20	SI01U500850AH0H1_K01
1.750	H1,H4	760	1330.00	25.50	2.10	SI01U750850AH_K01
2.000	H4	760	1520.00	28.00	2.00	SI000020850AH0H4_K01
2.200	H4	760	1672.00	28.50	2.00	SI02U200850AH0H4_K01
2.500	H4	760	1900.00	29.00	1.90	SI02U500850AH0H4_K01
3.000	H5,E3	450	1350.00	29.50	2.20	SI000030850AH_K01
3.300	H5,E3	450	1485.00	30.00	2.10	SI03U300850AH_K01
4.000	H6,C2	450	1800.00	33.50	1.90	SI000040850AH_K01
4.700	H6,C2	450	2115.00	34.50	1.80	SI04U700850AH_K01
5.600	H6,C2	360	2016.00	28.50	3.20	SI05U600850AH_K01

#### Working Voltage 1000 VDC (575 VAC)

Rated Capacitance MFD	Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & $70^\circ C$ Amps	Typical ESR at 100KHz m $\Omega$	Ordering Code*
0.470	B1	880	413.60	14.00	3.90	SI00U471000AH0B1_K01
0.680	H7	880	598.40	16.50	3.30	SI00U681000AH0H7_K01
0.750	H7,H1	880	660.00	17.50	3.10	SI00U751000AH_K01
1.000	H1	880	880.00	22.50	3.10	SI000011000AH0H1_K01
1.200	H1	880	1056.00	23.50	2.50	SI01U201000AH0H1_K01
1.500	H1	880	1320.00	25.00	2.20	SI01U501000AH0H1_K01
1.750	H4	880	1540.00	27.00	2.10	SI01U751000AH0H1_K01
2.000	H4	880	1760.00	28.00	2.00	SI000021000AH0H4_K01
2.200	H4	750	1650.00	24.00	3.30	SI02U201000AH0H4_K01
2.200	H5	505	1111.00	27.50	2.50	SI02U201000AH0H5_K01
2.500	H4	750	1875.00	24.50	3.10	SI02U501000AH0H4_K01
3.000	H5,C2	450	1350.00	24.50	3.70	SI000031000AH0H6_K01
3.000	H6	505	1515.00	32.00	2.10	SI000031000AH_K01
3.300	H5,C2	450	1485.00	25.50	3.50	SI03U301000AH_K01
3.300	H6,C2	505	1666.50	32.50	2.00	SI03U301000AH_K01
4.000	H6,C2	450	1800.00	29.50	3.10	SI000041000AH_K01

Custom-designed capacitors are available on request

Refer to "Capacitor Drawing" on page 7 to 11



## IGBT SNUBBER CAPACITORS - DIRECT MOUNTING

**MP-4**

### Standard Capacitor Values

Working Voltage 3000 VDC (750 VAC)

Rated Capacitance MFD	Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & 70°C Amps	Typical ESR at 100KHz mΩ	Ordering Code*
0.047	B1	2515	118.20	7.00	16.50	SI0U0473000AH0B1_ _ _ K01
0.047	H7	2515	118.20	7.50	16.50	SI0U0473000AH0H7_ _ _ K01
0.068	B1	2515	171.02	8.00	11.50	SI0U0683000AH0B1_ _ _ K01
0.068	H7	2515	171.02	9.00	11.50	SI0U0683000AH0H7_ _ _ K01
0.100	H1	2515	251.50	12.50	8.50	SI0U103000AH0H1_ _ _ K01
0.150	H1	2515	377.25	15.00	6.00	SI0U153000AH0H1_ _ _ K01
0.220	H1	2050	451.00	14.50	8.20	SI0U223000AH0H1_ _ _ K01
0.220	H4	2515	553.30	19.00	4.30	SI0U223000AH0H4_ _ _ K01
0.330	H1	2050	676.50	16.50	6.10	SI0U333000AH0H1_ _ _ K01
0.330	H5	1400	462.00	21.00	4.30	SI0U333000AH0H5_ _ _ K01
0.470	H4	2050	963.50	19.50	5.00	SI0U473000AH0H4_ _ _ K01
0.470	H6	1410	662.70	24.00	3.80	SI0U473000AH0H6_ _ _ K01
0.680	H6,C2	1150	782.00	22.00	5.20	SI0U683000AH_ _ _ K01
0.820	H6,C2	1150	943.00	24.00	4.70	SI0U6823000AH_ _ _ K01


Custom-designed capacitors are available on request

Refer to "Capacitor Drawing" on page 7 to 11


## IGBT SNUBBER CAPACITORS - DIRECT MOUNTING

**MP-4**


### Capacitor Drawings and Terminal Styles

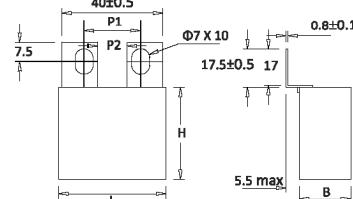


Terminal style : BBL  
Case code : H1,H4,H7,H5,C2,H6,E3

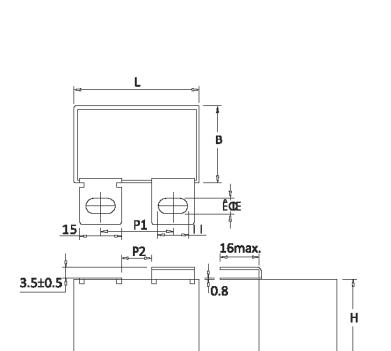

Terminal style : SL  
Case code : B1,H1,H4,H5,H6,H7,C2,E3

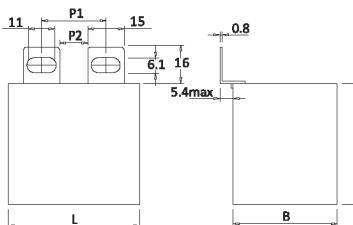





Terminal style : TL  
Case code : B1,H1,H4,H5,H6,H7,C2,E3

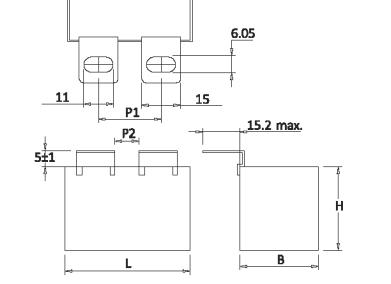

Terminal style : RL  
Case code : B1,H1,H4,H5,H6,H7,C2,E3





Dimensions in mm  
For details see Case Code table on page 12 & 13

### Capacitor Drawings and Terminal Styles

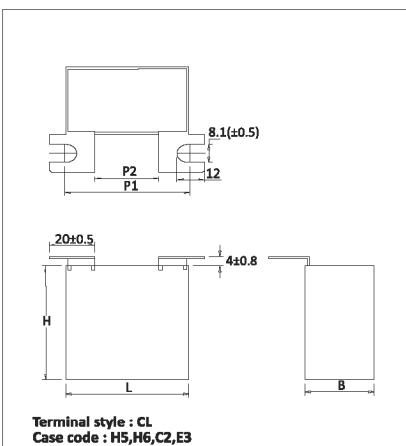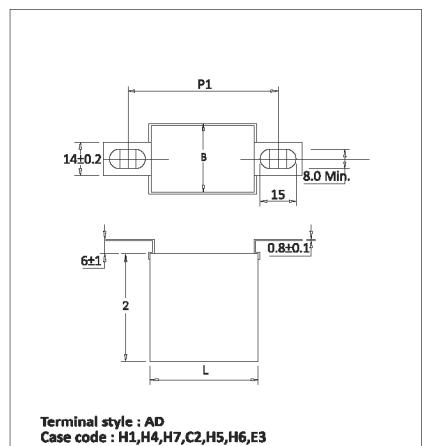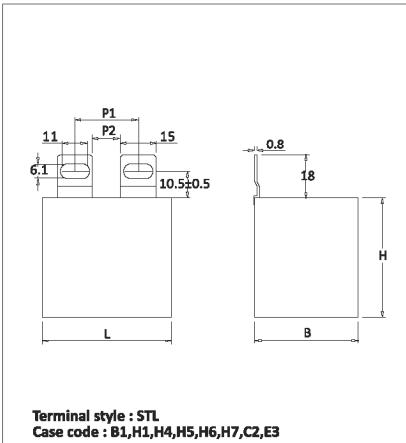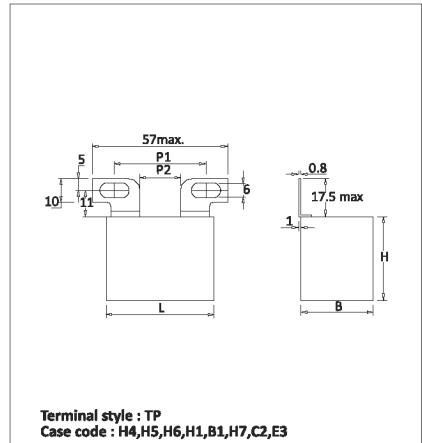





**Dimensions in mm**  
For details see Case Code table on page 12 & 13

### Capacitor Drawings and Terminal Styles

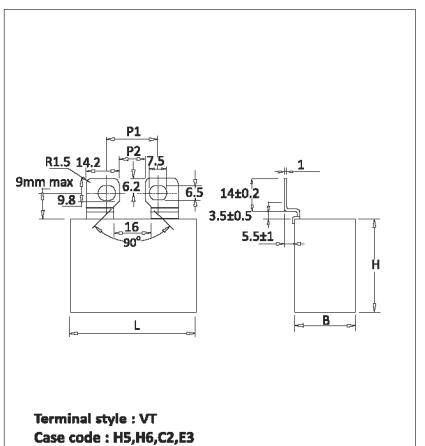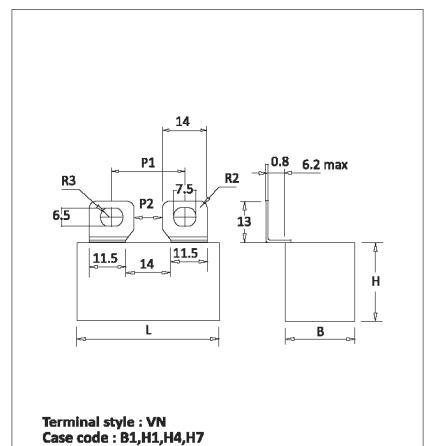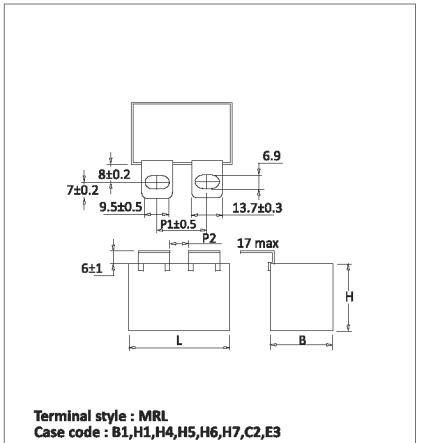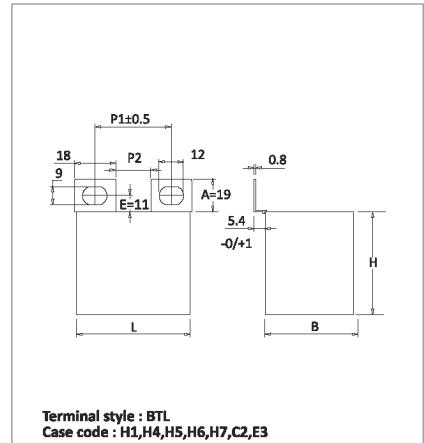

**Dimensions in mm**  
For details see Case Code table on page 12 & 13


### Capacitor Drawings and Terminal Styles

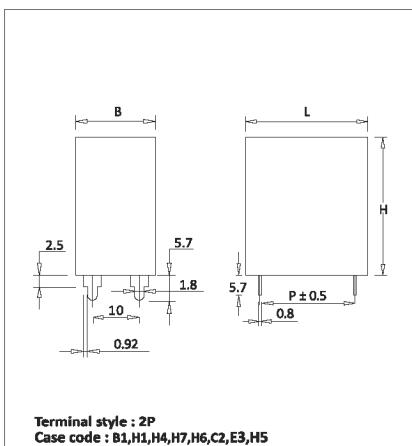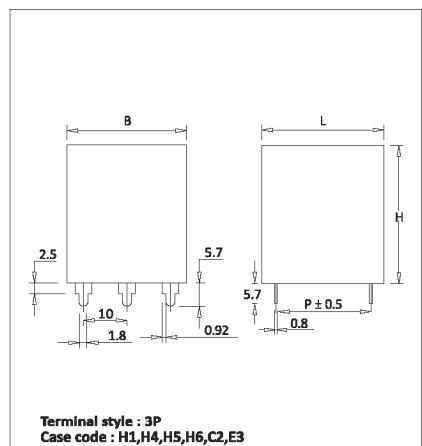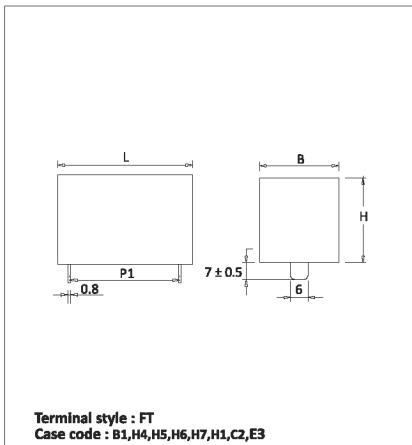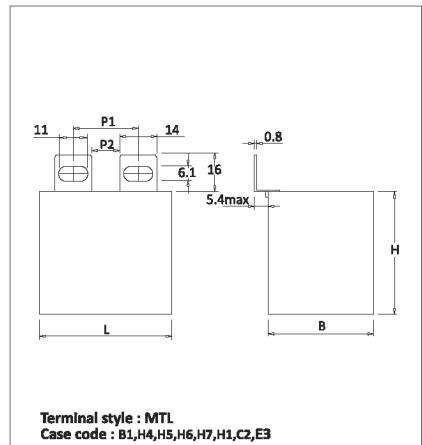

### Dimensions in mm

For details see Case Code table on page 12 & 13

### Capacitor Drawings and Terminal Styles

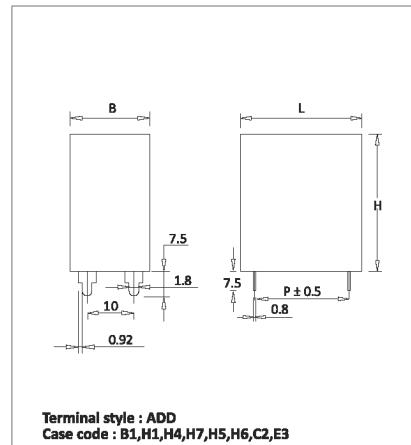

### Dimensions in mm

For details see Case Code table on page 12 & 13

**Table of Case Codes and Dimensions**

Case code	Dimensions in mm*			P1	P2	Terminal Styles
	B	H	L			
B1	17.00	29.00	41.50	37.50	-	FT,2P,ADD
B1	17.00	29.00	41.50	23.50	8.50	TL,RL,STL,SL
B1	17.00	29.00	41.50	38.50	17.00	TP
B1	17.00	29.00	41.50	24.50	10.50	MTL
B1	17.00	29.00	41.50	23.00	9.00	VN
B1	17.00	29.00	41.50	25.00	11.00	MRL
H1	33.50	35.50	42.50	37.50	-	FT,2P,3P,ADD
H1	33.50	35.50	42.50	23.50	8.50	TL,RL,STL,SL
H1	33.50	35.50	42.50	38.50	17.00	TP
H1	33.50	35.50	42.50	24.50	10.50	MTL
H1	33.50	35.50	42.50	57.50	-	AD
H1	33.50	35.50	42.50	25.00	7.00	BTL
H1	33.50	35.50	42.50	23.00	9.00	VN
H1	33.50	35.50	42.50	22.00	11.50	BBL
H1	33.50	35.50	42.50	25.00	11.00	MRL
H4	33.00	45.00	42.50	37.50	-	FT,3P,2P,ADD
H4	33.00	45.00	42.50	23.50	8.50	TL,RL,STL,SL
H4	33.00	45.00	42.50	38.50	17.00	TP
H4	33.00	45.00	42.50	24.50	10.50	MTL
H4	33.00	45.00	42.50	57.50	-	AD
H4	33.00	45.00	42.50	25.00	7.00	BTL
H4	33.00	45.00	42.50	23.00	9.00	VN
H4	33.00	45.00	42.50	22.00	11.50	BBL
H4	33.00	45.00	42.50	25.00	11.00	MRL
H5	30.00	45.00	57.50	48.50	-	FT,2P,3P,ADD
H5	30.00	45.00	57.50	26.50	11.50	TL,RL,STL,SL
H5	30.00	45.00	57.50	27.00	13.00	MTL
H5	30.00	45.00	57.50	37.00	19.00	BTL
H5	30.00	45.00	57.50	22.00	11.10	VT
H5	30.00	45.00	57.50	55.00	28.00	CL
H5	30.00	45.00	57.50	38.00	24.00	MRL
H5	30.00	45.00	57.50	22.00	11.50	BBL
H5	30.00	45.00	57.50	38.50	17.00	TP
H5	30.00	45.00	57.50	65-78	-	AD
H6	35.00	50.00	57.50	48.50	-	FT,2P,3P,ADD
H6	35.00	50.00	57.50	26.50	11.50	TL,RL,STL,SL
H6	35.00	50.00	57.50	27.00	13.00	MTL
H6	35.00	50.00	57.50	37.00	19.00	BTL
H6	35.00	50.00	57.50	22.00	11.10	VT
H6	35.00	50.00	57.50	55.00	28.00	CL
H6	35.00	50.00	57.50	38.00	24.00	MRL
H6	35.00	50.00	57.50	22.00	11.50	BBL
H6	35.00	50.00	57.50	38.50	17.00	TP
H6	35.00	50.00	57.50	65-78	-	AD
H7	24.50	27.50	42.50	37.50	-	FT,2P,ADD
H7	24.50	27.50	42.50	38.50	17.00	TP
H7	24.50	27.50	42.50	23.50	8.50	TL,RL,STL,SL
H7	24.50	27.50	42.50	24.50	10.50	MTL
H7	24.50	27.50	42.50	57.50	-	AD
H7	24.50	27.50	42.50	25.00	7.00	BTL
H7	24.50	27.50	42.50	23.00	9.00	VN
H7	24.50	27.50	42.50	22.00	11.50	BBL
H7	24.50	27.50	42.50	25.00	11.00	MRL

\* Refer to "Capacitor Drawing" on page 7 to 11

**Table of Case Codes and Dimensions**

Case code	Dimensions in mm*			P1	P2	Terminal Styles
	B	H	L			
C2	43.00	50.00	54.00	48.50	-	FT,2P,3P,ADD
C2	43.00	50.00	54.00	26.50	11.50	TL,RL,STL,SL
C2	43.00	50.00	54.00	27.00	13.00	MTL
C2	43.00	50.00	54.00	68.50	-	AD
C2	43.00	50.00	54.00	37.00	19.00	BTL
C2	43.00	50.00	54.00	55.00	28.00	CL
C2	43.00	50.00	54.00	22.00	11.10	VT
C2	43.00	50.00	54.00	25.00	11.00	MRL
C2	43.00	50.00	54.00	22.00	11.50	BBL
C2	43.00	50.00	54.00	38.50	17.00	TP
E3	35.00	46.00	54.00	48.50	-	FT,2P,3P,ADD
E3	35.00	46.00	54.00	26.50	11.50	TL,RL,STL,SL
E3	35.00	46.00	54.00	27.00	13.00	MTL
E3	35.00	46.00	54.00	68.50	-	AD
E3	35.00	46.00	54.00	37.00	19.00	BTL
E3	35.00	46.00	54.00	55.00	28.00	CL
E3	35.00	46.00	54.00	22.00	11.10	VT
E3	35.00	46.00	54.00	25.00	11.00	MRL
E3	35.00	46.00	54.00	22.00	11.50	BBL
E3	35.00	46.00	54.00	38.50	17.00	TP

\* Refer to "Capacitor Drawing" on page 7 to 11

**Precaution**

1. These capacitors are not suitable for 'across the line' applications
2. VAC(rated) : Frequency should be less than 1000Hz
3. VDC(rated) : 1.4 x Vrms + VDC should be less than rated VDC
4. MAX ESR = Typical ESR +30%




### Highlights

- Self-healing property
- High DV / DT
- Low ESR
- Low loss polypropylene dielectric
- Reference standard-IEC 61071
- Flame retardant UL94 - V0, ROHS compliant

### Construction






Extended foil electrodes with metallised polypropylene dielectric internal series connection

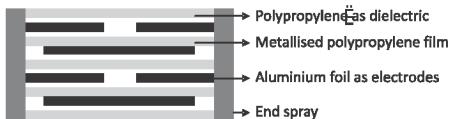

### Applications

These capacitors are used in high voltage, high current and high pulse applications such as:

- IGBT protection circuits
- Snubber networks
- Energy conversion and control in power electronics
- Protection circuits in SMPS

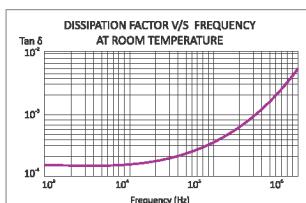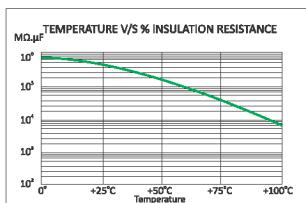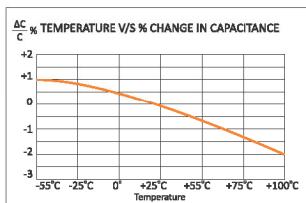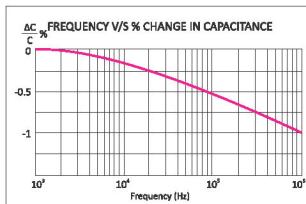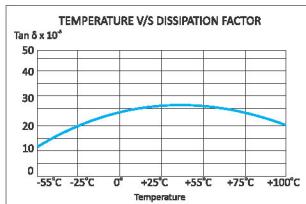

### Technical Specifications

#### Physical Characteristics

- Dielectric material
- Electrode material
- Winding construction
- Enclosure

Polypropylene film.  
Aluminum foil and metallised polypropylene film  
Extended foil electrodes with metallised polypropylene dielectric internal series connection  
Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

- Capacitance range
  - Capacity tolerance
  - Rated voltage VDC
  - Rated voltage VAC
  - Test voltage between terminals
  - Test voltage terminal to case
  - Dissipation factor (Tan d)
  - Temperature range
  - Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute
- |                                       |                                 |
|---------------------------------------|---------------------------------|
| 0.1 MFD to 3.3 MFD                    | $\pm 5\%(J), \pm 10\%(K)$       |
| 1000, 1250, 1500, 2000                | 1000, 1250, 1500, 2000          |
| 480, 550, 630, 700                    | 480, 550, 630, 700              |
| 1.6 x rated voltage VDC for 2 seconds | 3KVAC at 50Hz for 60 seconds    |
| $\leq 0.0005$ at 1 KHz and 25°C       | $\leq 0.0005$ at 1 KHz and 25°C |
| -40°C to +85°C                        | -40°C to +85°C                  |
| $C \leq 0.33$ MFD                     | $\geq 100,000M\Omega$           |
| $C > 0.33$ MFD                        | $\geq 30,000M\Omega$            |





#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company's symbol followed by the words ALCON
- The capacitor grade viz KPF
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors







#### Capacitor Drawings and Terminal Styles

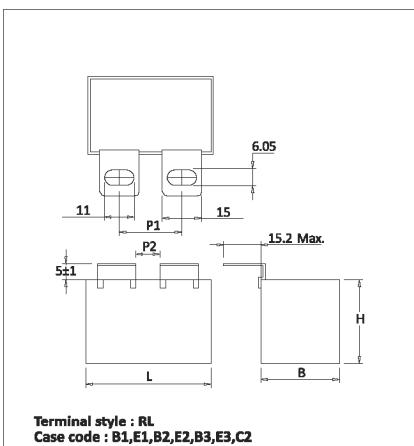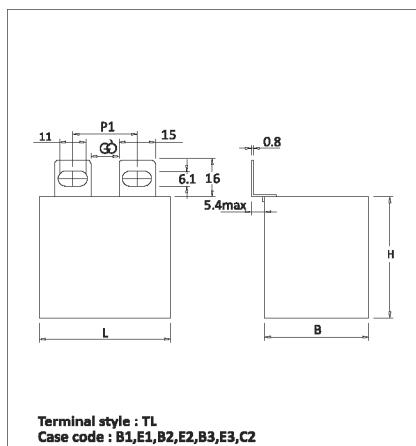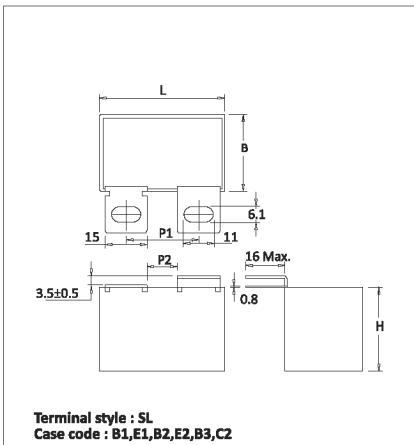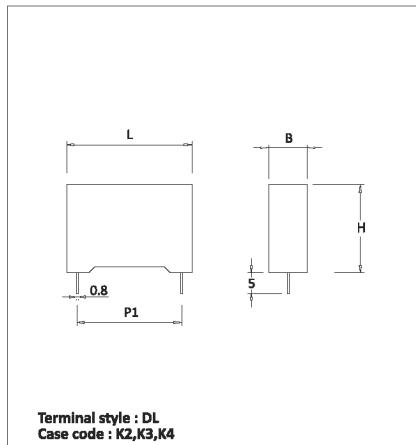





**Dimensions in mm**  
For details see Case Code table on page 24 & 25

#### Capacitor Drawings and Terminal Styles

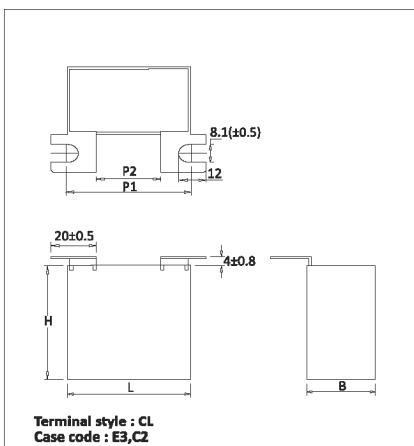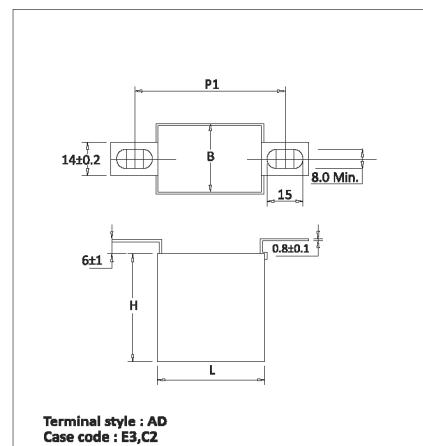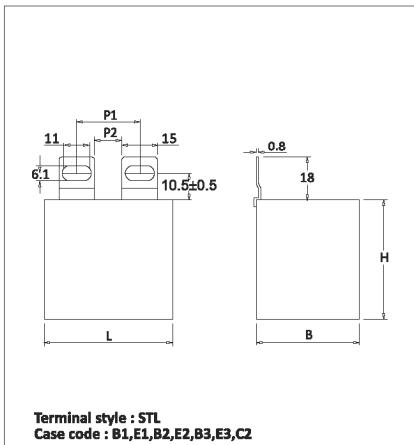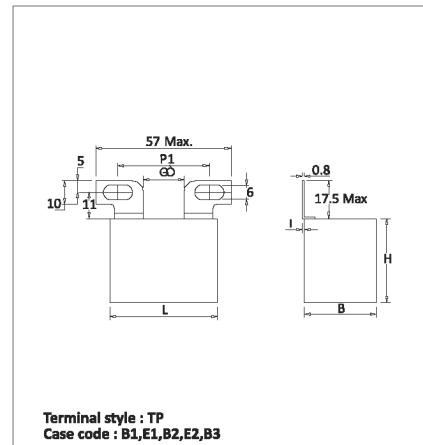





**Dimensions in mm**  
For details see Case Code table on page 24 & 25

### Capacitor Drawings and Terminal Styles

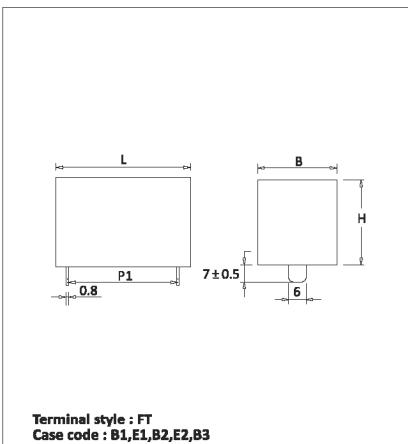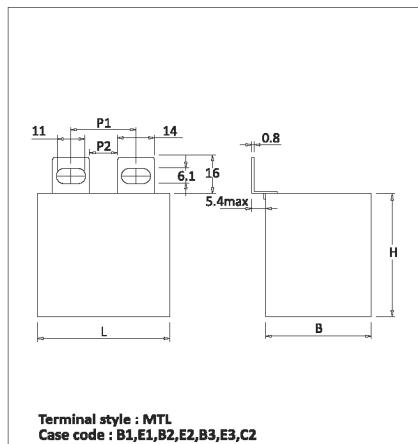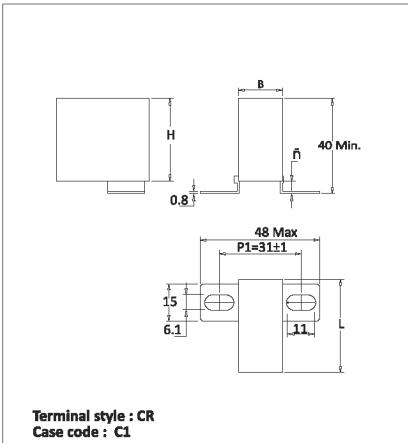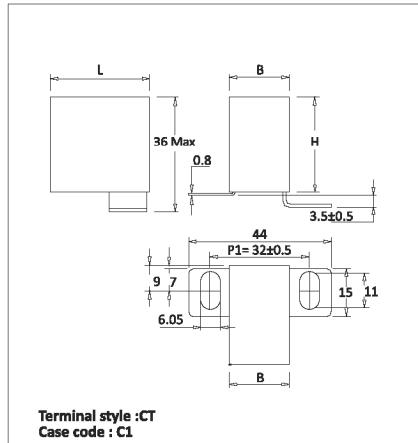





**Dimensions In mm**  
For details see Case Code table on page 24 & 25

### Capacitor Drawings and Terminal Styles

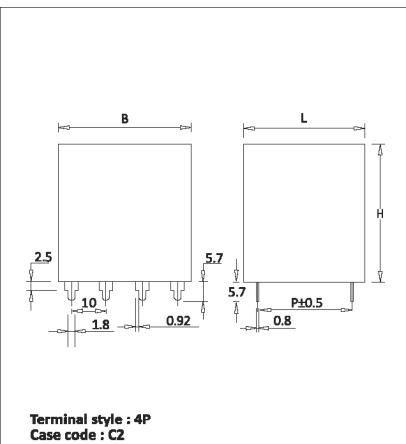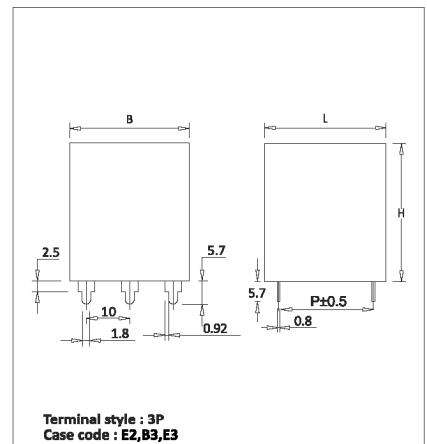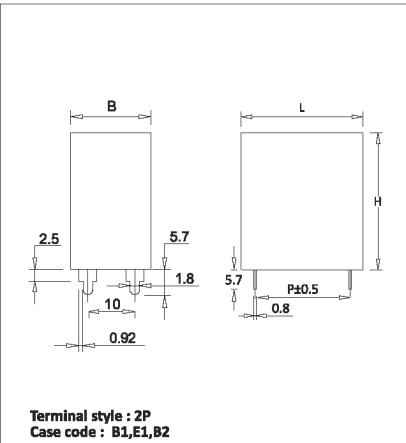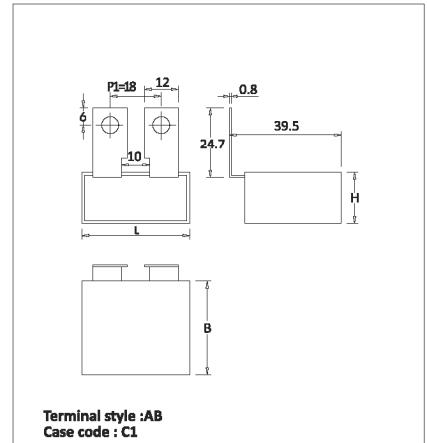

**Dimensions In mm**  
For details see Case Code table on page 24 & 25


### Capacitor Drawings and Terminal Styles

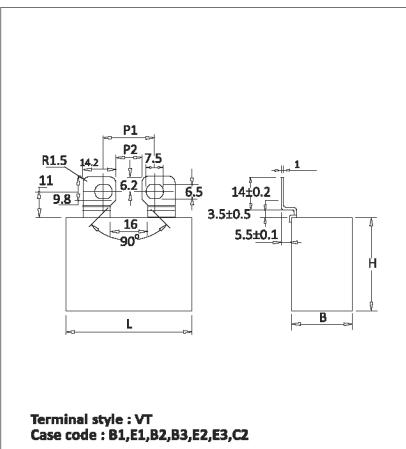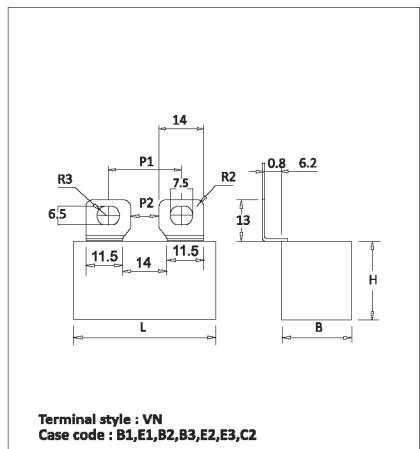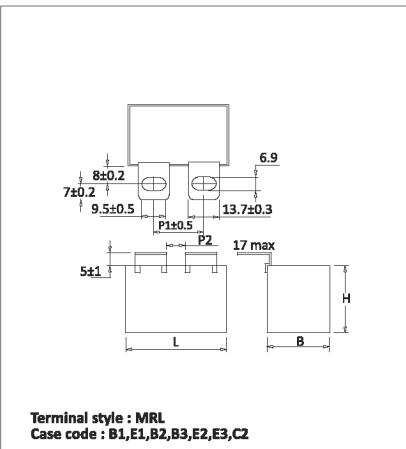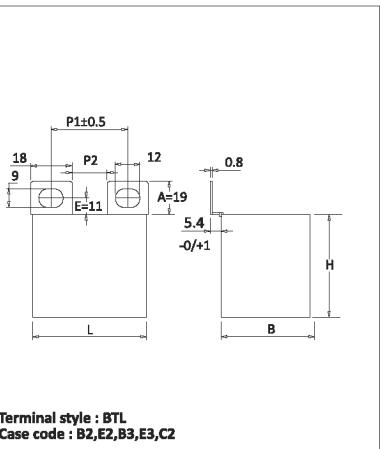

**Dimensions in mm**

For details see Case Code table on page 24 & 25

### Capacitor Drawings and Terminal Styles

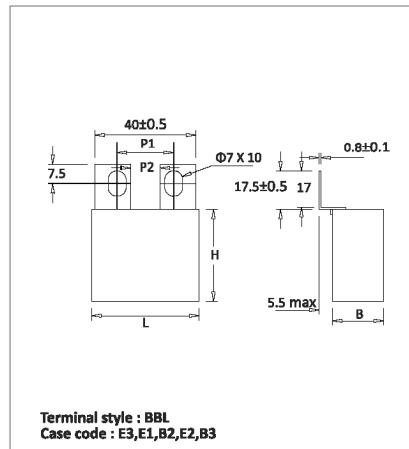

**Dimensions in mm**

For details see Case Code table on page 24 & 25

**Table of Case Codes and Dimensions**

Case Code	Dimensions in mm*			P1	P2	Terminal Styles
	B±1	H±1	L±1	P±0.5		
K2	11.0	20.0	32.0	27.5	—	DL
K3	13.0	22.0	32.0	27.5	—	DL
K4	14.0	24.0	32.0	27.5	—	DL
B1	17.0	29.0	41.5	37.5	—	FT,2P
B1	17.0	29.0	41.5	23.5	8.5	TL,RL,STL,SL
B1	17.0	29.0	41.5	22.0	8.5	MRL
B1	17.0	29.0	41.5	38.5	17.0	TP
B1	17.0	29.0	41.5	24.5	10.5	MTL
B1	17.0	29.0	41.5	23.0	9.0	VN
E1	20.0	36.0	42.0	37.5	—	FT,2P
E1	20.0	36.0	42.0	23.5	8.5	TL,RL,STL,SL
E1	20.0	36.0	42.0	22.0	8.5	MRL
E1	20.0	36.0	42.0	38.5	17.0	TP
E1	20.0	36.0	42.0	24.5	10.5	MTL
E1	20.0	36.0	42.0	22.0	11.5	BBL
E1	20.0	36.0	42.0	22.0	11.1	VT
E1	20.0	36.0	42.0	23.0	9.0	VN
B2	24.0	38.0	45.0	37.5	—	FT,2P
B2	24.0	38.0	45.0	23.5	8.5	TL,RL,STL,SL
B2	24.0	38.0	45.0	22.2	8.5	MRL
B2	24.0	38.0	45.0	38.5	17.0	TP
B2	24.0	38.0	45.0	24.5	10.5	MTL
B2	24.0	38.0	45.0	23.0	9.0	VN
B2	24.0	38.0	45.0	22.0	11.1	VT
B2	24.0	38.0	45.0	25.0	7.0	BTL
B2	24.0	38.0	45.0	22.0	11.5	BBL
E2	35.0	42.0	45.0	37.5	—	FT,3P
E2	35.0	42.0	45.0	27.0	11.5	TL,RL,STL,SL
E2	35.0	42.0	45.0	25.0	11.5	MRL
E2	35.0	42.0	45.0	38.5	17.0	TP
E2	35.0	42.0	45.0	27.0	13.0	MTL
E2	35.0	42.0	45.0	25.0	7.0	BTL
E2	35.0	42.0	45.0	22.0	11.1	VT
E2	35.0	42.0	45.0	23.0	9.0	VN
E2	35.0	42.0	45.0	22.0	11.5	BBL
B3	30.0	45.0	45.0	37.5	—	FT,3P
B3	30.0	45.0	45.0	26.50	11.5	TL,RL,STL,SL,VT,VN
B3	30.0	45.0	45.0	25.0	11.5	MRL
B3	30.0	45.0	45.0	38.5	17.0	TP
B3	30.0	45.0	45.0	27.0	13.0	MTL
B3	30.0	45.0	45.0	25.0	7.0	BTL
B3	30.0	45.0	45.0	22.0	11.5	BBL
E3	35.0	46.0	54.0	48.5	—	3P
E3	35.0	46.0	54.0	26.50	11.5	TL,RL,STL,SL
E3	35.0	46.0	54.0	25.00	11.5	MRL
E3	35.0	46.0	54.0	27.0	13.0	MTL
E3	35.0	46.0	54.0	68.5	—	AD
E3	35.0	46.0	54.0	55.0	28.0	CL
E3	35.0	46.0	54.0	37.0	19.0	BTL
E3	35.0	46.0	54.0	22.0	11.1	VT
E3	35.0	46.0	54.0	23.0	9.0	VN
E3	35.0	46.0	54.0	22.0	11.5	BBL
C2	43.0	50.0	54.0	37.0	19.0	BTL
C2	43.0	50.0	54.0	48.5	—	4P

\* Refer to "Capacitor Drawing" on page 18 to 23

**Table of Case Codes and Dimensions**

Case Code	Dimensions in mm*			P1	P2	Terminal Styles
	B±1	H±1	L±1	P±0.5		
C2	43.0	50.0	54.0	26.50	11.5	TL,RL,STL,SL,BTL
C2	43.0	50.0	54.0	25.0	11.5	MRL
C2	43.0	50.0	54.0	27.0	13.0	MTL
C2	43.0	50.0	54.0	68.5	—	AD
C2	43.0	50.0	54.0	55.0	28.0	CL
C2	43.0	50.0	54.0	22.0	11.1	VT
C2	43.0	50.0	54.0	23.0	9.0	VN
C1	18.0	33.0	38.0	32.0	—	CT
C1	18.0	33.0	38.0	18.0	—	AB
C1	18.0	33.0	38.0	31.0	—	CR

\* Refer to "Capacitor Drawing" on page 18 to 23

**Precaution**

1. These capacitors are not suitable for 'across the line' applications
2. VAC(rated) : Frequency should be less than 1000Hz
3. VDC(rated) : 1.4 x Vrms + VDC should be less than rated VDC
4. MAX ESR = Typical ESR +30%

## IGBT SNUBBER CAPACITORS - DIRECT MOUNTING

KP-3C




### Highlights

- High DV/DT
- Low ESR
- Low loss polypropylene dielectric
- Impregnated elements eliminate corona
- Flame retardant UL94 - VO, ROHS compliant

### Construction






Extended foil electrodes and polypropylene film dielectric impregnated

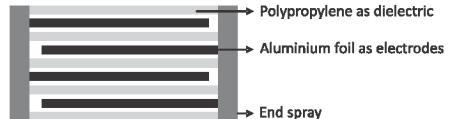

### Applications

These capacitors are used in high voltage, high current and high pulse applications such as:

- IGBT protection circuits
- Snubber networks
- Low frequency tuning circuits

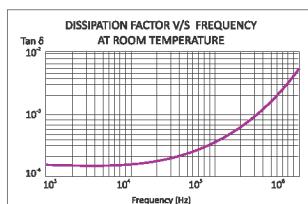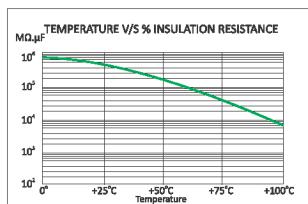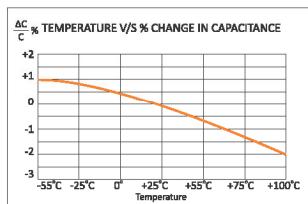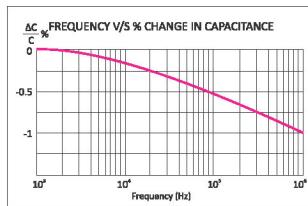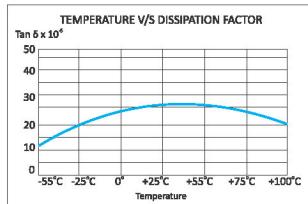

## IGBT SNUBBER CAPACITORS - DIRECT MOUNTING

KP-3C

### Technical Specifications

#### Physical Characteristics

- Dielectric material
- Electrode material
- Winding construction
- Enclosure

Polypropylene film.  
Aluminium foil  
Extended foil electrodes and polypropylene film dielectric impregnated  
Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

- Capacitance range
  - Capacity tolerance
  - Rated voltage VDC
  - Rated voltage VAC
  - Test voltage between terminals
  - Test voltage terminal to case
  - Dissipation factor (Tan d)
  - Temperature range
  - Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute
- |                              |                                       |
|------------------------------|---------------------------------------|
| 0.1 MFD to 3.0 MFD           | ±5%(J), ±10%(K)                       |
| 1000, 1250, 1500, 2000       | 1000, 1250, 1500, 2000                |
| 480, 550, 630, 750           | 2.5x rated voltage VDC for 10 seconds |
| 3KVAC at 50Hz for 60 seconds | 3KVAC at 50Hz for 60 seconds          |
| ≤0.0005 at 1 KHz and 25°C    | ≤0.0005 at 1 KHz and 25°C             |
| -40°C to +85°C               | -40°C to +85°C                        |
| C ≤ 0.33 MFD                 | ≥100,000MΩ                            |
| C > 0.33 MFD                 | ≥30,000MΩ                             |

#### Marking on Capacitors





Each capacitor will have the following information printed on it, sequentially:

- The Company's symbol followed by the words ALCON
- The capacitor grade viz KP-3C
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors



KP-3C





### Capacitor Drawings and Terminal Styles

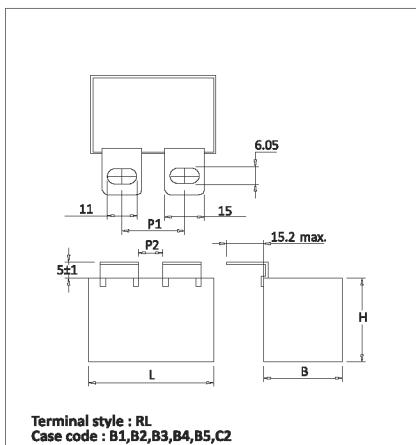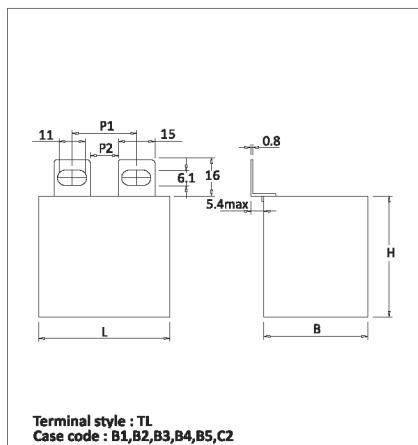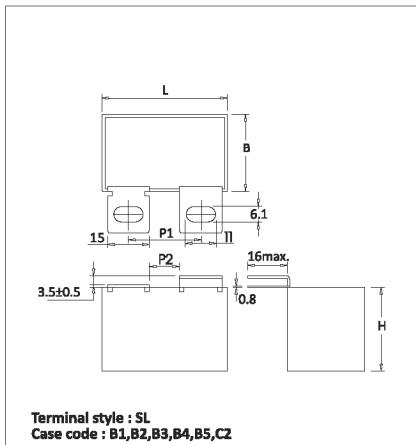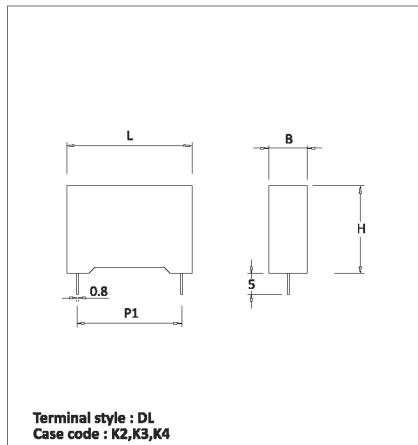

**Dimensions in mm**  
For details see Case Code table on page 34

KP-3C





### Capacitor Drawings and Terminal Styles

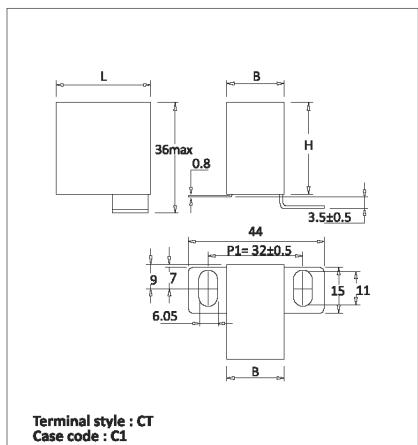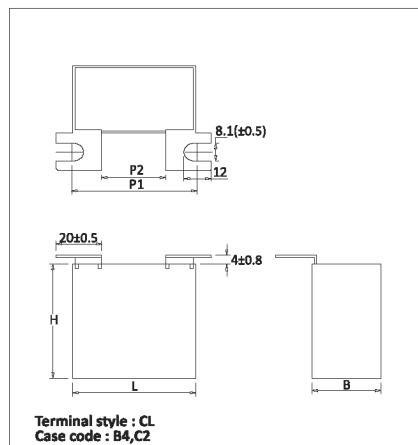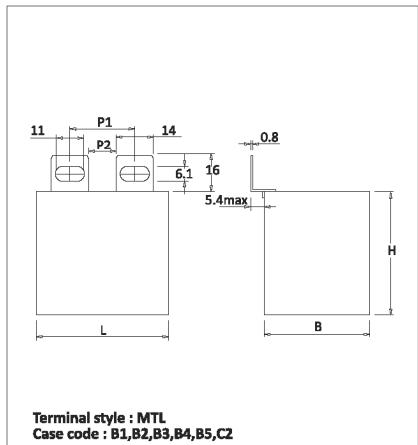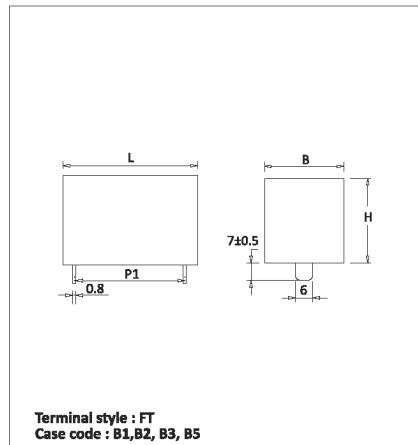

**Dimensions in mm**  
For details see Case Code table on page 34

KP-3C

## Capacitor Drawings and Terminal Styles

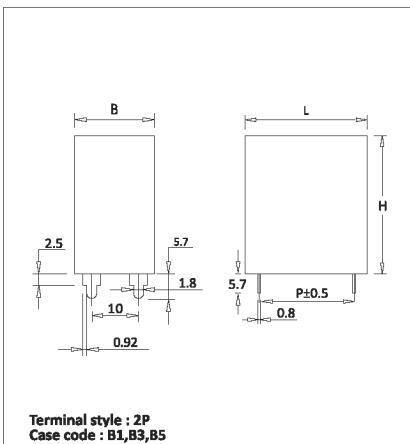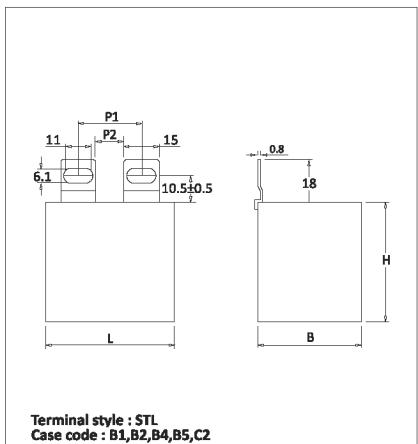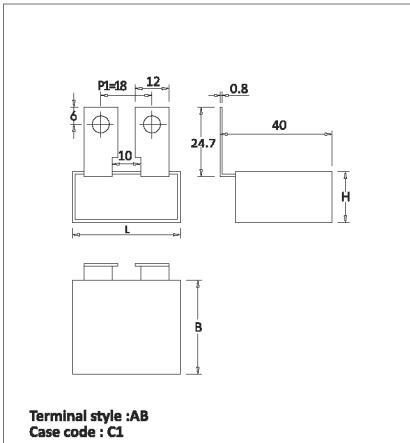
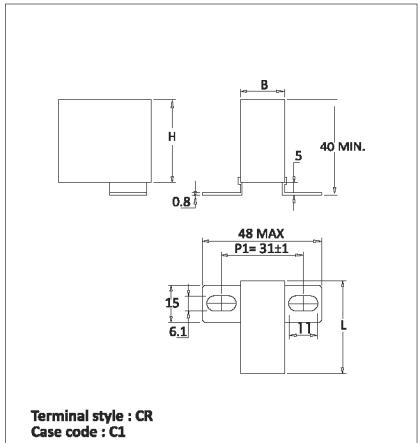


## Dimensions in mm

For details see Case Code table on page 34

KP-3C

## Capacitor Drawings and Terminal Styles

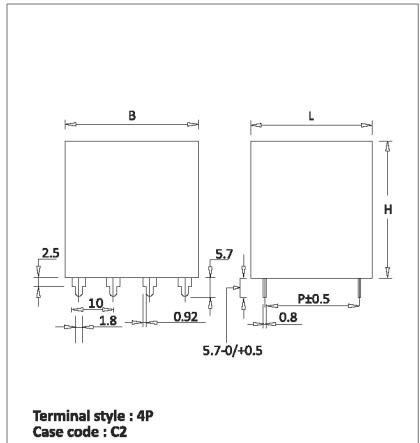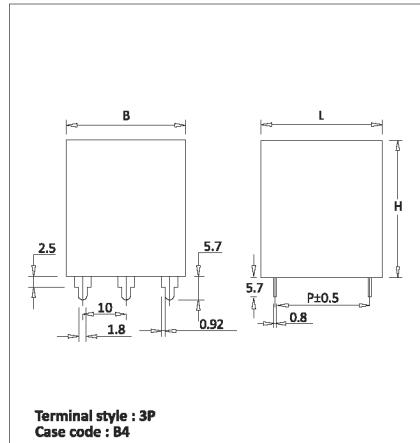

## Dimensions in mm

For details see Case Code table on page 34




### Table of Case Codes and Dimensions

Case Code	Dimensions in mm*			P1	P2	Terminal Styles
	B±1	H±1	L±1		P±0.5	
K2	11	20	32.0	27.5	—	DL
K3	13	22	32.0	27.5	—	DL
K4	14	24	32.0	27.5	—	DL
B1	17	29	41.5	32.5	—	DL,FT,2P
B1	17	29	41.5	39.0	—	DL,FT,2P
B1	17	29	41.5	23.5	8.5	TL,RL,STL,SL
B1	17	29	41.5	24.5	10.5	MTL
B2	24	38	45.0	23.5	8.5	TL,RL,STL,SL
B2	24	38	45.0	24.5	10.5	MTL
B3	30	45	45.0	39.0	—	FT,2P
B3	30	45	45.0	27.0	13.0	MTL
B3	30	45	45.0	26.5	11.5	TL,RL,STL,SL
B4	30	50	54.0	27.0	11.5	TL,RL,STL,SL
B4	30	50	54.0	48.0	—	3P
B4	30	50	54.0	55.0	28.0	CL
B4	30	50	54.0	27.0	13.0	MTL
B5	28	30	45.0	27.0	11.5	TL,RL,STL,SL
B5	28	30	45.0	27.0	13.0	MTL
B5	28	30	45.0	39.0	—	FT,2P
C1	18	33	38.0	33.0	—	CR
C1	18	33	38.0	31.0	—	CT
C1	18	33	38.0	18.0	—	AB
C2	43	50	54.0	26.5	11.5	TL,RL,STL,SL
C2	43	50	54.0	27.0	13.0	MTL
C2	43	50	54.0	55.0	28.0	CL
C2	43	50	54.0	48.5	—	4P

\* Refer to "Capacitor Drawings" on page 30 to 33

### Precaution

- These capacitors are not suitable for 'across the line' applications
- VAC(rated): Frequency should be less than 1000Hz
- VDC(rated): 1.4 x Vrms + VDC should be less than rated VDC

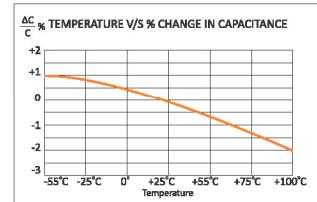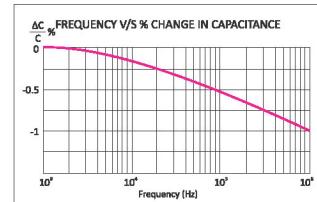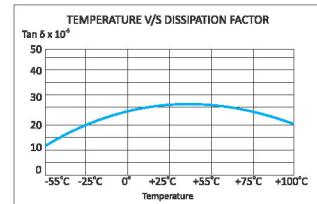


### Highlights

- Self-healing property
- High DV / DT
- Low ESR
- Low loss polypropylene dielectric
- Reference standard-IEC 61071
- Flame retardant UL94 - V0, ROHS compliant

### Construction



Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection

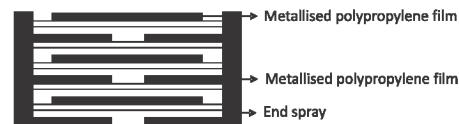

### Applications

These capacitors are used in high voltage, high current and high pulse applications such as:

- IGBT protection circuits
- Snubber networks
- Energy conversion and control in power electronics
- Protection circuits in SMPS

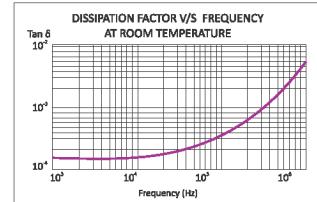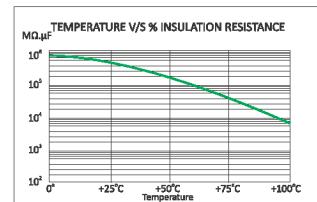

### Technical Specifications

#### Physical Characteristics

- Dielectric material Polypropylene film.
- Electrode material Metallized polypropylene film.
- Winding construction Metallised polypropylene dielectric internal series connection
- Enclosure Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

- Capacitance range 0.1 MFD to 2.0 MFD
  - Capacity tolerance  $\pm 5\%$ (J),  $\pm 10\%$ (K)
  - Rated voltage VDC 600, 700, 1000, 1200, 1500, 2000, 2500
  - Test voltage between terminals 1.5 x rated voltage VDC for 2 seconds
  - Test voltage terminal to case 3KVAC at 50Hz for 60 seconds
  - Dissipation factor (Tan d)  $\leq 0.0005$  at 1 KHz and 25°C
  - Temperature range  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$
  - Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute
- C  $\leq 0.33$  MFD       $\geq 100,000\text{M}\Omega$   
 C  $> 0.33$  MFD       $\geq 30,000\text{M}\Omega$

#### Marking on Capacitors


Each capacitor will have the following information printed on it, sequentially:

- The Company's symbol followed by the words ALCON
- The capacitor grade viz MKRS
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors

### Standard Capacitor Values

Rated Capacitance MFD	Rated DC Voltage	Rated AC Voltage	Case Code	Case Size			DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & 70°C Amps	Typical ESR at 100KHz mΩ	Ordering Code*
				B	H	L					
0.1 +0.1	2500	700	H11	20	40	80	828	83	14	10.0	SI00U202500MKH113PL_01
0.15+0.15	2500	700	H11	20	40	80	828	124	15	7.2	SI00U302500MKH113PL_01
0.22 + 0.22	2000	600	H11	20	40	80	828	182	16	5.1	SI00U442000MKH113PL_01
0.33 + 0.33	2000	600	H11	20	40	80	828	273	17	4.1	SI00U662000MKH113PL_01
0.47+0.47	1500	500	H11	20	40	80	828	389	18	3.7	SI00U941500MKH113PL_01
0.68 + 0.68	1200	400	H11	20	40	80	828	563	19	3.3	SI01U361200MKH113PL_01
0.82 + 0.82	1200	400	H11	20	40	80	828	679	19	3.1	SI01U641200MKH113PL_01
1.0 + 1.0	1000	350	H11	20	40	80	828	828	20	3.0	SI000021000MKH113PL_01
1.2 + 1.2	1000	350	H11	20	40	80	828	994	20	2.8	SI02U401000MKH113PL_01
1.5 + 1.5	700	250	H11	20	40	80	828	1242	21	2.7	SI000030700MKH113PL_01
1.75 + 1.75	700	250	H11	20	40	80	828	1449	22	2.5	SI03U500700MKH113PL_01
2.0 + 2.0	600	200	H11	20	40	80	828	1656	24	2.4	SI000040600MKH113PL_01

### Capacitor Drawings and Terminal Styles

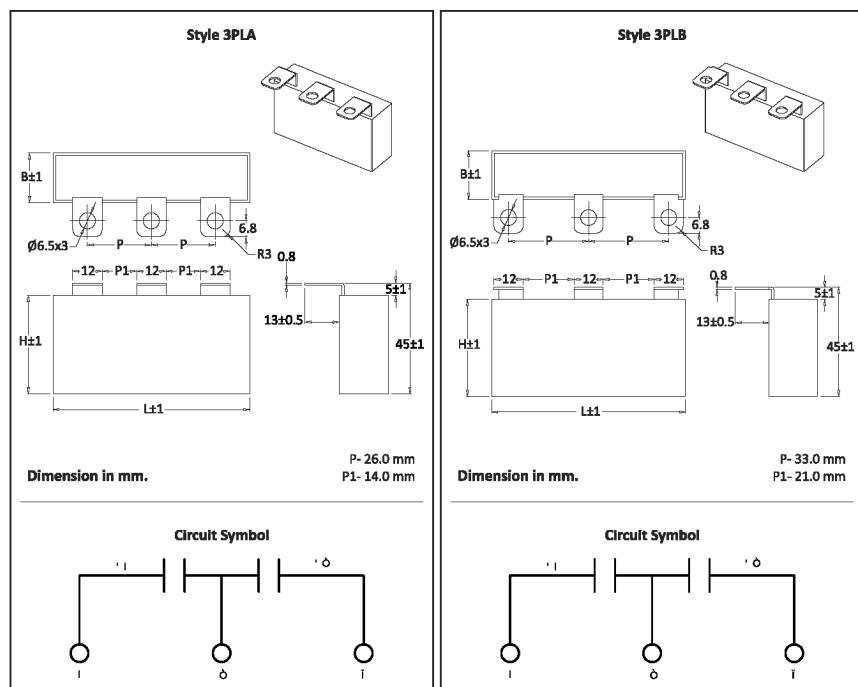

**MP-4A**




### Highlights

- Low loss polypropylene dielectric
- High frequency & high voltage capability
- High peak current
- High DV/DT
- Low ESR
- Reference standard-IEC 61071
- Flame retardant UL94 - V0, ROHS compliant

### Construction






Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection

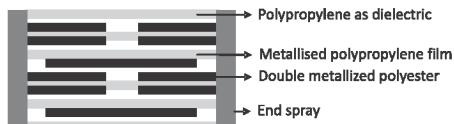

### Applications

These capacitors are used in high voltage, high current and medium to high pulse applications such as:

- Snubber circuits
- Speed control
- SMPS

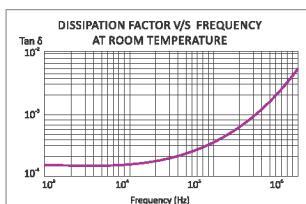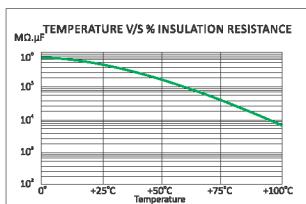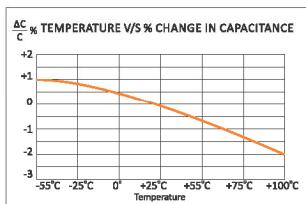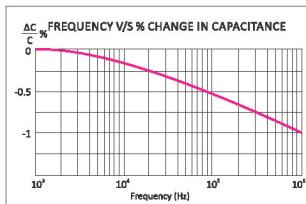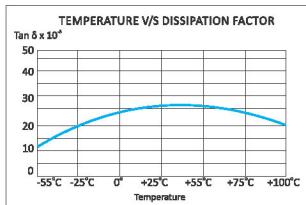

**MP-4A**

### Technical Specifications

#### Physical Characteristics

- Dielectric material
- Electrode material
- Winding construction
- Terminal
- Enclosure

Polypropylene film  
Double metallized polyester and metallized polypropylene film  
Extended double metallised polyester electrodes with metallised polypropylene dielectric internal series connection  
Tinned copper  
UL94-V0 Tape wrap with thermosetting resin end fill

#### Electrical Characteristics

- Capacitance range
- Capacity tolerance
- Rated voltage VDC
- Rated voltage VAC
- Test voltage between terminals
- Test voltage terminal to case
- Dissipation factor
- Insulation resistance
- Temperature range

0.015μF to 5μF  
±5%(J), ±10%(K)  
600, 850, 1000, 1200, 1600, 2000, 2500, 3000  
275, 450, 500, 500, 630, 630, 700, 750,  
2 x rated VDC for 10 secs.  
3 KV AC  
< 0.0005 at 1 Khz and + 25°C  
>100,000 μF at 100 VDC after 2 min  
-55°C to +105°C  
Upto + 85°C full rated voltage can be applied.  
However, at +105°C only half the rated voltage can be applied.

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company name in words ALCON
- The capacitor grade viz MP-4A
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing date code
- Design reference number on non-standard capacitors



## SNUBBER CAPACITOR WITH AXIAL LEADS

**MP-4A**

### Standard Capacitor Values

#### Working Voltage 2500 VDC (700 VAC)

Rated Capacitance MFD	Dimensions in mm *			Case Code	DV/DT V/ $\mu$ Sec	I peak Amps	Irms Max at 70°C Amps	Typical ESR at 100Khz mΩ	Ordering Code
	Tmax	Wmax	Lmax						
0.022	8.0	14.0	34.0	1.0	P0	2000	44.00	2.00	SI0U0222500AK0PO0AXLK01
0.033	10.0	16.0	34.0	1.0	P1	2000	66.00	3.50	SI0U0332500AK0P10AXLK01
0.047	11.5	17.5	34.0	1.0	BV	2000	94.00	5.00	SI0U0472500AKOBVOAXLK01
0.068	14.0	20.2	34.0	1.0	BN	2000	136.00	5.90	SI0U0682500AKOBNOAXLK01
0.100	17.0	23.5	34.0	1.0	BO	2000	200.00	6.30	SI00U12500AKOBO0AXLK01
0.150	14.0	23.5	46.0	1.0	CL	1550	232.00	7.20	SI00U152500AKOCL0AXLK01
0.220	17.5	26.5	46.0	1.0	CM	1550	341.00	8.50	SI00U222500AKOCM0AXLK01
0.330	21.5	31.0	46.0	1.2	BR	1550	511.00	10.00	SI00U332500AKOBROAXLK01
0.470	26.0	35.5	46.0	1.2	CN	1550	728.00	11.60	SI00U472500AKOCNOAXLK01
0.680	27.0	39.5	54.0	1.2	CR	900	612.00	12.90	SI00U682500AKOCR0AXLK01
1.000	33.0	46.5	54.0	1.2	CS	900	900.00	13.90	SI000012500AKOC50AXLK01

#### Working voltage 3000 VDC (750 VAC)

Rated Capacitance MFD	Dimensions in mm *			Case Code	DV/DT V/ $\mu$ Sec	I peak Amps	Irms Max at 70°C Amps	Typical ESR at 100Khz mΩ	Ordering Code
	Tmax	Wmax	Lmax						
0.022	11.5	17.5	34.0	1.0	BV	2500	55.00	2.90	SI0U0223000AKOBVOAXLK01
0.033	14.0	20.5	34.0	1.0	CT	2500	82.00	4.00	SI0U0333000AKOCT0AXLK01
0.047	11.5	20.5	46.0	1.0	CU	1450	68.00	5.70	SI0U0473000AKOCU0AXLK01
0.068	14.0	24.0	46.0	1.0	CV	1450	98.00	6.30	SI0U0683000AKOCV0AXLK01
0.100	17.0	26.5	46.0	1.2	CW	1450	145.00	7.40	SI00U13000AKOCW0AXLK01
0.150	21.5	31.0	46.0	1.2	BR	1450	217.00	8.00	SI00U153000AKOBROAXLK01
0.220	27.5	40.0	46.0	1.2	CX	1450	319.00	9.00	SI00U223000AKOCX0AXLK01
0.330	25.5	37.0	54.0	1.2	CY	1000	330.00	11.20	SI00U333000AKOCY0AXLK01
0.470	28.5	41.0	54.0	1.2	CZ	1000	470.00	12.60	SI00U473000AKOCZ0AXLK01
0.680	35.5	49.0	54.0	1.2	DA	1000	680.00	13.80	SI00U683000AKODA0AXLK01


Custom-designed capacitors are available on request

\* Refer to "Capacitor Drawing" on page 43

## SNUBBER CAPACITOR WITH AXIAL LEADS

**MP-4A**

### Capacitor Drawing and Terminal Style

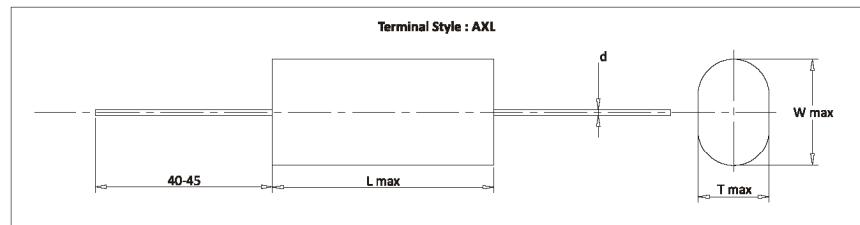

#### Precaution

1. These capacitors are not suitable for 'across the line' applications
2. VAC (rated) : Frequency should be less than 1000Hz
3. VDC(rated) : 1.4 x Vrms + VDC should be less than rated VDC
4. MAX ESR = Typical ESR +30%

## SNUBBER CAPACITOR WITH AXIAL LEADS

KPF-9




### Highlights

- Self-healing property
- High DV / DT
- Low ESR
- Low loss polypropylene dielectric
- Reference standard-IEC 61071
- Flame retardant UL94 - V0, ROHS compliant

### Construction






Extended foil electrodes with metallised polypropylene dielectric internal series connection

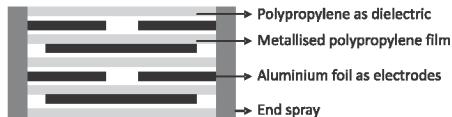

### Applications

These capacitors are used in high voltage, high current and high pulse applications such as:

- "Turn On" and "Turn Off" snubber circuits
- Energy conversion and control in power electronics
- Protection circuits in SMPS

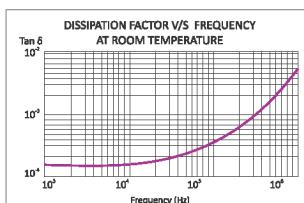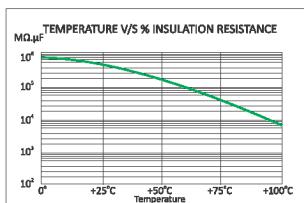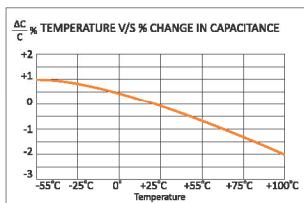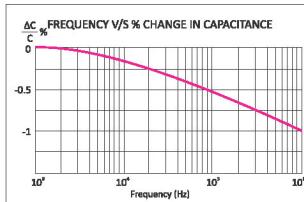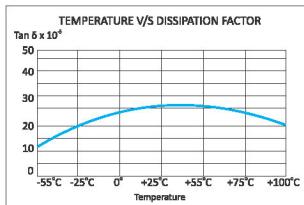

## SNUBBER CAPACITOR WITH AXIAL LEADS

KPF-9

### Technical Specifications

#### Physical Characteristics

- Dielectric material
- Electrode material
- Winding construction
- Terminal
- Enclosure

Polypropylene film.  
Aluminum foil and metallised polypropylene film  
Extended foil electrodes with metallised polypropylene dielectric internal series connection  
Tinned copper  
UL 94 V-0 polyester tape wrap with thermosetting resin end-fill

#### Electrical Characteristics

- Capacitance range 0.068 MFD to 1.5MFD
- Capacity tolerance ±5%(J), ±10%(K)
- Rated voltage VDC 850, 1000, 1200, 1600, 2000, 2500, 3000
- Rated voltage VAC 450, 500, 500, 630, 630, 750, 750, 1.6 x rated voltage VDC for 10 seconds
- Test voltage between terminals 3KVAC at 50Hz for 60 seconds
- Test voltage terminal to case ≤0.0005 at 1 KHz and 25°C
- Dissipation factor (Tan d) -40°C to +85°C
- Temperature range 40°C to +85°C
- Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute C ≤ 0.33 MFD      ≥100,000MΩ
- C > 0.33 MFD      ≥30,000MΩ

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company name in words ALCON
- The capacitor grade viz KPF-9
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing date code
- Design reference number on non-standard capacitors



## SNUBBER CAPACITOR WITH AXIAL LEADS

KPF-9

### Standard Capacitor Values


#### Working Voltage 3000 VDC (750 VAC)

Rated Capacitance MFD	Dimensions in mm*			Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & 70°C Amps	Typical ESR at 100KHz mΩ	Ordering Code
	T max	W max	L max						
0.015	8.5	15.5	34.0	1.0	BA	1500	22.00	3.00	SI0U0153000A10BA0AXLK01
0.022	9.2	16.0	34.0	1.0	PV	1500	33.00	4.20	SI0U0223000A10PV0AXLK01
0.033	11.0	17.0	34.0	1.0	BB	1500	49.00	6.10	SI0U0333000A10BB0AXLK01
0.047	12.0	19.0	46.0	1.0	BC	1200	56.00	6.80	SI0U0473000A10BC0AXLK01
0.068	14.0	21.0	46.0	1.0	BD	1200	81.00	7.90	SI0U0683000A10BD0AXLK01
0.100	15.0	24.0	46.0	1.2	PZ	1200	120.00	9.30	SI0U0103000A10PZ0AXLK01
0.150	18.0	27.0	46.0	1.2	BE	1200	180.00	12.00	SI0U0153000A10BE0AXLK01

Custom-designed capacitors are available on request

\* Refer to "Capacitor Drawing" below

### Capacitor Drawing and Terminal Style

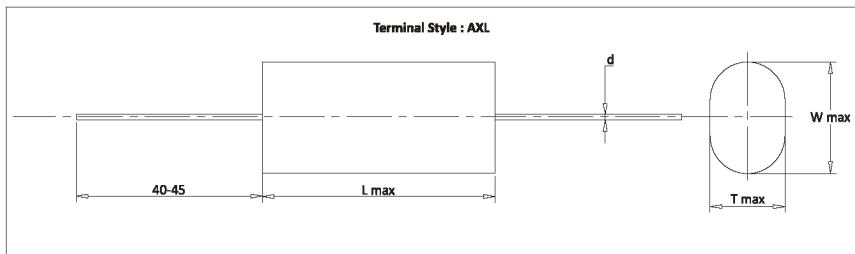






Dimensions in mm

#### Precaution

- These capacitors are not suitable for 'across the line' applications
- VAC(rated): Frequency should be less than 1000Hz
- VDC(rated):  $1.4 \times V_{rms} + VDC$  should be less than rated VDC
- MAX ESR = Typical ESR +30%

## SNUBBER CAPACITOR WITH AXIAL LEADS

KP-6

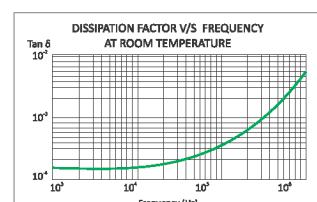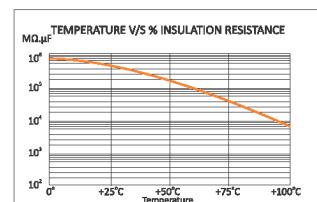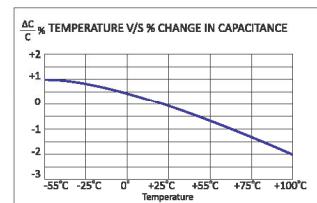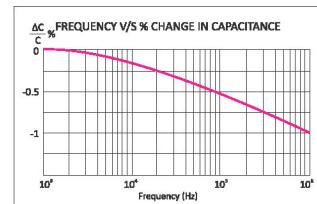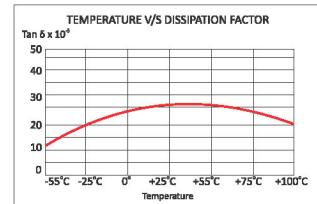


### Highlights

- High DV/DT
- Low ESR
- Low loss polypropylene dielectric
- Impregnated elements eliminate corona
- Flame retardant UL94 - VO, ROHS compliant

### Construction

Extended foil electrodes and polypropylene film dielectric impregnated

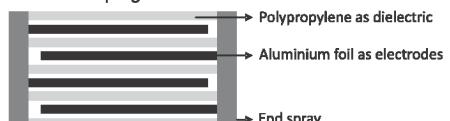

### Applications

These capacitors are used in high voltage and high current applications such as:

- Snubber networks
- Energy conversion and control in power electronics
- Noise suppressors in switching circuits

## SNUBBER CAPACITOR WITH AXIAL LEADS

KP-6

### Technical Specifications

#### Physical Characteristics

- Dielectric material Polypropylene film.
- Electrode material Aluminium foil
- Winding construction Extended foil electrodes and polypropylene film dielectric impregnated
- Terminals Tinned copper
- Enclosure Preformed UL 94 V-0 plastic case with thermosetting resin-fill

#### Electrical Characteristics

- Capacitance range 0.01 MFD to 2.0 MFD
- Capacity tolerance  $\pm 5\%$ (J),  $\pm 10\%$ (K)
- Rated voltage VDC 850, 1200, 2000, 2500, 3000
- Rated voltage VAC 450, 500, 630, 700, 750
- Test voltage between terminals Working voltage  $\leq$  2000VDC  
2.5 x rated voltage VDC for 2 seconds  
Working voltage  $\geq$  2000VDC  
2.0 x rated voltage VDC for 2 seconds
- Dissipation factor ( $\tan \delta$ )  $\leq 0.0005$  at 1KHz and 25°C
- Temperature range -25°C to +85°C
- Insulation resistance at 25°C & at a test voltage of 500 VDC applied for 1 minute  $C \leq 0.33$  MFD     $\geq 50,000\text{M}\Omega$   
 $C > 0.33$  MFD     $\geq 30,000\text{M}\Omega$

#### Marking on Capacitors

Each capacitor will have the following information printed on it, sequentially:

- The Company name in words ALCON
- The capacitor grade viz KP-6
- The capacitance value MFD
- The rated voltage VDC
- Capacity tolerance and manufacturing code
- Part number on non-standard capacitors

## SNUBBER CAPACITOR WITH AXIAL LEADS

KP-6

### Standard Capacitor Values

#### Working Voltage 850 VDC (450 VAC)

Rated Capacitance MFD	Dimensions in mm*			Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & 55°C Amps	ESR Max at 100KHz mΩ	Ordering Code
	D	L	d						
0.100	17.0	35.0	0.8	O3	1100	110.00	6.00	12.00	SI00U100850AJ0030AXLK01
0.150	17.0	35.0	0.8	O3	1100	165.00	6.00	11.50	SI00U150850AJ0030AXLK01
0.220	19.0	42.0	0.8	O4	1000	220.00	7.00	10.20	SI00U220850AJ0040AXLK01
0.330	19.0	42.0	1.0	O4	1000	330.00	7.00	9.00	SI00U330850AJ0040AXLK01
0.470	19.0	55.0	1.0	O7	900	423.00	8.00	8.60	SI00U470850AJ0070AXLK01
0.680	19.0	55.0	1.0	O7	900	612.00	8.00	8.30	SI00U680850AJ0070AXLK01
1.000	25.0	55.0	1.2	O5	900	900.00	10.00	7.60	SI000010850AJ0050AXLK01
1.200	25.0	55.0	1.2	O5	900	1080.00	11.00	7.20	SI01U200850AJ0050AXLK01
1.500	25.0	55.0	1.2	O5	900	1350.00	12.00	6.80	SI01U500850AJ0050AXLK01
2.000	30.0	55.0	1.2	O6	900	1800.00	12.00	5.60	SI000020850AJ0060AXLK01

#### Working Voltage 1200 VDC (500 VAC)

Rated Capacitance MFD	Dimensions in mm*			Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & 55°C Amps	ESR Max at 100KHz mΩ	Ordering Code
	D	L	d						
0.047	15.0	23.0	0.8	O1	1400	65.00	5.00	18.00	SI0U0471200AJ0020AXLK01
0.068	15.0	23.0	0.8	O2	1400	95.00	6.00	13.00	SI0U0681200AJ0020AXLK01
0.100	17.0	35.0	1.0	O3	1300	130.00	8.00	11.00	SI0U101200AJ0030AXLK01
0.150	17.0	35.0	1.0	O3	1300	195.00	8.20	8.20	SI0U151200AJ0030AXLK01
0.220	19.0	42.0	1.0	O4	1200	264.00	8.20	7.80	SI0U221200AJ0040AXLK01
0.330	19.0	42.0	1.0	O4	1200	396.00	9.10	7.30	SI0U331200AJ0040AXLK01
0.470	19.0	55.0	1.0	O7	1000	470.00	11.00	6.80	SI0U471200AJ0070AXLK01
0.680	19.0	55.0	1.2	O7	1000	680.00	12.00	5.30	SI0U681200AJ0070AXLK01
1.000	25.0	55.0	1.2	O5	1000	1000.00	12.00	5.00	SI000011200AJ0060AXLK01
1.200	30.0	55.0	1.2	O6	1000	1200.00	12.00	4.80	SI01U201200AJ0060AXLK01
1.500	30.0	55.0	1.2	O6	1000	1500.00	12.00	4.20	SI01U501200AJ0060AXLK01

#### Working Voltage 2000 VDC (630 VAC)

Rated Capacitance MFD	Dimensions in mm*			Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100KHz & 55°C Amps	ESR Max at 100KHz mΩ	Ordering Code
	D	L	d						
0.010	12.0	23.0	0.8	O1	1700	17.00	3.00	42.00	SI0U0102000AJ0010AXLK01
0.015	15.0	23.0	0.8	O2	1700	26.00	4.00	40.30	SI0U0152000AJ0020AXLK01
0.022	15.0	23.0	0.8	O2	1700	37.00	6.00	36.50	SI0U0222000AJ0020AXLK01
0.033	17.0	35.0	0.8	O3	1700	56.00	7.00	24.20	SI0U0332000AJ0030AXLK01
0.047	17.0	35.0	0.8	O3	1700	80.00	8.00	15.30	SI0U0472000AJ0030AXLK01
0.068	17.0	35.0	1.0	O3	1700	116.00	9.00	14.20	SI0U0682000AJ0030AXLK01
0.100	19.0	42.0	1.0	O4	1000	100.00	9.00	8.60	SI0U102000AJ0040AXLK01
0.150	19.0	42.0	1.0	O4	1000	150.00	10.00	7.20	SI0U152000AJ0040AXLK01
0.220	25.0	55.0	1.0	O5	900	198.00	11.00	6.50	SI0U222000AJ0050AXLK01
0.330	30.0	55.0	1.2	O6	900	297.00	11.00	4.60	SI0U332000AJ0060AXLK01

Custom-designed capacitors are available on request

\* Refer to "Capacitor Drawing" on page 53

## SNUBBER CAPACITOR WITH AXIAL LEADS

KP-6

### Standard Capacitor Values

#### Working Voltage 2500 VDC (700 VAC)

Rated Capacitance MFD	Dimensions in mm*			Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100kHz & 55°C Amps	ESR Max at 100kHz mΩ	Ordering Code
	D	L	d						
0.033	17.0	35.0	0.8	O3	1500	49.50	4.00	20.00	SI0U0332500AJ0030AXLK01
0.047	17.0	35.0	0.8	O3	1500	70.50	6.00	13.00	SI0U0472500AJ0030AXLK01
0.068	17.0	35.0	1.0	O3	1500	102.00	8.20	11.00	SI0U0682500AJ0030AXLK01
0.100	19.0	42.0	1.0	O4	1200	120.00	8.20	8.90	SI0U0102500AJ0040AXLK01
0.150	19.0	42.0	1.2	O4	1200	180.00	8.20	7.70	SI0U0152500AJ0040AXLK01
0.220	19.0	55.0	1.2	O7	1000	220.00	9.10	6.90	SI0U0222500AJ0070AXLK01
0.330	25.0	55.0	1.2	O5	1000	330.00	10.80	5.80	SI0U0332500AJ0050AXLK01
0.470	25.0	55.0	1.2	O5	1000	470.00	12.00	4.20	SI0U0472500AJ0050AXLK01

#### Working Voltage 3000 VDC (750 VAC)

Rated Capacitance MFD	Dimensions in mm*			Case Code	DV/DT V/ $\mu$ Sec	I Peak Amps	Irms Max at 100kHz & 55°C Amps	ESR Max at 100kHz mΩ	Ordering Code
	D	L	d						
0.010	12.0	23.0	0.8	O1	2800	28.00	2.00	62.00	SI0U0103000AJ0010AXLK01
0.015	12.0	23.0	0.8	O1	2800	42.00	3.00	41.00	SI0U0153000AJ0010AXLK01
0.022	15.0	23.0	0.8	O2	2800	62.00	4.00	28.00	SI0U0223000AJ0020AXLK01
0.033	17.0	35.0	1.0	O3	1500	50.00	5.00	19.80	SI0U0333000AJ0030AXLK01
0.047	19.0	55.0	1.0	O3	1000	47.00	6.50	18.00	SI0U0473000AJ0070AXLK01
0.068	19.0	55.0	1.0	O7	1000	68.00	8.00	12.50	SI0U0683000AJ0070AXLK01
0.100	19.0	55.0	1.2	O7	1000	100.00	8.00	8.90	SI0U0103000AJ0070AXLK01
0.150	19.0	55.0	1.2	O7	1000	150.00	11.00	6.70	SI0U0153000AJ0070AXLK01
0.220	25.0	55.0	1.2	O5	1000	220.00	12.00	4.80	SI0U0223000AJ0050AXLK01
0.330	30.0	55.0	1.2	O6	1000	330.00	12.00	4.20	SI0U0333000AJ0060AXLK01


Custom-designed capacitors are available on request

\* Refer to "Capacitor Drawing" on page 53

## SNUBBER CAPACITOR WITH AXIAL LEADS

KP-6

### Capacitor Drawing and Terminal Style

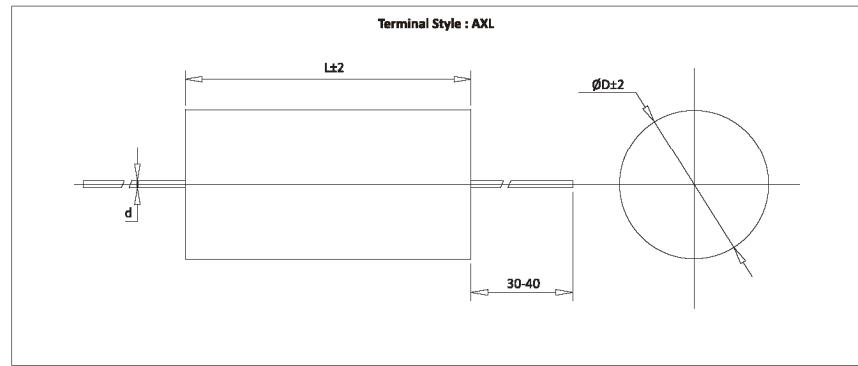

Dimensions in mm

### Precaution

1. These capacitors are not suitable for 'across the line' applications
2. VAC (rated) : Frequency should be less than 1000Hz
3. VDC(rated) : 1.4 x Vrms + VDC should be less than rated VDC

## Part Number System

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
1	2	3 to 7			8 to 11			12 to 13		14 to 16		17 to 20			21	22 to 23						

**Standard / Non-standard**

S - Standard  
N - Non-standard

**Series**

A - Aluminium Electrolytic Capacitors  
I - IGBT Snubber Capacitors  
D - DC-Link Capacitors  
P - Power Film Capacitors

**Capacitance Rating**

example : 00U68 - 0.680 MFD  
01U50 - 1.50 MFD  
00001 - 1.00 MFD  
05U60 - 5.6 MFD  
00003 - 3.00 MFD

**Voltage Rating**

example : 1000 - 1000 VDC/VRMS  
0450 - 450 VDC/VRMS  
0700 - 700 VDC/VRMS  
2500 - 2500 VDC/VRMS

**Grade**

example : AG - KP3C  
AJ - KP6  
AK - MP4A  
AM - MKR9  
AN - MKRS

**Case code**  
(Refer table)

**Terminal Style**  
Refer Table  
Drawing

**Tolerance**  
M :  $\pm 20\%$   
K :  $\pm 10\%$   
J :  $\pm 5\%$ 
**Canias Code**  
By Default - 01

## Cautions For Proper Use Of Film Capacitors

**SAFETY INSTRUCTION**

- Do not exceed the upper category temperature (UCT).
- Do not apply any mechanical stress to the capacitor terminals.
- Avoid any compressive, tensile or flexural stress.
- Do not move the capacitor after it has been assembled
- Do not exceed the specified torque limits during assembly.
- Avoid external energy inputs, such as fire or electricity.
- Avoid overload of the capacitors.
- Consult us if application is with severe temperature and humidity condition.
- There are no serviceable or repairable parts inside the capacitor. Opening the capacitor or any attempts to open or repair the capacitor will void the warranty and liability of ALCON

**DISPOSAL**

For disposal do either of the followings.

1. Incineration (at high temperature over 800°C) after piercing or crushing capacitor body.
2. Consignment to specialists of industrial waste. As per the compliance prescribed by the law.

## Other Products



### Power Film Capacitors- High and Medium Frequency

Capacitance Range	- 0.010 MFD to 85 MFD
Max Power	- 100 KVAR to 1500 KVAR
Frequency Range	- 5.2 KHz to 1900 KHz
Max Current	- Up to 3000 Amps

#### Typical Applications

Induction Heating, Plasma Generators, Medical Equipment, Wireless EV Chargers, Magnetisers and Traction Equipment.



### DC-Link Capacitors – Screw terminal and PCB mounting

Capacitance Range	- 1 MFD to 2350 MFD
Rated Voltage Range	- 400 VDC to 2400 VDC
Mounting Pitch	- 45 mm (for screw terminal) 27.5, 37.5, 52.5 mm (for PCB mounting)
Frequency Range	- 10 KHz to 100 KHz

#### Typical Applications

High Frequency Ripple Filtering in UPS, AC Drives, High Power IGBT Inverter, Induction Heating Equipment, Traction & Medical Equipment.



### Aluminium Electrolytic Capacitors

Capacitance Range	- 330 MFD to 470000 MFD
Rated Voltage Range (VDC)	- 50 VDC to 550 VDC
Can Sizes	- 50 mm Ø x 80 L mm to 120 mm Ø x 240 L mm
Temperature Rating	- 40°C to + 70°C 40°C to + 85°C 40°C to + 105°C

#### Typical Applications

High ripple current applications like PWM Inverters, High KVA online UPS, Frequency converters, AC drives, High reliability power supplies, solar and wind inverters. HED range is designed for large instant energy discharge applications like Laser, X-ray equipment, welding machines, magnetisers & other pulse discharge applications



### AUTHORISED DISTRIBUTOR

Designed and Printed by Delta Graphics



34-B, MIDC Industrial Estate, Satpur, Nashik - 422 007. India.  
Phone : +91 - 0253 - 235 0533, +91 - 0253 - 235 0237 Fax : +91 - 0253 - 235 1682  
e-mail : mail@alconelectronics.com website : www.alconelectronics.com  
CIN : U32109MH1973PTCO16792

Catalogue No. AEPL-IGBT SNUBBER CAPACITORS - FEBRUARY 2020

The specification shown in this catalogue (1 to 55) pertain to the current manufacturing range of the company. The Company reserves the right to change and /or modify any part of or whole of the specifications as a result of research and development and as may be necessary, without prior notice.

All Products not for marketing / sale in all countries.

© Alcon Electronics Pvt. Ltd.