



SUPERCAPACITOR & FUEL CELL COMPONENT

VINATech Passion for Challenge To Be Continued

Distribution
Partner



800.348.5580
630.208.2200



rellpower.com
rellpower@rell.com



VINATech Passion for Challenge To Be Continued

CONTENTS

03

FUEL CELL COMPONENT

15



SUPERCAPACITOR

29

ABOUT VINATECH



FUEL CELL COMPONENT




Leading manufacturer of Supercapacitor and Fuel Cell Component





Fuel Cell Component HYDROGEN ECONOMY

The term “hydrogen economy” refers to the vision of using hydrogen as a low-carbon energy source replacing, for example, gasoline as a transport fuel or natural gas as heating fuel. Hydrogen is burned to produce heat or reacted with air in a fuel cell to produce electricity, the only byproduct is water. To phase out fossil fuels and limit global warming, hydrogen can be created from water using intermittent renewal sources such as wind and solar, and its combustion only releases water vapor to the atmosphere. The fuel cell is a core part of “Hydrogen energy”, which is being used for generating energy.

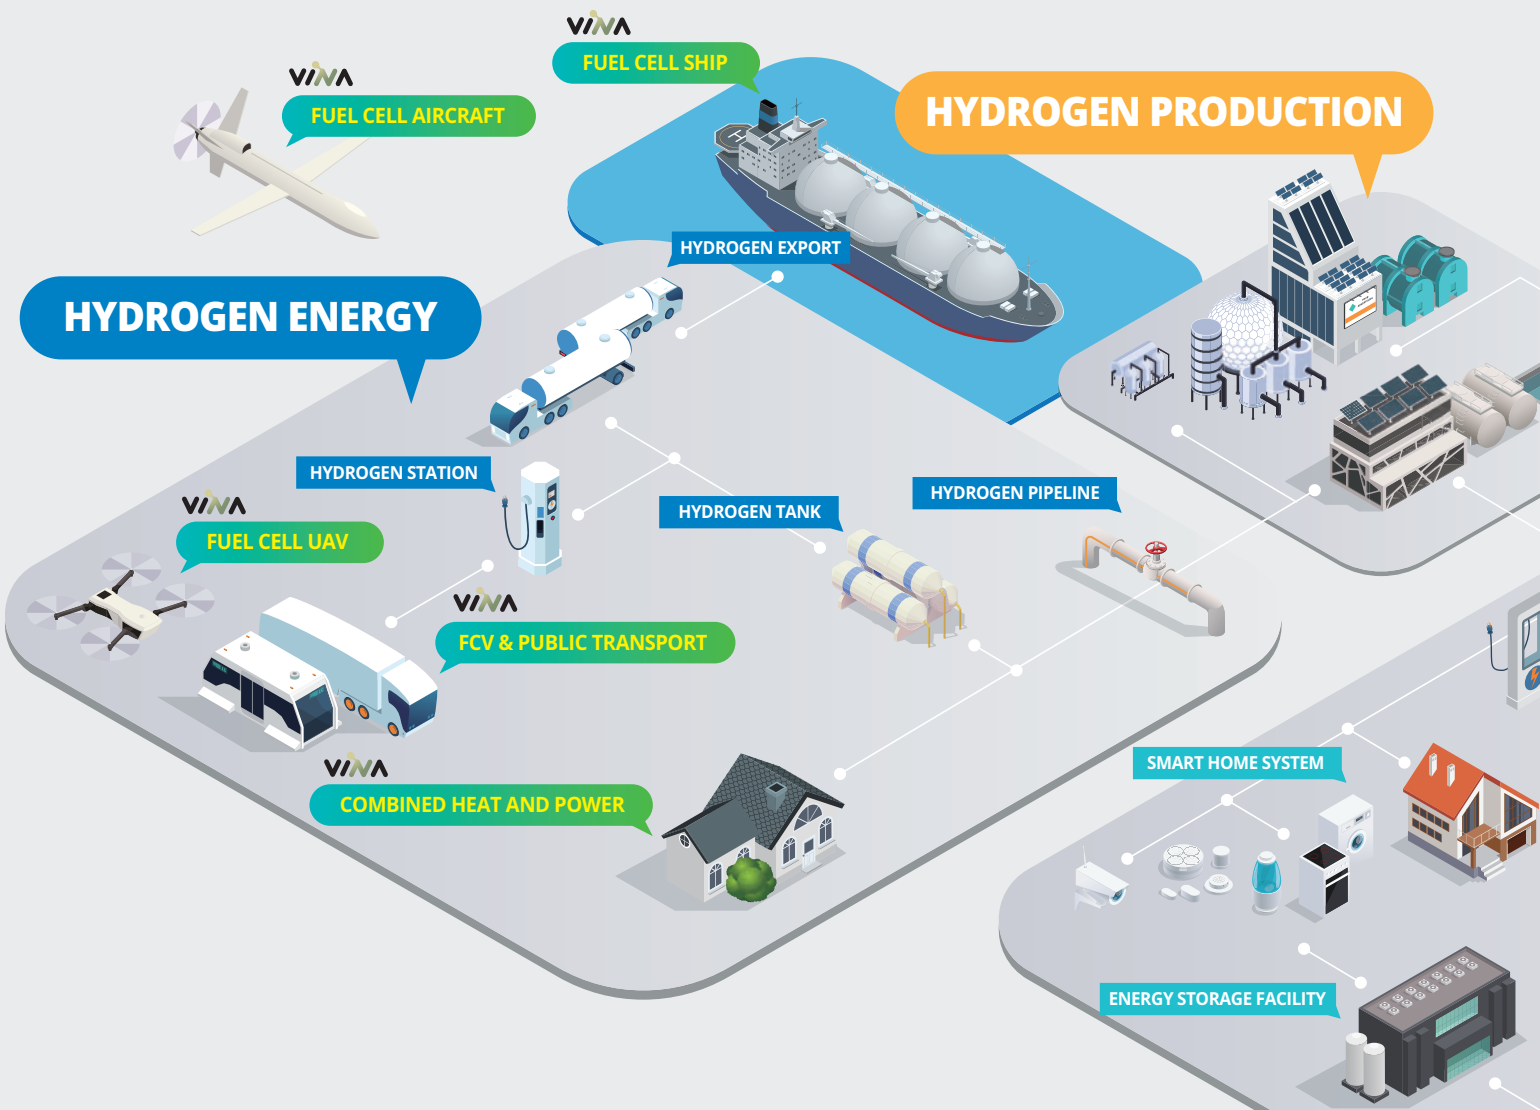

HYDROGEN

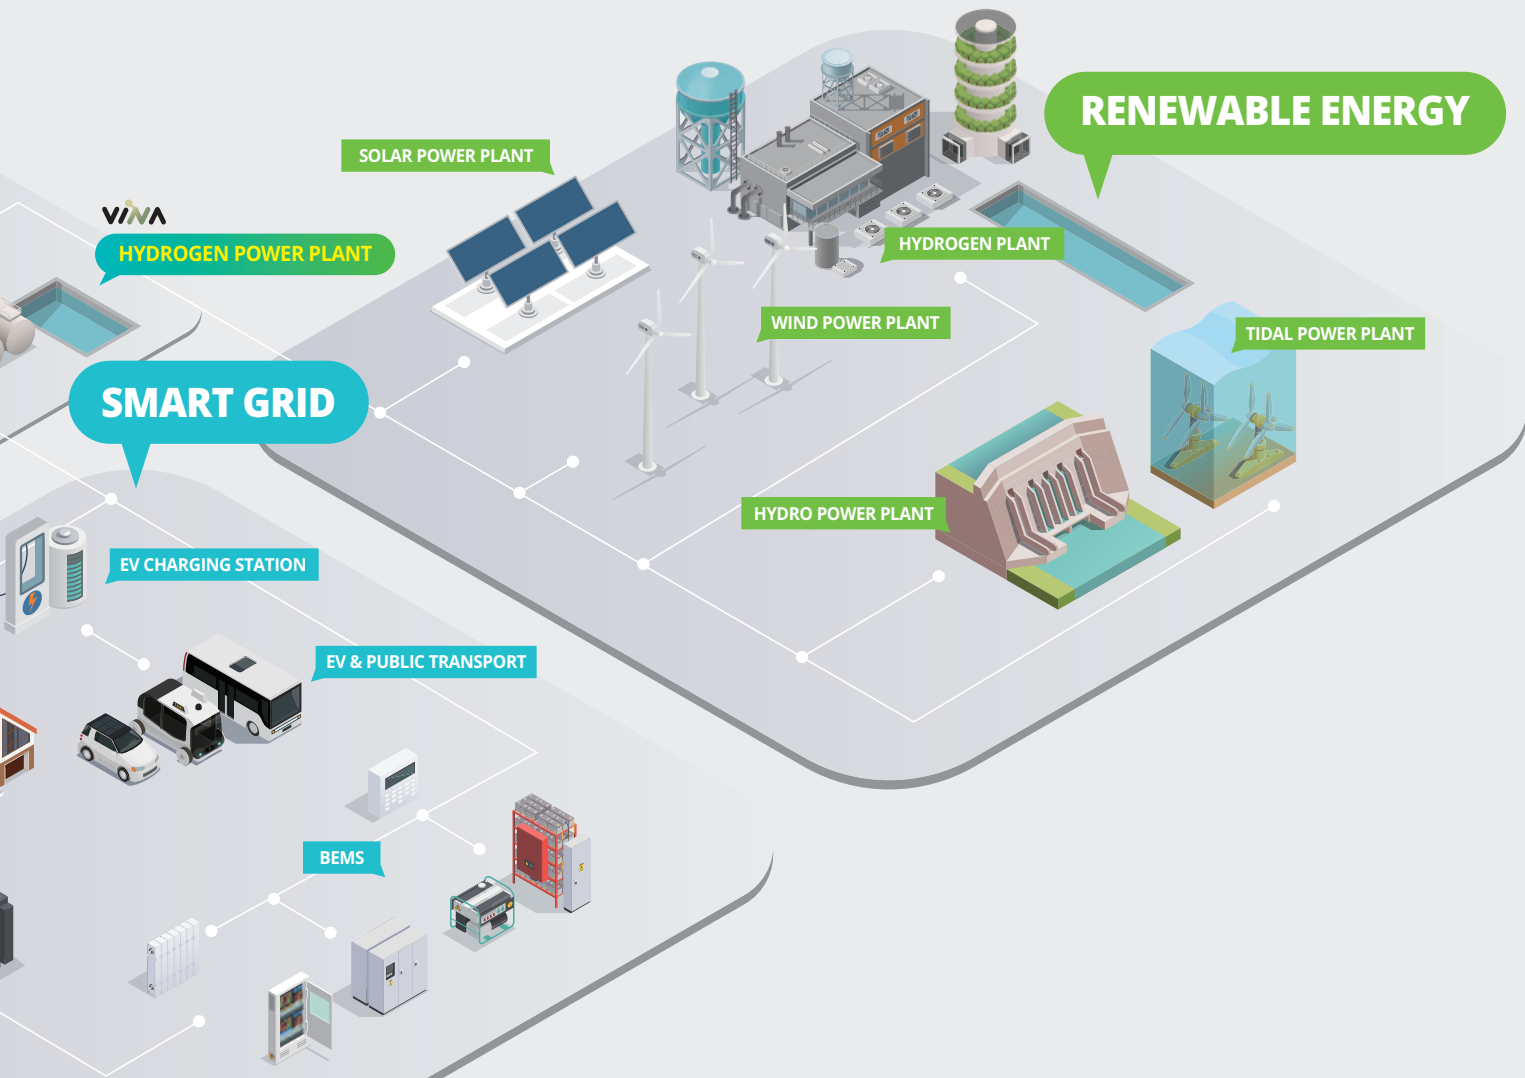

ECONOMY




Fuel Cell Component PRODUCT APPLICATIONS AREA




TRANSPORTATION

- Automotive
- Commercial vehicle
- Specialty vehicle
- Vessel
- Rail & Tram
- Heavy Equipment
- Drone
- Airplane

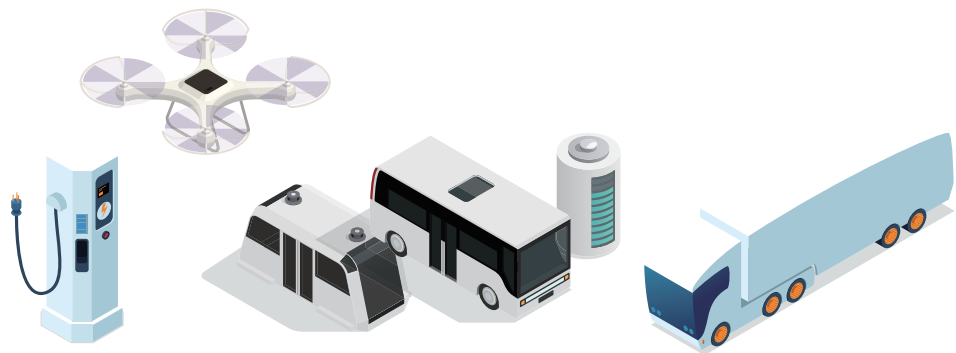

STATIONARY

- Combined heat and power (CHP)
- Primary power units
- UPS

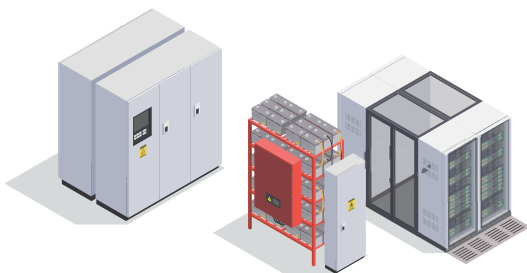

PORTABLE

- Portable product
- Military Equipment








Fuel Cell Component CARBON SUPPORT

Sphere carbon black

- High mesopore ratio : High surface area
- High crystallinity and strong adhesion : High anti-corrosion and stability




| Part No. | BET (m ² /g) | XRD (d002, nm) | XRD (Lc, nm) |
|------------|-------------------------|----------------|--------------|
| VFS-SP0450 | 400 - 500 | 0.345 - 0.355 | 2.0 ~ 3.5 |
| VFS-SP0750 | 700 - 800 | 0.345 - 0.355 | 1.5 ~ 2.5 |

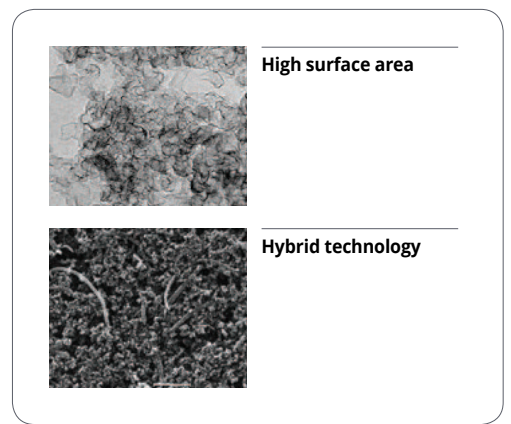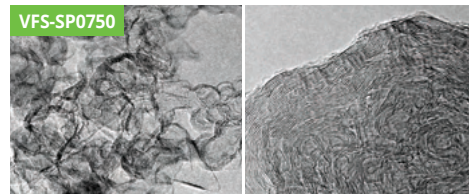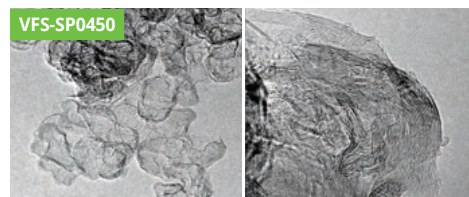

Carbon NanoFiber

- Uniform edge surface : High electrical conductivity
- High crystallinity : High durability

| Part No. | Diameter (nm) | BET (m ² /g) | XRD (d002, nm) | XRD (Lc, nm) |
|-----------|---------------|-------------------------|----------------|--------------|
| VFS-PL001 | 80 - 350 | 50 - 70 | 0.336 - 0.338 | 13 ~ 17 |
| VFS-PL002 | 100 - 220 | 70 - 100 | 0.336 - 0.338 | 7 ~ 10 |
| VFS-HE001 | 20 - 70 | 100 - 160 | 0.34 - 0.343 | 3 ~ 4 |
| VFS-HE002 | 100 - 150 | 40 - 70 | 0.34 - 0.343 | 4 ~ 5 |

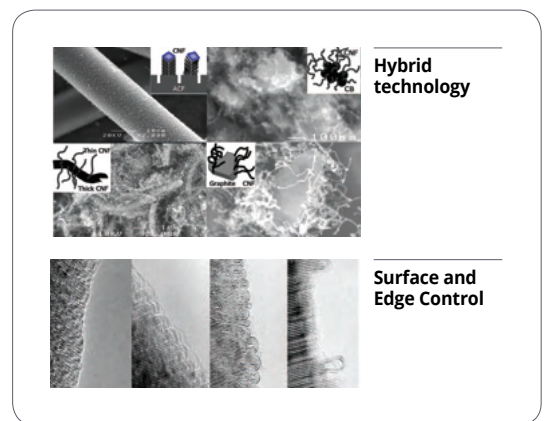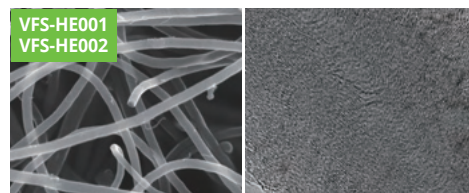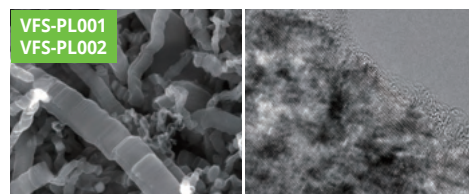



Fuel Cell Component

CARBON SUPPORT DURABILITY

PEMFC MEA (25 cm²) single-cell carbon corrosion AST (Accelerated Stress Test) results show VINATech's carbon support durability is better than competitor's.





Performance and Durability test

Electrochemical analysis MEA in single cell (25 cm²)

High voltage durability test (1.0 ~ 1.5 V, 500 mV/s, 5 k - 10 k cycling)

Test Condition

- T Cell : 60 °C
- P Cell : An / Ca = 1 bara / 1 bara
- Flow : H₂ / N₂ = 200 cc / 600 cc
- RH : An / Ca = 100 % / 100 %
- Cycle : 500 mV/s (1.0 - 1.5 V, 5 k cycling)

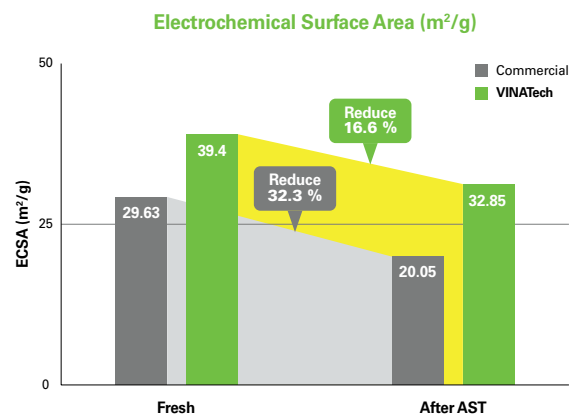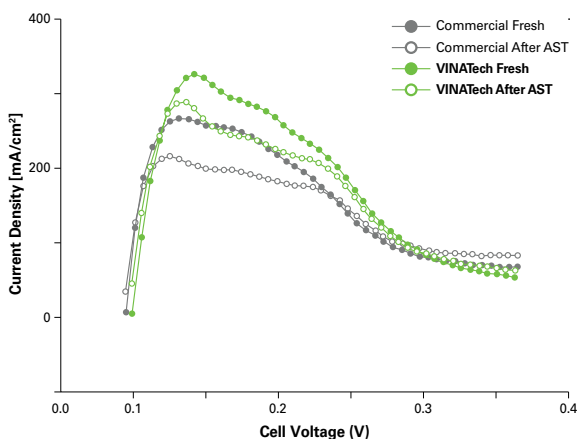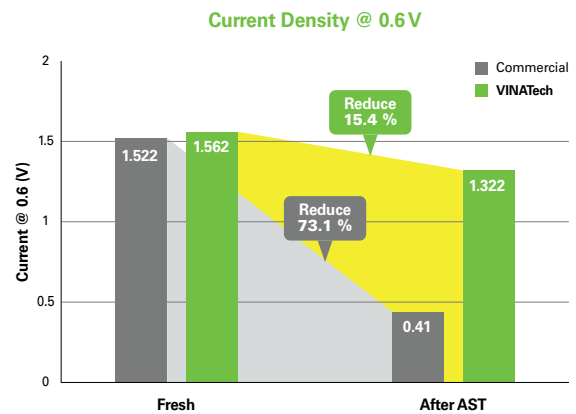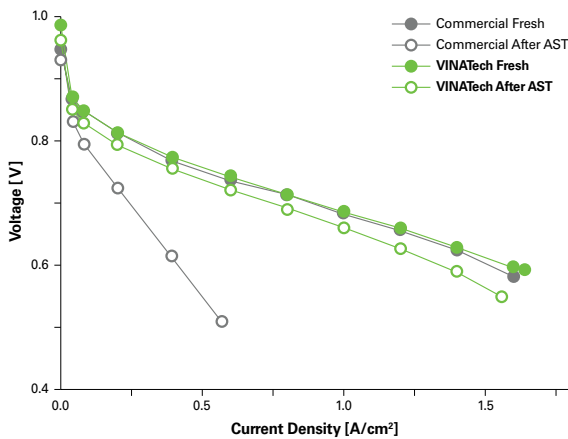





Fuel Cell Component CATALYST





- High ECSA (Electrochemically active Surface Area)
- High mass activity
- Catalysts are stable and highly dispersed

| Division | Pt content (%) | ECSA (m ² /g) | Particle size (nm) | Support type |
|----------------|----------------|--------------------------|--------------------|--------------|
| VFC-SP (Grade) | 20 ~ 60 | 50 ~ 60 | 2.5 ~ 3.0 | Carbon black |
| VFC-HE (Grade) | | 30 ~ 45 | 2.5 ~ 2.8 | Herringbone |

VFC-SP (Grade)

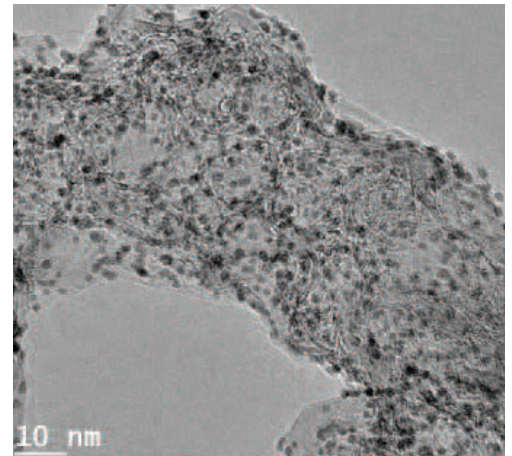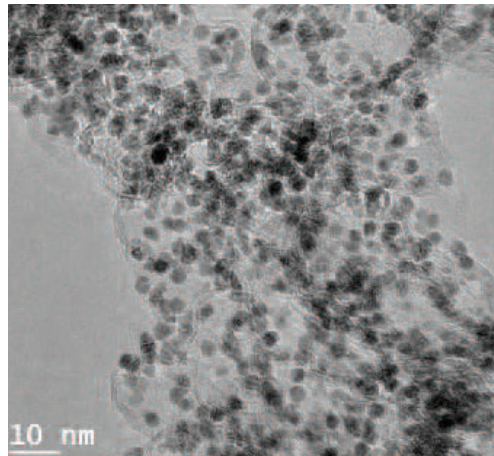

VFC-HE (Grade)

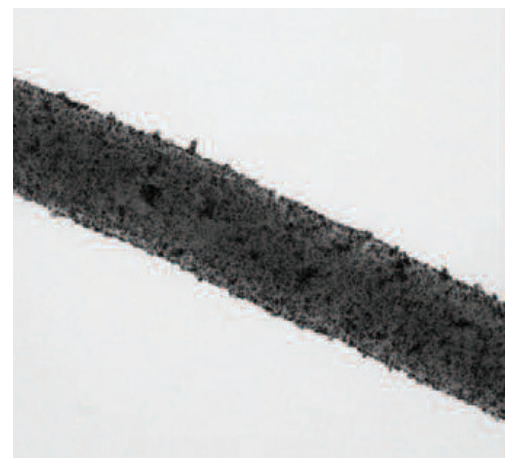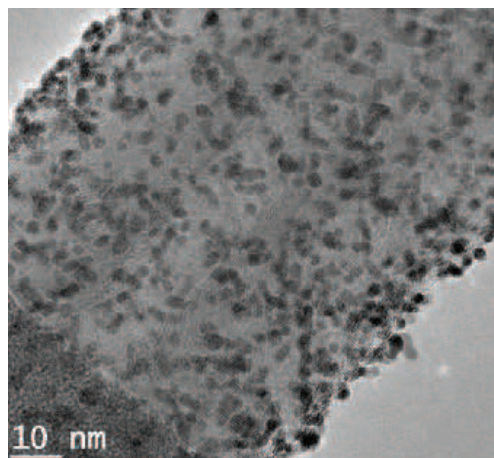



Fuel Cell Component CATALYST DURABILITY





PEMFC MEA (25 cm²) single-cell catalyst durability AST(Accelerated Stress Test) results show VINATech's catalyst durability is better than competitor's.

Performance and Durability test

Electrochemical analysis MEA in single cell (25 cm²) (0.6 - 0.95 V 30 K Cycle)

I-V Test condition

- T Cell : 60 °C
- P Cell : An / Ca = 1 bara / 1 bara
- SR : H₂ / Air = x 1.5 / x 2.0
- RH : An = 100 %, Ca = 100 %

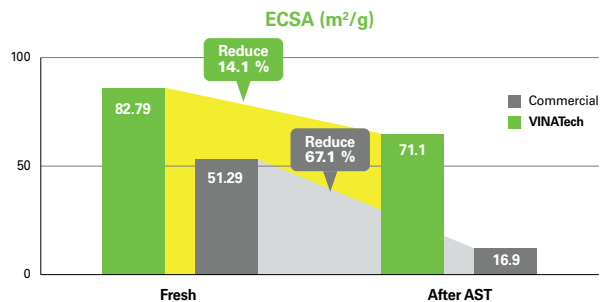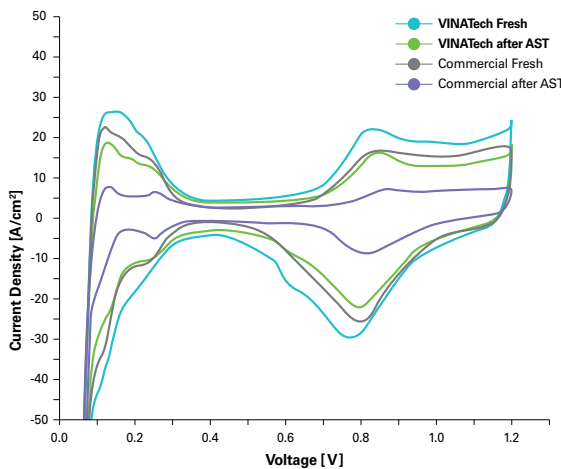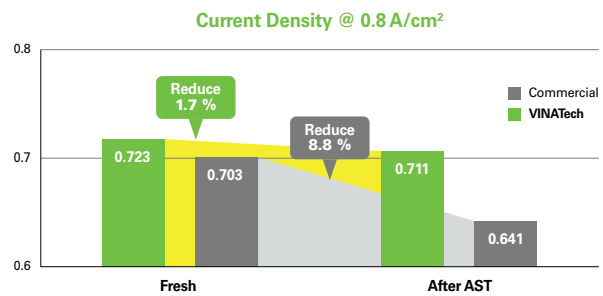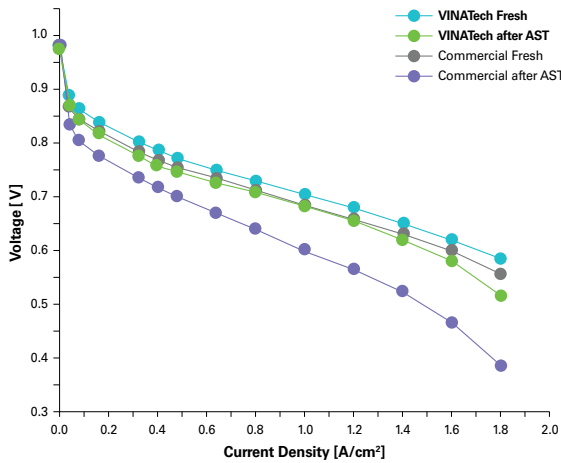




Fuel Cell Component


MEA (Membrane Electrode Assembly)

- Available to PEMFC & DMFC
- High reliability and durability
- High performance at any environments
- Customized layer (CCM, 5, 7)

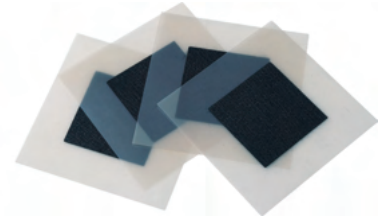

Sensitivity test


Electrochemical analysis MEA in single cell (25 cm²)

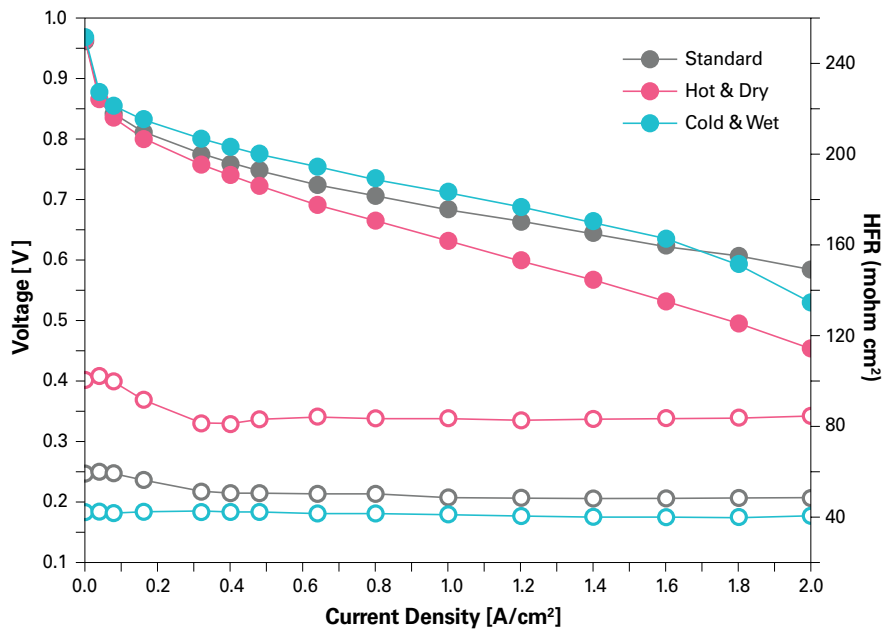

Test Condition

| Division | T Cell (°C) | RH A/C (%) | P Cell (bara) | SR A/C (λ) |
|----------|-------------|------------|---------------|------------|
| Std. | 70 - 75 | 100/50 | 2.5 | 1.4/2.5 |
| Hot&Dry | 75 - 80 | 30/30 | 2.5 | 1.4/2.5 |
| Cold&Wet | 60 - 65 | 100/100 | 2.5 | 1.4/2.5 |

Test Sample

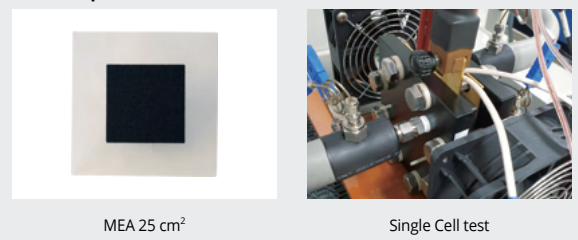

| Division | mV @ 250 mA/cm ² | mV @ 500 mA/cm ² | mV @ 1,000 mA/cm ² | mV @ 1,500 mA/cm ² | mV @ 2,000 mA/cm ² |
|------------|-----------------------------|-----------------------------|-------------------------------|-------------------------------|-------------------------------|
| Standard | 793 | 747 | 685 | 636 | 584 |
| Hot & Dry | 778 | 719 | 633 | 550 | 456 |
| Cold & Wet | 814 | 775 | 716 | 651 | 530 |




Fuel Cell Component CUSTOMIZATION


VINATech is the only company that manufactures the carbon support, catalyst, and MEA (Membrane Electrode Assembly) for the fuel cell in Korea.

VINATech can handle all problems from carbon support to MEA, offer the best solution about MEA. The MEA can be customized to meet the customers' needs.

MEA/Single cell stack constructure

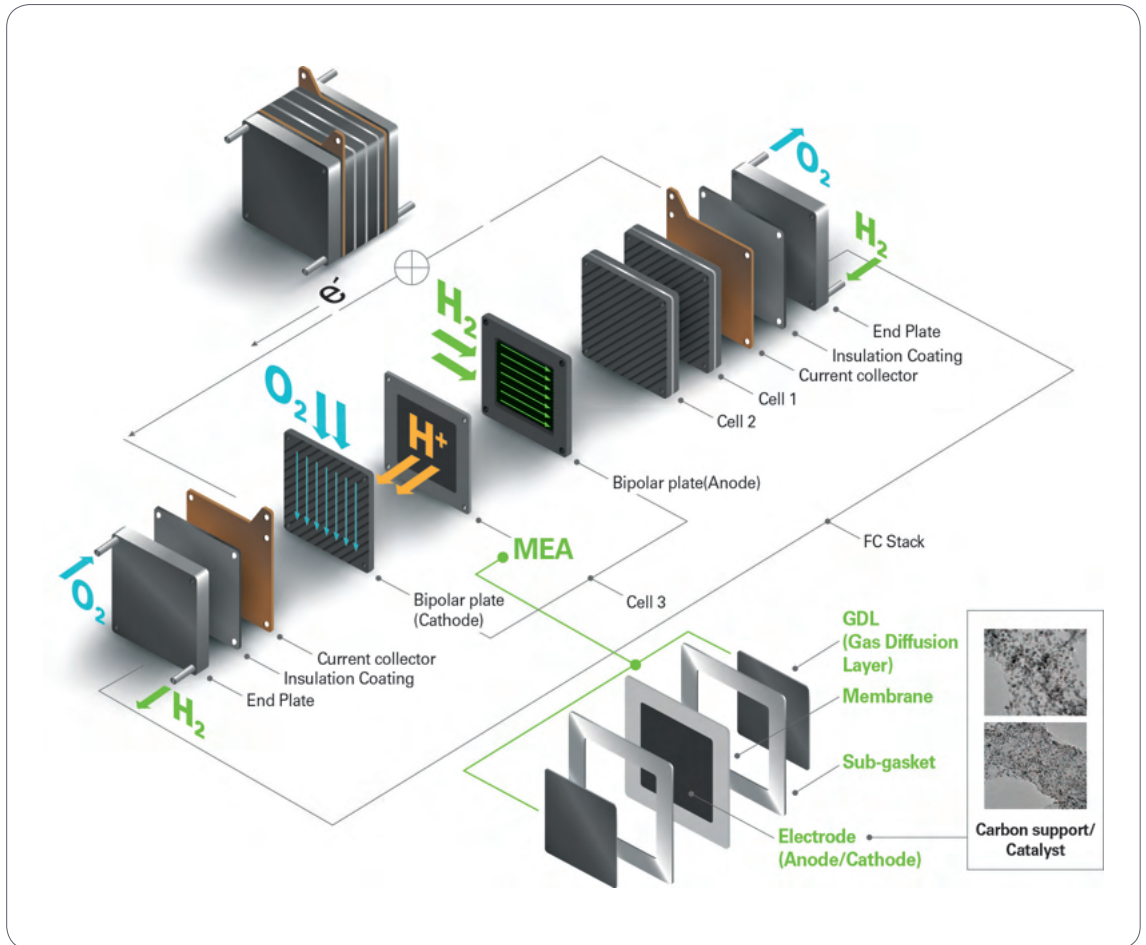

Optimum electrode structure

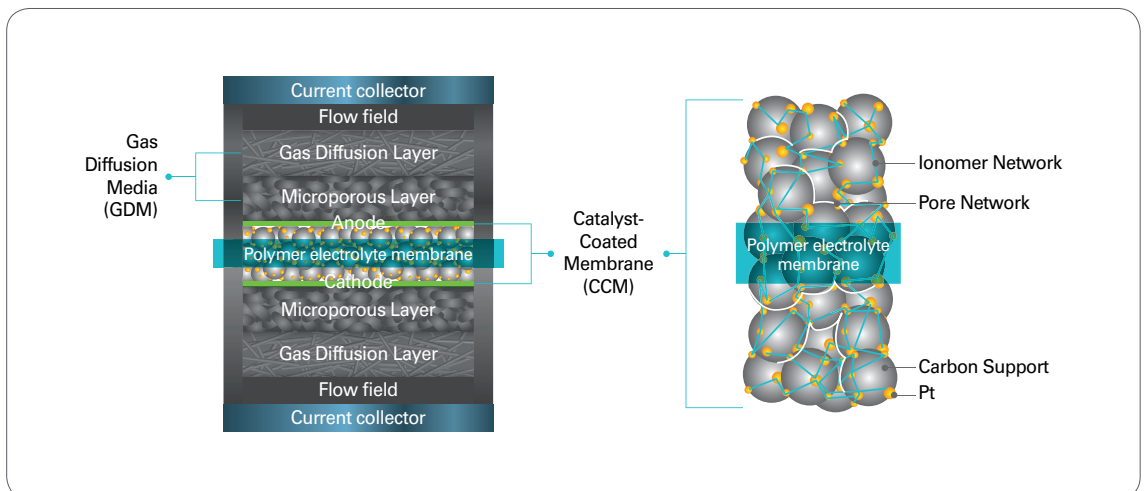





Fuel Cell Component

MEA COATING TECHNOLOGY


VINATech can evenly distribute catalysts within electrodes using their own MEA coating technology. Because of its MEA coating technology, it can improve long-term reliability and very little variation among MEA.

MEA Scanning Electron Microscope (SEM) Measurement result (500x)

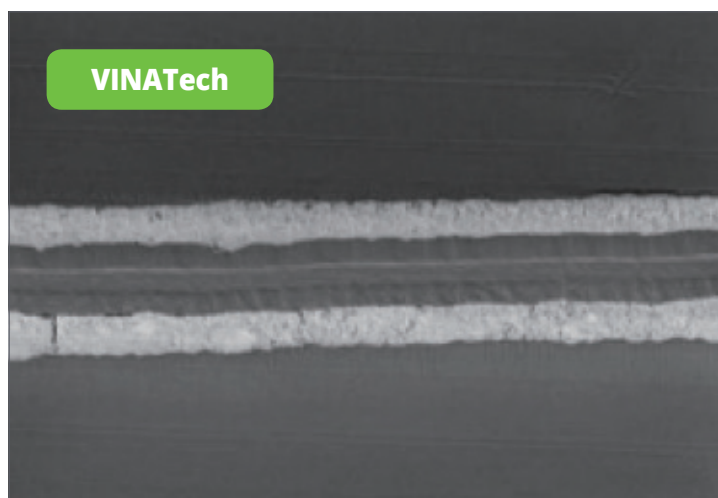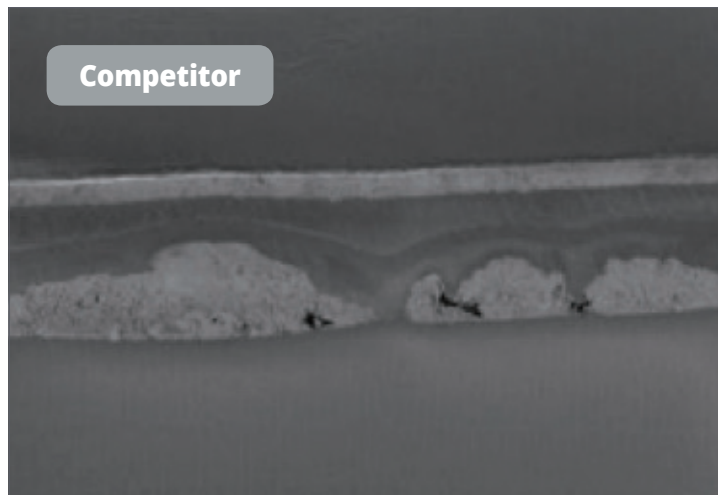




Fuel Cell Component DEVELOPMENT ROADMAP

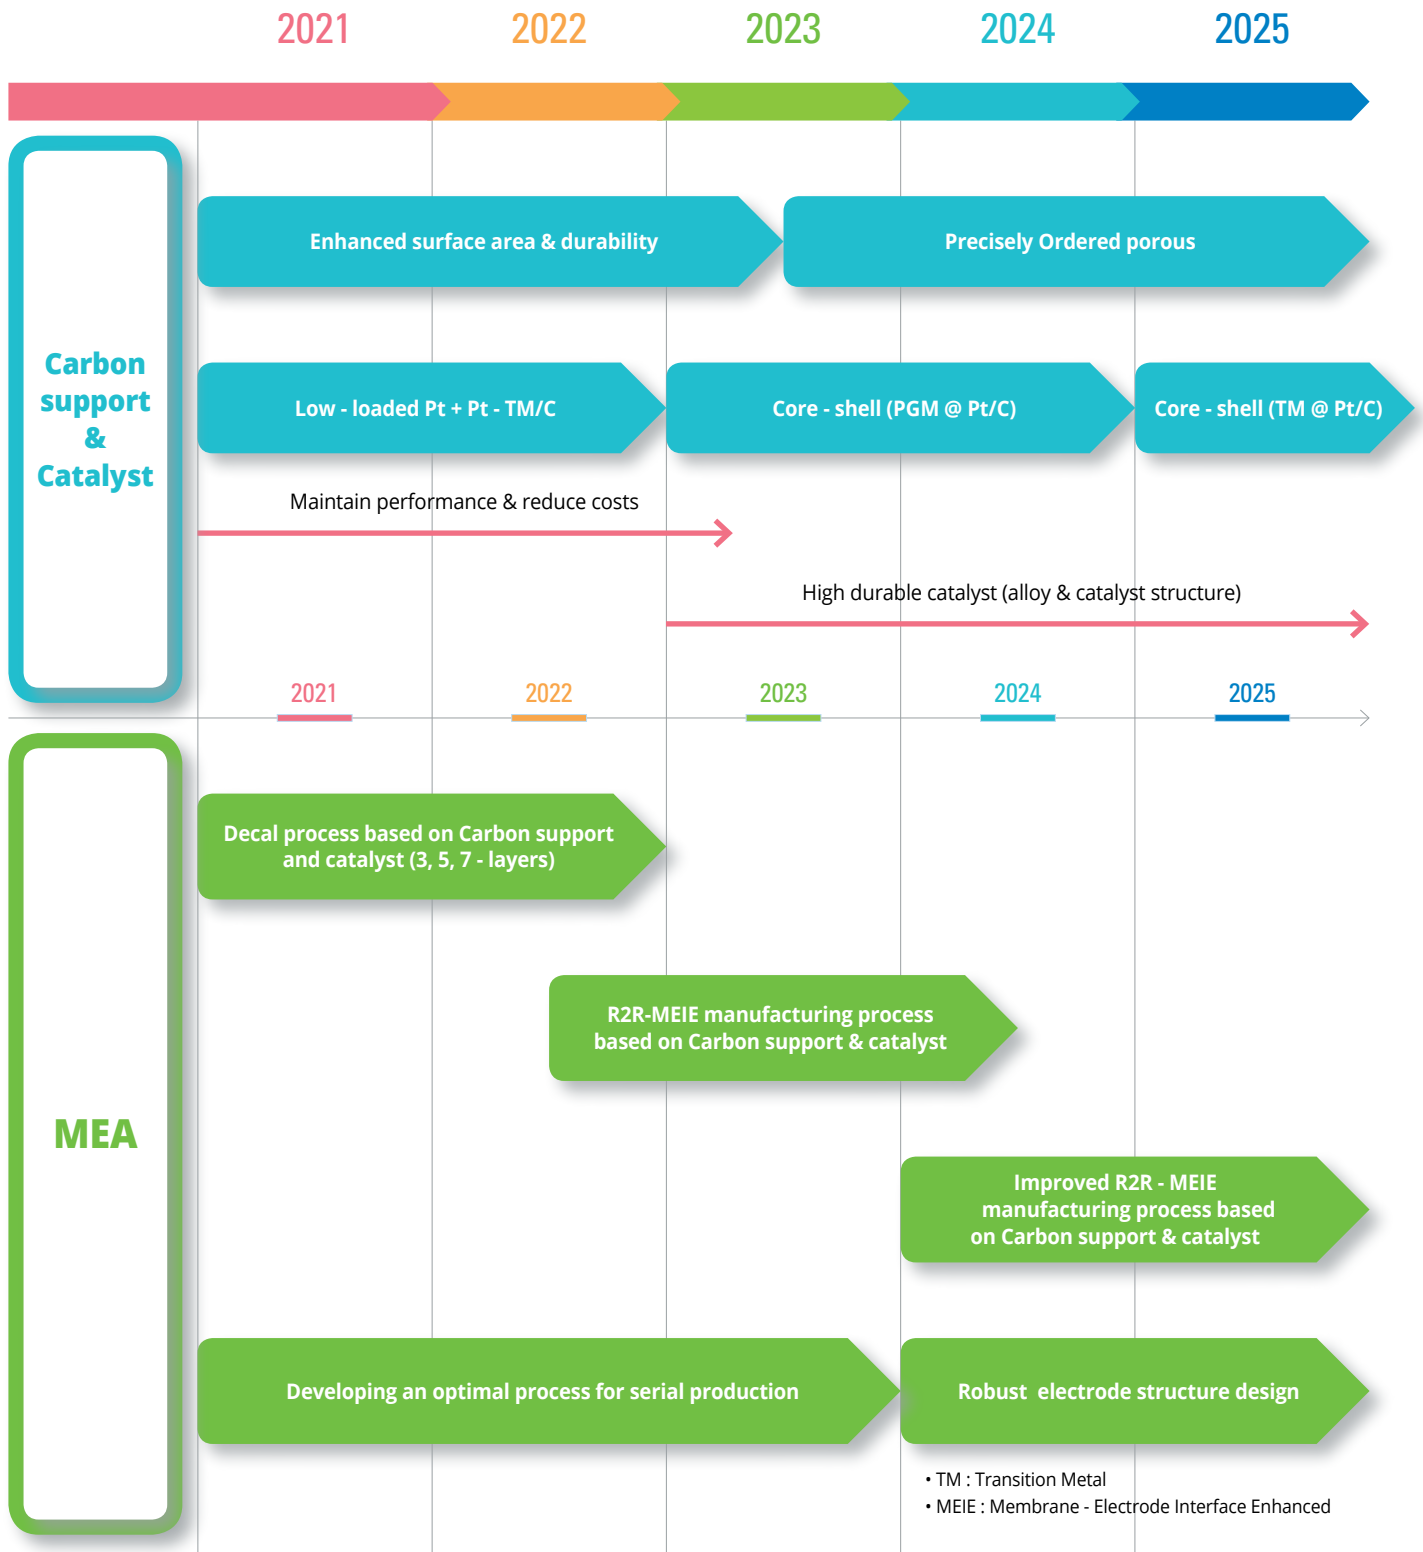

SUPERCAPACITOR



Leading manufacturer of Supercapacitor and Fuel Cell Component




Supercapacitor PRODUCT APPLICATIONS AREA



AUTOMOTIVE & AFTER-MARKET

- Navigation and Dash Camera
- Memory Back Up
- Car Subwoofer
- Compensate peak power
- Vehicle tracking and security
- Fail Safe applications, E-Call & E-Latch

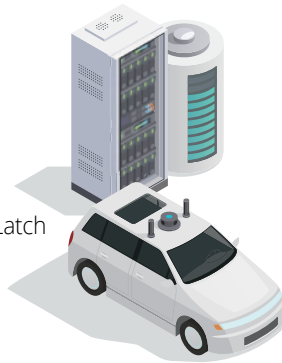


SENSOR NETWORKS, COMMUNICATIONS

- Long Term Back Up
- Pulse management
- 3.8 V Lithium Capacitor



UNINTERRUPTIBLE POWER SUPPLY(UPS), DYNAMIC VOLTAGE RESTORER(DVR)

- Responds to momentary blackouts
- Compensate peak power
- Engine cranking



SMART METERS / NETWORK EQUIPMENT



- Long life & Near maintenance free
- Wider operating temperature : -40 °C to +85 °C






MEMORY BACK UP

- RAID, SSD, NVDIMM, DRAM to NAND Flash, Cache protection power backup
- Applied spec. : 3.0 V (1 F ~ 100 F)
- Circuit configuration based on cache density and power requirements

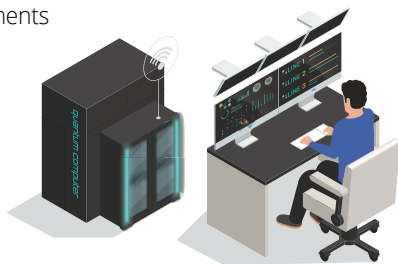

REGENERATIVE ENERGY STORAGE DEVICE

- Hybrid electric cars, suitable for elevators or railway vehicles
- Reduce energy cost and CO₂ emission

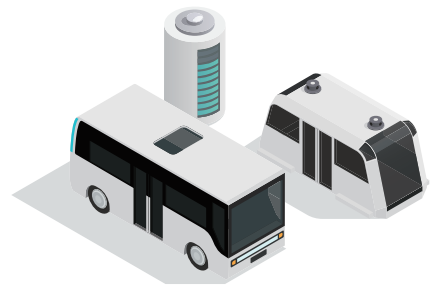


WIND TURBINE

- Pitch control
- Compensate peak power
- Long - Lasting & Near maintenance free



OTHER APPLICATION

- Medical & Dental equipment
- Actuators and Locking systems
- Building controls, Drones and Toys
- Robotics AGV Fault Indicators

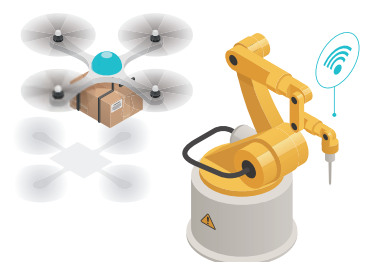




Supercapacitor INTRODUCTION


Environment-friendly Energy Storage Device

EDLC (Electric Double Layer Capacitor also known as Super Capacitor or Ultra Capacitor), are environment friendly energy storage devices with low energy density and high power density when compared to Battery technology. The advantages of EDLC are high current, fast charge and discharge, long cycle life (500,000 + cycles) and long lifetime with wide temperature ranges (-40 °C ~ +85 °C) RoHS, REACH & WEEE compliant safe for transportation.

VPC ranges are the new high density environment friendly Lithium Capacitor offer high energy, low ESR and ultra low Leakage Current in small packages.

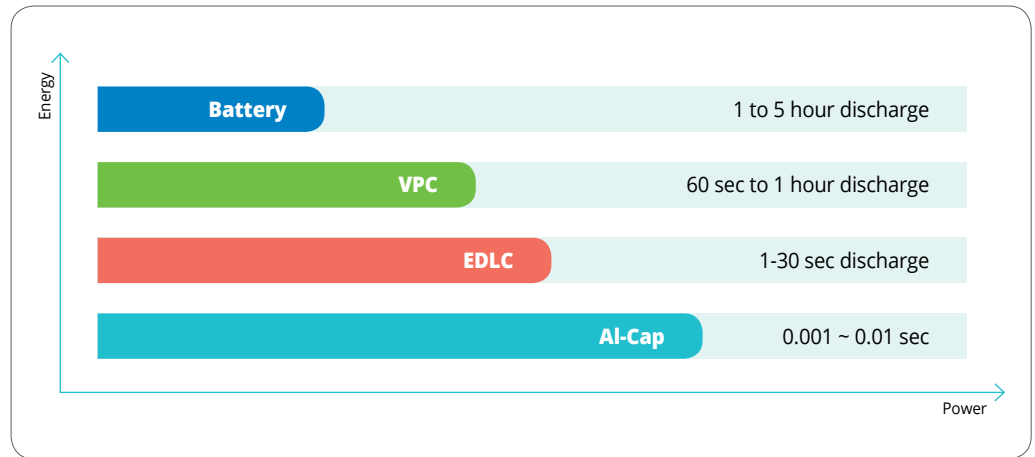

VINATech Supercapacitor Series

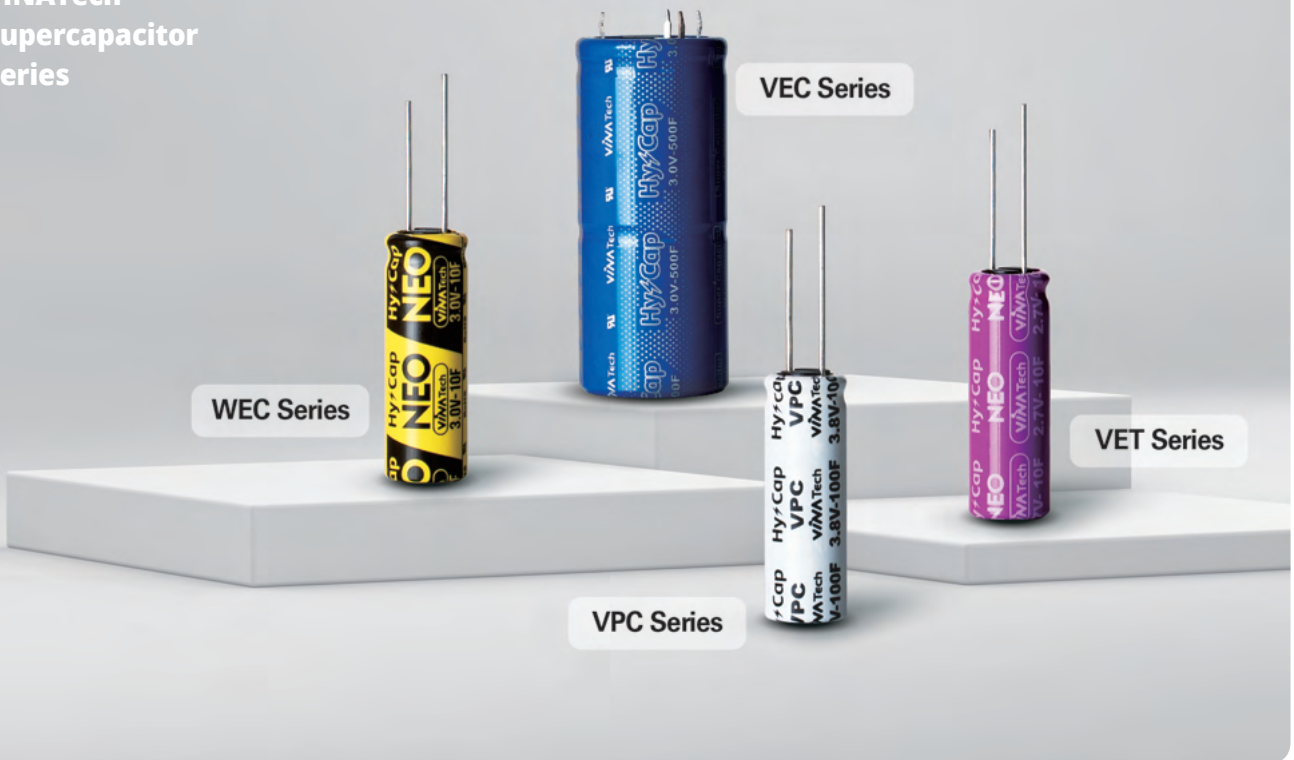




Supercapacitor CHARACTERISTICS

| Product Series | EDLC (VEC/WEC) | EDLC (VET) | VPC (VEL) |
|----------------------|---|--|--|
| Voltage | Rated Voltage 3.0 V | Rated Voltage 2.7 V | Operating Voltage Range 2.5 V to 3.8 V |
| Operating Temp. | -40 °C ~ +65 °C (+85 °C when de-rated) | -40 °C ~ +85 °C | -25 °C ~ +85 °C (-40 ~ 85 °C in Li/SOCL ₂ battery system) |
| High Temp. Load life | 1000 hours / V _R loaded under 65 °C | 1000 hours / V _R loaded under 85 °C | 1000 hours / 3.8 V loaded under 70 °C |
| Capacitance | ≤ 30 % of initial value | | ≤ 30 % of initial value |
| ESR | ≤ 2 times of specified value | ≤ 3 times of specified value | ≤ 2 times of specified value |
| 85 °C Voltage | De-rated voltage Max 2.4 V | Rated Voltage 2.7 V | Operating Voltage Range 2.5 V to 3.5 V |
| Cycle | 500,000 | | 50,000 |
| Shelf life storage | 3 years from manufacturing date No electrical charge & Temp. below 25 °C (ΔC : ≤ 10% of initial value / ΔESR : ≤ 50 % of specified value) | | 2 years from manufacturing date Temp. below 45 °C Recommend every 6 month to charge V _R from manufacturing date (C ≤ 10 % of initial value / ESR ≤ 50 % of specified value) |

Measurement of Capacitance & ESR

Capacitance (F)

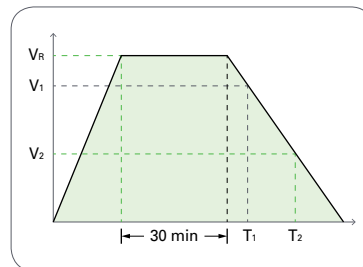

$$C(F) = I \times \frac{(T_2 - T_1)}{(V_1 - V_2)}$$

| | |
|----------------------|------------------------------------|
| V_R | Rated Voltage |
| V₂ | 0.8 V _R |
| V₁ | 0.4 V _R |
| I | Discharge Current (1 mA per Farad) |

DC ESR(Rd) is calculated by voltage drop (ΔV) which is measured by the period of time from discharge start to 10 milli - seconds later.

Equivalent Series Resistance (ESR)

AC ESR is measured by 4 - probe impedance analyzer.

* Condition : Potentiostat mode, AC amplitude : 5 mV, Frequency : 1 kHz

VPC Measurement of Capacitance

C : Discharge capacitance (F)

I : Discharge Current (A)


T₁ : time (s) from discharge start to reach U_R

T₂ : time (s) from discharge start to reach U_L

T_{cy} : Constant Voltage charging time: 30min)

U_L : Rated lower limit voltage (V), U₂, at equation

U_R : Rated voltage (V), U₁ at equation

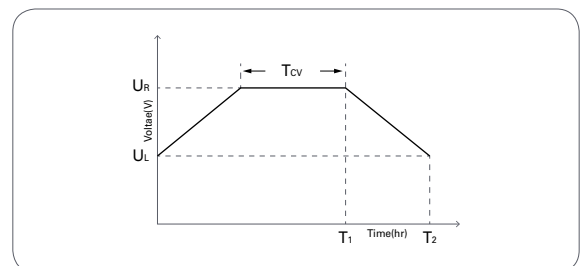

* Module specification for 2 series cells has identical characteristics to above items.

* All test data in this catalogue follow IEC guidelines and VINATech use 25c for all tests unless otherwise stated.

* Visit our Web site for our new Capacitor Calculator.

* Please contact us hycap@vina.co.kr if you need detailed datasheets and customization.



Supercapacitor

SINGLE CELL / LEAD TERMINAL TYPE


VINATech R&D team has developed the EDLC technologies in both 2.7 V and 3.0 V radial series to overcome the increasing challenges being faced by customers when finished products are installed in extreme conditions in areas of high temperature and high humidity. The challenging conditions are over and above recommended specifications for standard EDLC.



Features

- High Power Density
- Over 500,000 cycle life (semi-permanent)
- RoHS/WEEE/REACH compliant
- Long - term reliability improved for extreme condition
- Short term peak power assist application

Drawing

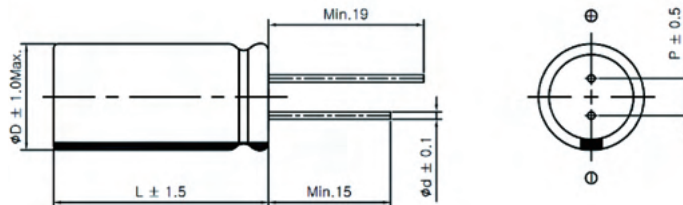

| | | | | | |
|---------------|-----|-----|----|-----|----|
| D (Ø) | 8 | 10 | 13 | 16 | 18 |
| d (Ø) | 0.6 | | | 0.8 | |
| P (mm) | 3.5 | 5.0 | | 7.5 | |

| Part Number | Rated Voltage | Capacitance | ESR (mΩ) | | Max. Current | Leakage Current (mA, 72 hr) | | Size (mm) | Weight (g) | Volume (ml) |
|-------------|-------------------|-------------|----------|------------|--------------|-----------------------------|-----------|-----------|------------|-------------|
| | (V _R) | | (F) | AC (1 kHz) | | DC | (@ 2.7 V) | | | |
| WEC3R0105QG | 3.0 | 1 | 145 | 215 | 1.2 | 0.002 | 0.003 | 08 × 13 | 1.1 | 0.7 |
| WEC3R0155QG | | 1.5 | 115 | 175 | 1.5 | 0.003 | 0.005 | 08 × 20 | 1.4 | 1.0 |
| WEC3R0335QG | | 3.3 | 75 | 125 | 3.5 | 0.007 | 0.010 | 08 × 20 | 1.5 | 1.0 |
| WEC3R0505QD | | 5 | 50 | 85 | 5.0 | 0.010 | 0.015 | 08 × 25 | 1.8 | 1.3 |
| WEC3R0505QG | | 5 | 80 | 120 | 4.5 | 0.010 | 0.015 | 10 × 20 | 2.1 | 1.6 |
| WEC3R0705QD | | 7 | 45 | 75 | 6.5 | 0.014 | 0.021 | 08 × 30 | 2.2 | 1.5 |
| WEC3R0705QG | | 7 | 80 | 135 | 5.0 | 0.014 | 0.021 | 10 × 20 | 2.2 | 1.6 |
| WEC3R0106QA | | 10 | 45 | 75 | 8.5 | 0.020 | 0.030 | 10 × 25 | 2.6 | 2.0 |
| WEC3R0106QG | | 10 | 30 | 45 | 10.0 | 0.020 | 0.030 | 10 × 30 | 3.2 | 2.4 |
| WEC3R0106QD | | 10 | 50 | 75 | 8.5 | 0.020 | 0.030 | 13 × 20 | 3.4 | 2.7 |
| WEC3R0156QG | | 15 | 37 | 55 | 12.0 | 0.030 | 0.045 | 13 × 25 | 4.5 | 3.3 |
| WEC3R0186QC | | 18 | 30 | 50 | 14.0 | 0.036 | 0.054 | 13 × 25 | 4.8 | 3.3 |
| WEC3R0256QG | | 25 | 20 | 30 | 21.0 | 0.050 | 0.075 | 16 × 25 | 7.2 | 5.0 |
| WEC3R0506QG | | 50 | 13 | 20 | 37.0 | 0.100 | 0.150 | 18 × 40 | 12.5 | 10.2 |
| WEC3R0606QG | | 60 | 13 | 20 | 40.0 | 0.120 | 0.180 | 18 × 40 | 13.5 | 10.2 |
| WEC3R0107QD | | 100 | 12 | 20 | 50.0 | 0.200 | 0.300 | 18 × 59 | 17.5 | 15.0 |


* Max. Current : 1 sec. discharge to 1/2 V_R
 * Connecting a module more than 2 series, please fully discharge over 1 hour first, then assemble right after within 1 hour
 * N.B. VEC lead terminal series is not for New Designs
 * Taping versions available for volume orders 8 mm, 10 mm & 13 mm diameter products Also pre bending available
 * For 2.7 V and 5.4 V VEC EDLC, not recommended for new design




Supercapacitor MODULE IN 2 SERIES

Features

- High Power Density
- Over 500,000 cycle life (Semi-permanent)
- 2 units serially connected to products
- RoHS/WEEE/REACH compliant
- Long term reliability improved for extreme condition

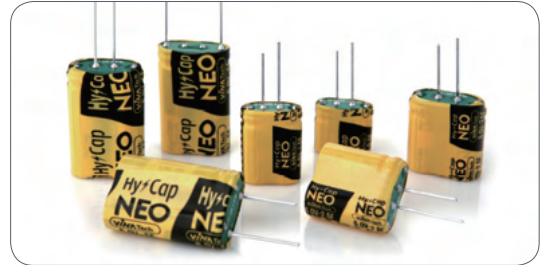

Drawing

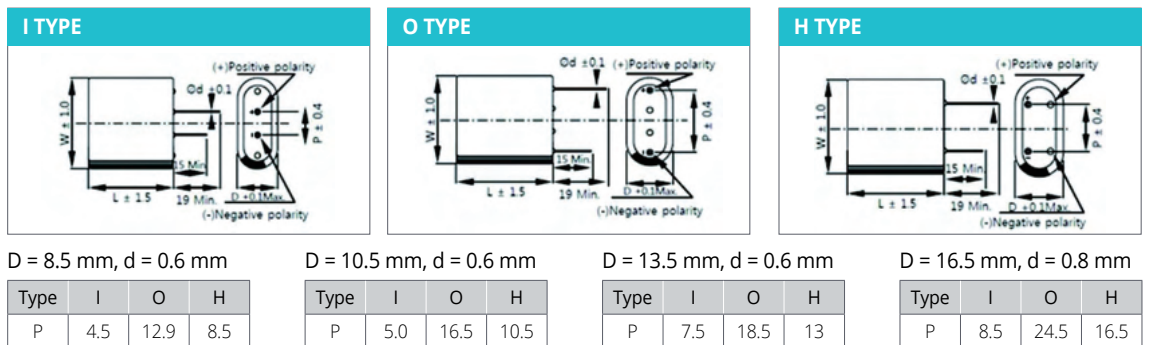

| Item | Characteristic | |
|----------------------------|---|---|
| Product series | EDLC 2 Serial Module | |
| Rated Voltage (V_R) | 6.0 V | |
| Operating Temperature | -40°C ~ +65 °C (85 °C when de-rated) | |
| Capacitance Tolerance | -10 % ~ +30 % | |
| High Temp. Load Life | After 1,000 hours at V_R loaded under +65 °C, capacitor meet the following criteria. | |
| | Capacitance Change | ≤ 30 % of initial value |
| | ESR | ≤ 2 times of specified value |
| Cycle Life Characteristics | Cycle | Over 500,000 |
| | ΔC | ≤ 30 % of initial value |
| | ESR | ≤ 2 times of specified value |
| | Method | Cycle of Charge/discharge from V_R to $1/2 V_R$ |
| Shelf life | 3 years No Electrical Charge & Temp. below 25 °C (ΔC : ≤ 10 % of initial value / ΔESR : ≤ 50 % of specified value) | |

| Part Number | Rated Voltage | Capacitance (F) | ESR (mΩ) | | Max. Current (A) | Leakage Current (mA, 72 hr) | | Size (mm) D x W x L | Weight (g) | Volume (ml) |
|-------------|---------------|-----------------|------------|-----|------------------|-----------------------------|-----------|---------------------|------------|-------------|
| | (V_R) | | AC (1 kHz) | DC | | (@ 5.4 V) | (@ 6.0 V) | | | |
| WEC6R0504QG | 6.0 | 0.5 | 295 | 435 | 1.2 | 0.002 | 0.003 | 8.5 x 17 x 15.5 | 2.5 | 2.2 |
| WEC6R0155QG | | 1.5 | 155 | 255 | 3.5 | 0.007 | 0.010 | 8.5 x 17 x 22 | 3.3 | 2.8 |
| WEC6R0255QG | | 2.5 | 165 | 245 | 4.5 | 0.010 | 0.015 | 10.5 x 21 x 22.5 | 4.7 | 4.4 |
| WEC6R0355QG | | 3.5 | 165 | 275 | 5.5 | 0.014 | 0.021 | 10.5 x 21 x 22.5 | 4.7 | 4.4 |
| WEC6R0505QA | | 5.0 | 95 | 155 | 8.5 | 0.020 | 0.030 | 10.5 x 21 x 27 | 6.6 | 6.3 |
| WEC6R0505QG | | 5.0 | 65 | 95 | 10.0 | 0.020 | 0.030 | 10.5 x 21 x 32 | 6.6 | 7.1 |
| WEC6R0755QG | | 7.5 | 79 | 115 | 12.0 | 0.030 | 0.045 | 13 x 26 x 28 | 9.6 | 9.5 |
| WEC6R0126QG | | 12.5 | 45 | 65 | 21.0 | 0.050 | 0.075 | 16.5 x 32.5 x 28 | 17.2 | 17.7 |

* Max Current : 1sec. discharge to $1/2 V_R$
 * When connecting more than 2 series, please fully discharge over 1 hour first, then assemble right after within 1 hour
 * For 5.4 V or VEC series, please contact the sales office (VEC and 5.4 V is not recommended for new design)
 * For 3 Series (9V) modules, contact the sales office



Supercapacitor


SINGLE CELL / SNAP-IN TYPE

Features

- High Power Density Low ESR
- Over 500,000 cycle life (Semi - permanent)
- RoHS/WEEE/REACH compliant



Drawing

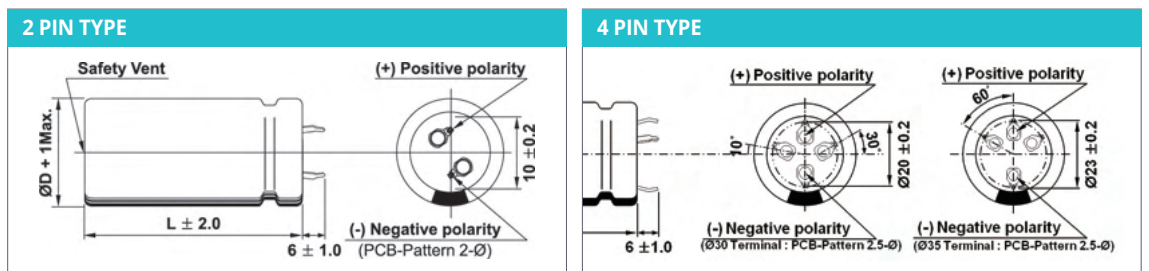

| | | | | | |
|---------------|----|----|----|----|----|
| D (Ø) | 22 | 25 | 35 | | |
| P (mm) | 45 | 70 | 62 | 72 | 82 |

| Item | Characteristic | |
|----------------------------|---|---|
| Product series | EDLC | |
| Rated Voltage (V_R) | 3.0 V | |
| Operating Temperature | -40 °C ~ +65 °C (85 °C when de - rated) | |
| Capacitance Tolerance | -10 % ~ +30 % | |
| High Temp. Load Life | After 1,000 hours at V_R loaded under + 65 °C, capacitor meet the following criteria. | |
| | Capacitance Change | ≤ 30 % of initial value |
| | ESR | ≤ 2 times of specified value |
| Cycle Life Characteristics | Cycle | Over 500,000 |
| | ΔC | ≤ 30 % of initial value |
| | ESR | ≤ 2 times of specified value |
| | Method | Cycle of Charge/discharge from V_R to 1/2 V_R |
| Shelf life | 3 years No Electrical Charge & Temp. below 25 °C (ΔC : ≤ 10 % of initial value / ΔESR : ≤ 50 % of specified value) | |

| Part Number | Rated Voltage | Capacitance | ESR (mΩ) | | Max. Current | Leakage Current (mA, 72 hr) | Size (mm) | Weight (g) | Volume (ml) |
|-------------|---------------|-------------|----------|------------|--------------|-----------------------------|-----------|------------|-------------|
| | (V_R) | | (F) | AC (1 kHz) | | | DC | | |
| VEC3R0107QG | 3.0 | 100 | 6.0 | 9.0 | 78 | 0.300 | 22 x 45 | 20.0 | 17.1 |
| VEC3R0227QG | | 220 | 5.0 | 7.5 | 125 | 0.660 | 25 x 70 | 38.0 | 34.3 |
| VEC3R0367QG | | 360 | 3.0 | 3.2 | 250 | 1.080 | 35 x 62 | 70.0 | 59.6 |
| VEC3R0387QG | | 380 | 3.0 | 3.2 | 257 | 1.140 | 35 x 62 | 70.0 | 59.6 |
| VEC3R0407QG | | 400 | 3.0 | 3.2 | 263 | 1.200 | 35 x 72 | 80.0 | 69.2 |
| VEC3R0507QG | | 500 | 3.0 | 3.2 | 288 | 1.500 | 35 x 82 | 96.0 | 78.9 |

* Max. Current : 1 sec. discharge to 1/2 V_R
 * VEC 2.7V Snap-in type is not recommended for new design




Supercapacitor

VET TO COMBAT EXTREME CONDITIONS


Due to the characteristics of electrolytes, there were many difficulties and limitations in improving the high-temperature characteristics of supercapacitors in the past. However now the R&D Team at VINATech have developed a new supercapacitor solution of NEO VET Series which will be particularly ideal for all IoT and AMI applications.

Features

- VET series of +85 °C Single cell 2.7 V Supercapacitor
- Over 500,000 cycle life (semi-permanent)
- RoHS compliant
- High Power Density
- Short - term Peak Power assist applications
- Long - term reliability improved at high temperature 85 °C and humidity of 85 % RH

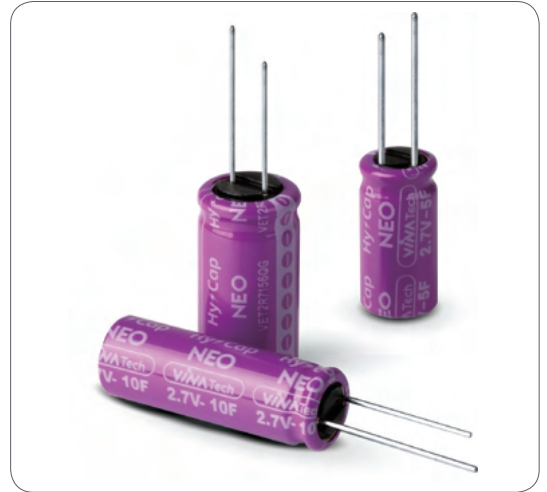

Drawing

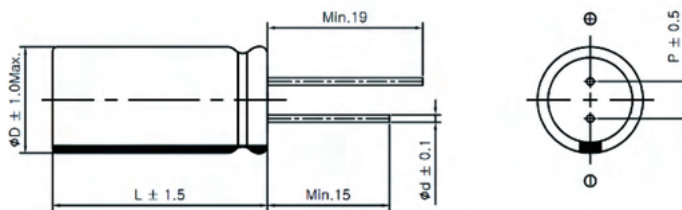

| | | | | | |
|---------------|-----|-----|----|----|----|
| D (Ø) | 8 | 10 | 13 | | |
| L (mm) | 20 | 20 | 30 | 40 | 25 |
| d (Ø) | 0.7 | | | | |
| P (mm) | 3.5 | 5.0 | | | |

| Item | Characteristic | |
|--|---|---|
| Rated Voltage (V_R) | 2.7 V | |
| Operating Temperature | -40 °C ~ +85 °C | |
| Capacitance Tolerance | -10 % ~ +30 % | |
| High Temp. High Humidity Load Life | After 1,000 hours at V_R loaded under +85 °C, 85 % RH Humidity, capacitor meet the following criteria. | |
| | Capacitance Change | ≤ 30 % of initial value |
| | ESR | ≤ 3 times of specified value |
| Cycle Life Characteristics | Cycle | Over 500,000 |
| | ΔC | ≤ 30 % of initial value |
| | ESR | ≤ 3 times of specified value |
| | Method | Cycle of Charge/discharge from V_R to $1/2 V_R$ |
| Shelf life | 3 years No Electrical Charge & Temp. below 25 °C (ΔC : ≤ 10 % of initial value / ΔESR : ≤ 50 % of specified value) | |

* Max. Current : 1 sec. discharge to $1/2 V_R$

* Note : The products are tested based on the test conditions and methods defined

| Part Number | Rated Voltage (V_R) | Rated Capacitance (F) | ESRAC (mΩ) | ESRDC (mΩ) | Max Current (A) | Leakage Current (mA) | Size (mm) | Weight (g) |
|-------------|-------------------------|-----------------------|---------------|-----------------|-----------------|----------------------|-----------|------------|
| | Surge Voltage (3.0 V) | @ 25 °C | @ 25 °C 1 kHz | @ 25 °C 10 msec | @ 25 °C | @ 25 °C | D × L | |
| VET2R7335QG | 2.7 | 3.3 | 140 | 210 | 2.5 | 0.010 | 08 × 20 | 1.5 |
| VET2R7505QG | | 5 | 90 | 135 | 4 | 0.015 | 10 × 20 | 2.2 |
| VET2R7106QG | | 10 | 50 | 75 | 7.5 | 0.030 | 10 × 30 | 3.2 |
| VET2R7156QD | | 15 | 40 | 60 | 10.5 | 0.040 | 10 × 40 | 4.3 |
| VET2R7156QG | | 15 | 40 | 60 | 10.5 | 0.040 | 13 × 25 | 4.5 |

* For purchasing modules, please contact hycap@vina.co.kr.



Supercapacitor

VPC VINA PULSE CAPACITOR


New powerful VPC series offer High Energy Density, ultra low Leakage Current, low ESR and high energy from a new miniaturised Lithium Capacitor development. VINATech has responded to market requests with 30F capacitance in 08 x 20 can, 100F, 150F and 250F family products. Ideally suited to supporting Battery powered products and IoT applications.

Features

- Ultra Low Self Discharge
- High Operating Voltage
- High Energy Density
- High Capacitance
- Wide Operating Temperature Range



Drawing

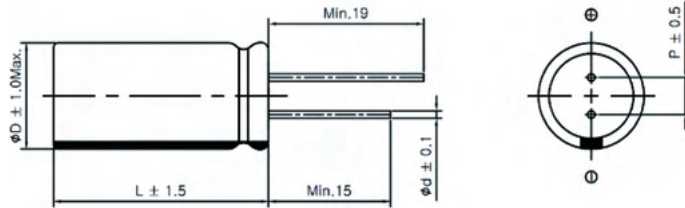

| | | | | |
|--------|-----|-----|----|----|
| D (Ø) | 8 | 10 | 13 | 13 |
| L (mm) | 20 | 30 | 25 | 35 |
| d (Ø) | 0.8 | | | |
| P (mm) | 3.5 | 5.0 | | |

| Item | Spec. value | Test methods |
|---------------------------------|--|--|
| Operating Voltage Range | 2.5 V to 3.8 V (2.5 V to 3.5 V @ 85 °C) | |
| Operating Temp. Range | -25 °C ~ 85 °C (-40 °C ~ 85 °C @ in Li/SOCL ₂ battery system) | |
| Load Life @ 70 °C | Capacitance : ≤ 30 % of initial value ESR : ≤ 2 times of specified value Appearance : No abnormality | - Temperature : 70 ± 2 °C, 85 ± 2 °C - Time : 1,000 hours - Voltage : 3.8 V, 3.5 V and measure the floating charge characteristics after returning to normal temperature and humidity. |
| Load Life @ 85 °C | | |
| Heat cycle characteristics | | - Temperature : 85 ± 2 °C, -40 ± 2 °C - Duration : 30 min - Cycle Numbers : 100 cycles |
| Cycle Life | | - Temperature : 25 ± 2 °C - Cycle Number : 50,000 - Discharge Current : 20 C - rate - Cut-off Voltage : 2.5 V (DOD 100 %) |
| Low Temperature characteristics | Capacitance : ≤ 50 % of initial value ESR : Less than 20 times of specified spec. | The specification shall be met lower category temperature range of -25 °C |

#1 Reference IEC62813 4.2
#2 1sec. Discharge to 3.2 V

| Part Number | Rated Voltage (V _R) | Rated Capacitance (F) | ESRAC (mΩ) | ESRDC (mΩ) | Leakage Current (µA) | Self Discharge (V) | Rated Current (A) | Pulse Current (A) | Weight (g) | Energy Density (Wh/kg) | Capacity (Ah/kg) |
|----------------|---------------------------------|-----------------------|---------------|------------------|----------------------|--------------------|-------------------|-------------------|------------|------------------------|------------------|
| | Surge Voltage (4.0 V) | @ 25 °C #1 | @ 25 °C 1 kHz | @ 25 °C 100 msec | @ 25 °C 72 hr | @ 25 °C #1 | @ 25 °C | @ 25 °C #2 | | | |
| VEL08203R8306G | 3.8 | 30 | 350 | 700 | 1 | -3 % | 0.15 | 0.5 | 1.9 | 17.961 | 5.702 |
| VEL10303R8107G | | 100 | 100 | 200 | 2 | | 0.4 | 2.0 | 4.2 | 27.083 | 8.598 |
| VEL13253R8157G | | 150 | 70 | 140 | 3 | | 0.5 | 3.0 | 6.2 | 27.520 | 8.737 |
| VEL13353R8257G | | 250 | 50 | 100 | 5 | | 0.75 | 5.0 | 8.2 | 34.680 | 11.009 |

* Energy Density (Wh) : $[0.5 \times C \times \{(V_{rated}^2) - (V_{min}^2)\}] / 3600$
* Capacity (Ah) : $[C \times (V_{rated} - V_{min})] / 3600$



Supercapacitor USER GUIDANCE

01

Do not take the product apart or damage at random. Follow guidelines for product installation (Soldering, pin formation etc.) Warranty will not be provided if damage resulting from a failure to follow installation guidelines.

02

Polarity

+ This is a polarised product (+positive and -negative poles) so it must be used accordingly. The negative pole is clearly marked on the product sleeve.

03

Overvoltage and overcurrent


- + It is recommended that the product should be used below the rated voltage. When used over the rated voltage, it could lead to vent expansion and failure, the useful life span will be shortened.
- + In case of connecting more than 2 units for modules, we recommend lowering the operating voltage per cell by a minimum of 10 % from the rated voltage to ensure safer voltage balancing (e.g. 2.43 V per unit in case of 2.7 V series).
- + It is recommended that the product should be applied below the maximum current. When used above the maximum current, it will lead to can expansion and failure or its life span will be shortened.

04


Working conditions and storage

- + Working life of this product will be shortened by the working environmental conditions, such as temperature, humidity and air pressure among others.
- + Do keep the product within environmental conditions that are recommended in this document. Check with the sales office.
- + Do not expose the product to over 75 % relative humidity. When exposed for a long time, its life can be shortened or it can cause malfunction.
- + Do not use or keep the product in the temperature range that is higher than recommended in this document. Its life will be shortened or it can cause malfunction.
- + Do not use or keep the product in highly corrosive atmospheres that is composed of substances (for example, the environment that is exposed to halogen substances, such as Cl, F, or halogen compounds, nitrogen substances or nitrogen compounds, sulphur substances or sulphur compounds, hexavalent chrome, arsenic, and, etc.).

EDLC Lead Terminal Bending Process

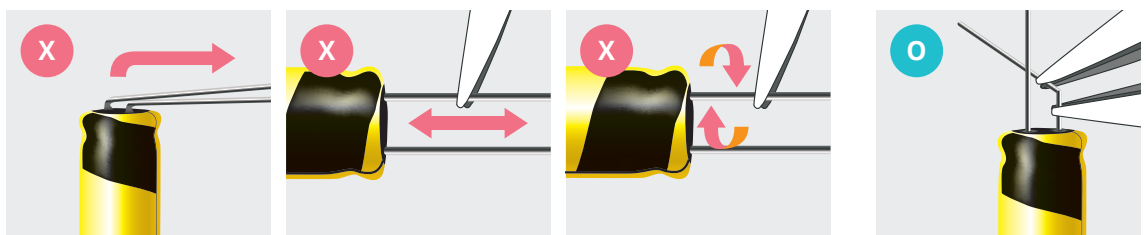

VPC Handling Instructions

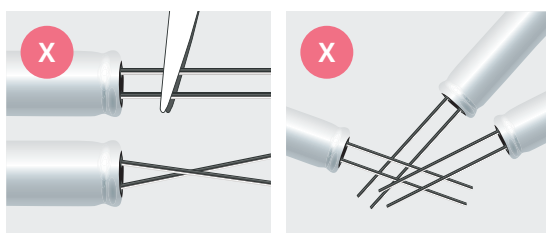

* Product head and fire may occur due to incorrect product storage, product measurement and processing.




Supercapacitor MODULE CUSTOMIZED SERIES

Features

- Ultra - low internal resistance
- High - power and reliable performance
- Over 500,000 duty cycles
- Compact & fully enclosed splash proof design

Applications

- Automotive
- AGV/Robotics
- Consumer electronics
- Renewable energy system
- Short term UPS & Telecommunications
- Wind turbine pitch control

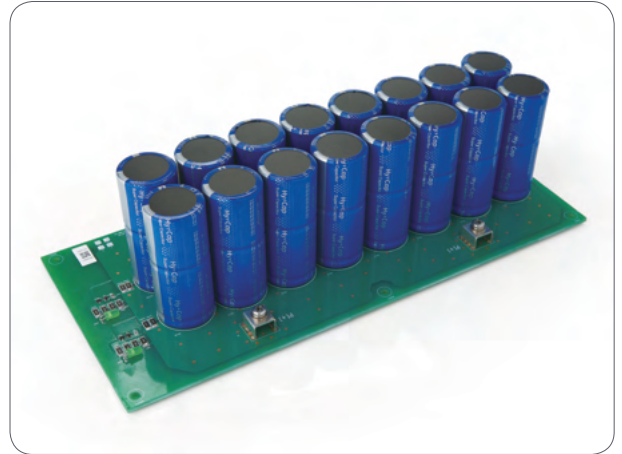

| Item | Characteristic | |
|----------------------------|--|---|
| Product series | EDLC Customized Series Module | |
| Operating Temperature | -40 °C ~ +65 °C (85 °C when de - rated) | |
| Capacitance Tolerance | -10 % ~ +30 % | |
| High Temp. Load Life | After 1,000 hours at V_R loaded under +65 °C, capacitor meet the following criteria. | |
| | Capacitance Change | ≤ 30 % of initial value |
| | ESR | ≤ 2 times of specified value |
| Cycle Life Characteristics | Cycle | Over 500,000 |
| | ΔC | ≤ 30 % of initial value |
| | ESR | ≤ 2 times of specified value |
| | Method | Cycle of Charge/discharge from V_R to $1/2 V_R$ |
| Shelf life | 3 years No Electrical Charge & Temp. below 25 °C (ΔC : ≤ 10 % of initial value / ΔESR : ≤ 50 % of specified value) | |

| Part Number | Rated voltage (V) | Capacitance (F) | DCESR (mΩ) | Cell Structure | Size(mm) (W x L x H) | Weight (kg) | Energy density (Wh/kg) | Power density (W/kg) |
|---------------|-------------------|-----------------|------------|------------------|----------------------|-------------|------------------------|----------------------|
| VEM30R0366QG | 30 | 36 | 55 | 3.0V - 360F 10S | 122 x 150 x 70 | 0.85 | 5.3 | 2,310 |
| VEM30R0106QG | 30 | 10 | 95 | 3.0V - 100F 10S | 160 x 60 x 50 | 0.35 | 3.6 | 3,248 |
| VEM60R0505QG | 60 | 5 | 180 | 3.0V - 100F 20S | 146 x 104 x 70 | 0.45 | 5.6 | 5,333 |
| VEM18R0606QG | 18 | 60 | 20 | 3.0V - 360F 6S | 37 x 233 x 70 | 0.67 | 3.2 | 2,293 |
| VEM144R0755QG | 144 | 7.5 | 165 | 3.0V - 360F 48S | 315 x 340 x 70 | 4 | 5.4 | 3,770 |
| VEM18R0127QG | 18 | 120 | 19 | 3.0V - 360F 6S2P | 270 x 100 x 70 | 1 | 5.4 | 2,046 |
| VEM90R0166QG | 90 | 16.6 | 145 | 3.0V - 500F 30S | 400 x 200 x 90 | 3.5 | 5.3 | 1,915 |



Supercapacitor

UNDER DEVELOPMENT (Samples Available)

Single Cell / Lead Terminal Type

| Part Number | Rated Voltage (V _R) | Capacitance (F) | Size (mm) D X L |
|-----------------------|---------------------------------|-----------------|-----------------|
| WEC3R0105QD | 3.0 | 1 | 06 x 12 |
| VEC3R0205QD | 3.0 | 2 | 05 x 25 |
| VEP3R0106QG (Low ESR) | 3.0 | 10 | 10 x 30 |

Single Cell / Snap-In Type

| Part Number | Rated Voltage (V _R) | Capacitance (F) | Size (mm) D X L |
|-------------|---------------------------------|-----------------|-----------------|
| VEC3R0287QG | 3.0 | 280 | 30 x 60 |
| VEC3R0487QG | 3.0 | 480 | 35 x 71 |

VPC (Vina Pulse Capacitor)

| Part Number | Rated Voltage (V _R) | Capacitance (F) | Size (mm) D X L |
|----------------|---------------------------------|-----------------|-----------------|
| VEL13203R8107D | 3.8 | 100 | 13 x 20 |
| VEL10403R8157D | 3.8 | 150 | 10 x 40 |
| VEL13463R8357G | 3.8 | 350 | 13 x 46 |
| VEL18403R8607G | 3.8 | 600 | 18 x 40 |
| VEL18653R8128G | 3.8 | 1200 | 18 x 65 |
| VEL35623R8358G | 3.8 | 3500 | 35 x 62 |

VEL35623R8358G Samples Available date : 1Q. 2022

Module Customized Series

| Part Number | Rated Voltage (V _R) | Capacitance (F) | DCESR (mΩ) | Cell Structure | Weight (kg) | Energy density (Wh/kg) | Power density (W/kg) |
|---------------|---------------------------------|-----------------|------------|-----------------|-------------|------------------------|----------------------|
| VEM180R0605QG | 180 | 6 | 280 | 3.0V - 360F 60S | 5 | 5.4 | 2,777 |

Samples Available date : Jan. 2022


LIC Pouch Type

| Part Number | Rated Voltage (V _R) | Capacitance (F) | Size (mm) A X C |
|-------------|---------------------------------|-----------------|-----------------|
| Not fixed | 3.8 | 3,200 | 153 x 122 |

Samples Available date : Mar. 2022



Supercapacitor DEVELOPMENT ROADMAP

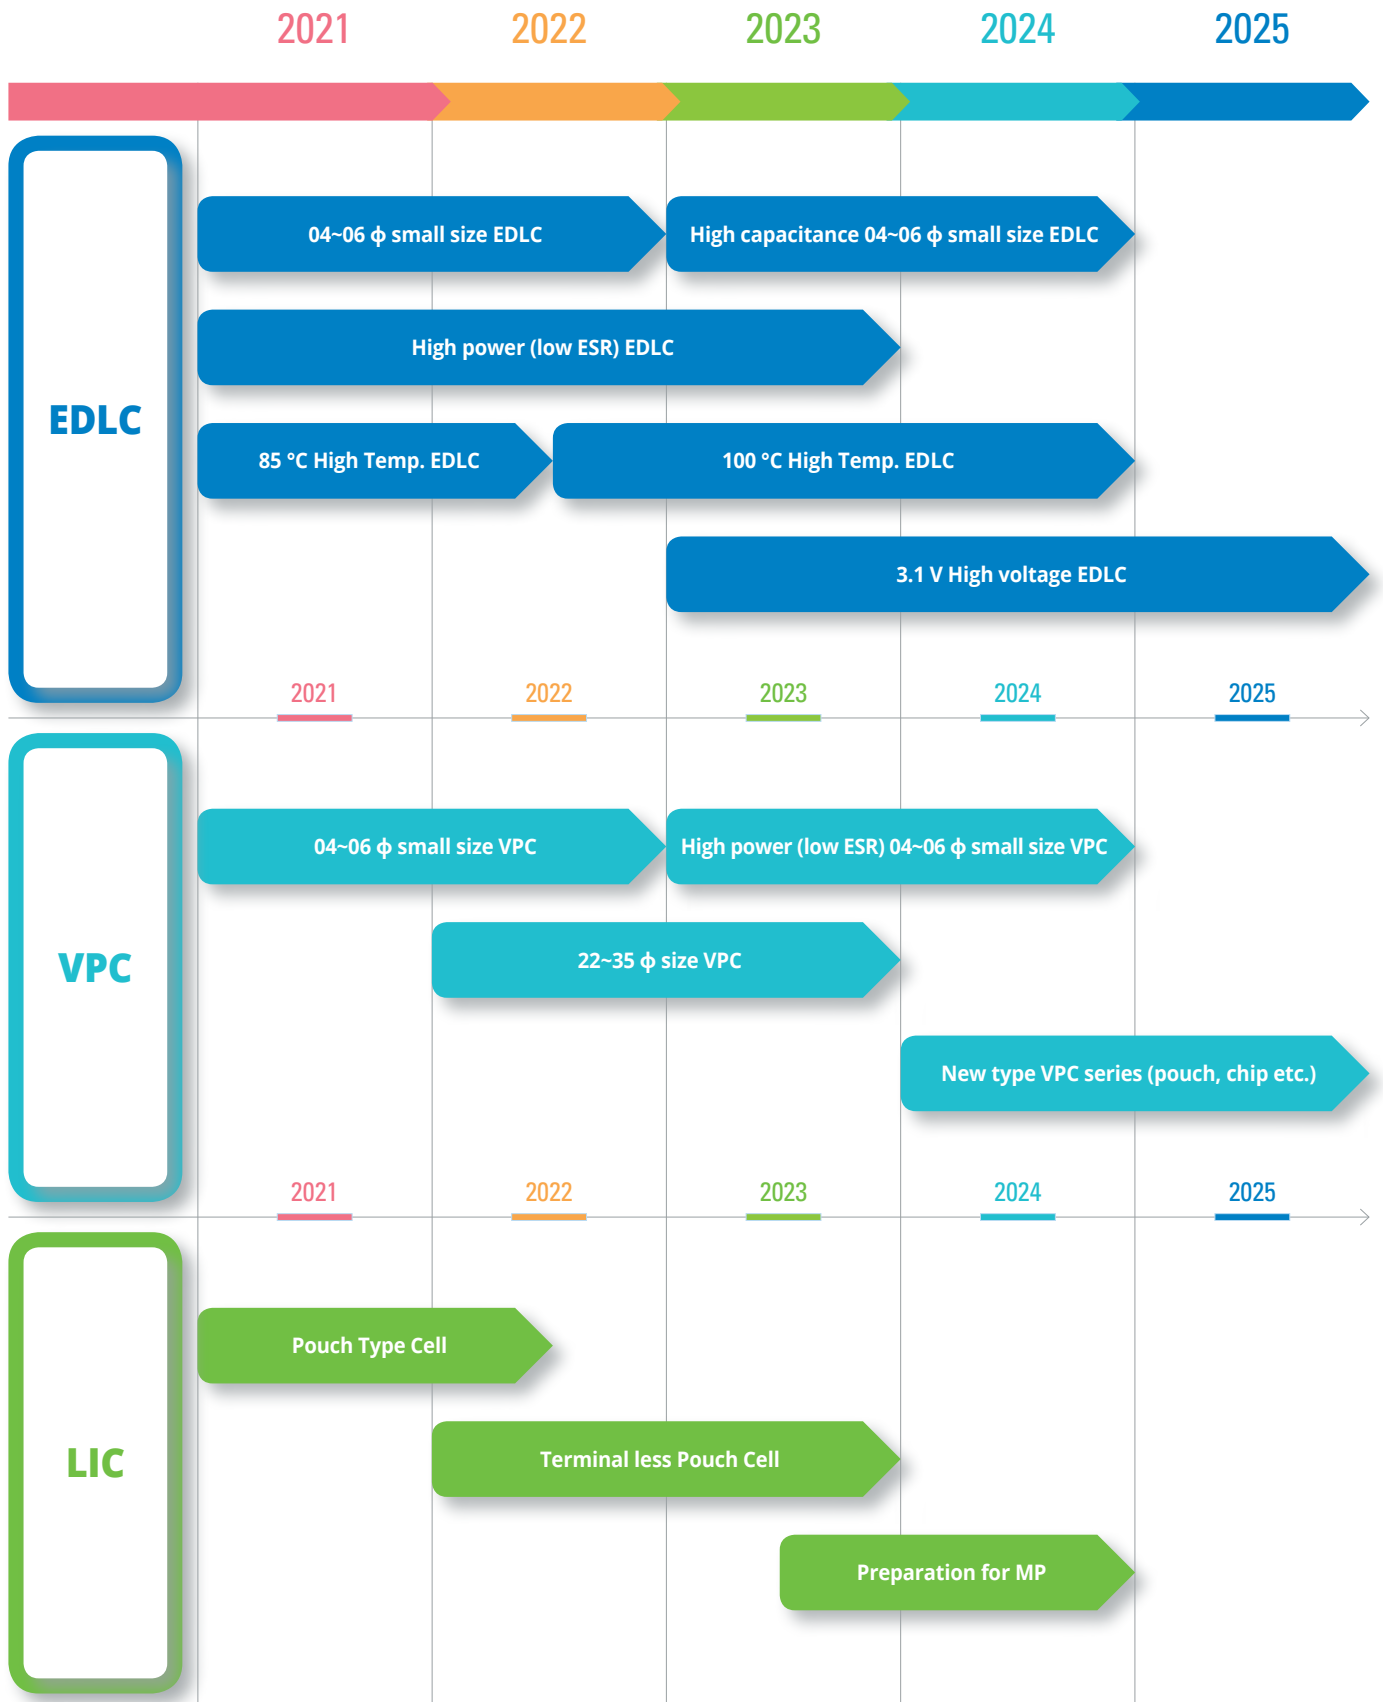

ABOUT VINATech



Leading manufacturer of Supercapacitor and Fuel Cell Component



ABOUT VINATech

Leading manufacturer of Supercapacitor
Comprehensive producer of Fuel Cell Component

VINATech endeavour to fulfil the happiness of our customers, employees and shareholders as well as our society, by offering environment friendly products.

VINATech is the leading Supercapacitor manufacturer and provides the energy saving device including Supercapacitor and Lithium Capacitor. VINATech provides Fuel Cell Component including Carbon support, Pt/C Catalyst, and Membrane Electrode Assembly (MEA) comprehensively with securing Carbon technology which VINATech have researched and developed for environment friendly future growth. It is applied as many as areas from Social Infrastructure for building Smart City to hydrogen fuel cell related area.

VINATech HISTORY

1999
START UP



1999 | Company Founded

2003 | Supercapacitor R&D started

2004 | Registered R&D center

2004 | Production of Supercapacitor started

2005
BUILD UP



2005 | Venture Company Grand Award

2006 | Selected as Promising Small Business Company

2008 | Best HRD Certification

2010 | 3V Supercapacitor Development

DISTRIBUTION & SUPERCAPACITOR BIZ.



R&D · MANUFACTURING TECHNOLOGY IMPROVEMENT



VINATech PROFILE

| | |
|----------------------------------|---|
| Company | VINATech Co., LTD. |
| Foundation | July 1999 |
| Head office & Factory | 15, Unam-ro, Deokjin-gu, Jeonju-si, Jeollabuk-do, Korea (postal code 54853) |
| Overseas Factory | Ha Lieu Hamlet, Phuong Lieu Commune, Que Vo District, Bac Ninh Province 16800 |
| Main Business | <ul style="list-style-type: none"> • Supercapacitor • Fuel Cell Component |

2011 JUMP UP

- 2011** | Relocate Headquarters (Gunpo → Jeonju)
- 2012** | Selected Global Small & Strong Business
- 2012** | Grand Prize Small Business IP Manager
- 2013** | KONEX Stock Market IPO
- 2013** | Start Carbon Materials Business (Fuel Cell, Environment Filter)
- 2014** | Awarded for IP - R&D from Korea IP Office
- 2016** | Selected 'Global Small Giant Company' from Industry Ministry

ENERGY STORAGE DEVICE EXPERT COMPANY



2017 GROW UP

- 2017** | 'VINATech VINA' established in Bac Ninh, Vietnam
- 2018** | Vietnam Factory Start operation
- 2018** | R&D Center built in HQ
- 2019** | Leading SME Award by Government of South Korea
- 2020** | KOSDAQ Stock Market IPO
- 2020** | Acquired Acecreation (Bipolar Plate)
- 2021** | Wanju factory (55,000 m²) Groundbreaking Ceremony

ENERGY STORAGE DEVICE LEADING COMPANY



VINA MISSION

Through the happiness of our members, we provide eco-friendly products and contribute to the building of a harmonious society



**MEMBER
SATISFACTION**

**ECO-FRIENDLY
PRODUCTS**

**HARMONIOUS
COMMUNITY**



HEADQUARTER (JEONJU FACTORY / R&D LAB)

15, Unam-ro, Deokjin-gu, Jeonju-si, Jeollabuk-do, Korea
(postal code 54853)
Tel | +82-63-715-3020

SALES OFFICE

AcroTower, B-607, Simin-daero 230, Dongan-gu,
Anyang-si, Gyeonggi-do, South Korea (postal code 14067)
Tel | +82-31-448-3066 E-mail | hycap@vina.co.kr



www.vinatech.com

Distribution
Partner



800.348.5580
630.208.2200



rellpower.com
rellpower@rell.com