

**Key Parameters**


V_{CE} = 1200V
 I_c = 200A

Features

- Low $V_{ce(sat)}$
- Fast switching
- High short circuit capability (10 μ s)
- Low inductance module structure

Applications

- Inverter for motor drive
- AC and DC servo drive amplifier
- UPS
- Soft switching welding machine

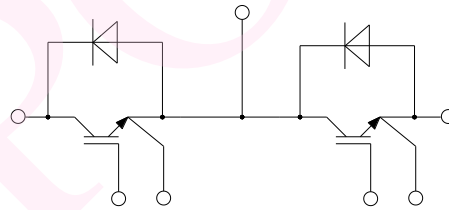

Equivalent Circuit Schematic

Prepared by : ABA

Date of Publication : 10.2022

Approved by :

Revision : 0

Diode Characteristics						
Symbol	Characteristic	Conditions	Value			Unit
			Min.	Typ.	Max.	
I_F	Diode DC Forward Current	$T_c=100^{\circ}\text{C}$, $T_j=150^{\circ}\text{C}$		200		A
I_{FRM}	Diode Peak Forward Current	$t_p=1\text{ms}$		400		A
V_F	Forward Voltage	$I_F=200\text{A}, T_{vj}=25^{\circ}\text{C}$		1.85	2.25	V
		$I_F=200\text{A}, T_{vj}=125^{\circ}\text{C}$		1.65		V
		$I_F=200\text{A}, T_{vj}=150^{\circ}\text{C}$		1.60		V
Q_{rr}	Recovered Charge	$I_F=200\text{ A}$		16.4		μC
I_{rr}	Peak Reverse Recovery Current	$V_R=600\text{V}$		113		A
E_{rec}	Reverse Recovery Energy	$-di_F/dt = 2116\text{A}/\mu\text{s}$ $T_{vj}=25^{\circ}\text{C}$		5.4		mJ
Module Characteristics						
Symbol	Characteristic	Conditions	Value			Unit
			Min.	Typ.	Max.	
V_{isol}	Isolation voltage	$t=1\text{min}, f=50\text{Hz}$	2500			V
T_{jmax}	Maximum Junction Temperature				175	$^{\circ}\text{C}$
$T_{vj op}$	Operating Junction Temperature		-40		150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature		-40		125	$^{\circ}\text{C}$
$R_{CC+EE'}$	Module lead resistance terminal to chip			0.70		$\text{m}\Omega$
L_{SCE}	Stray Inductance, Module			20		nH
$R_{\theta jc}$	Junction-to Case	per IGBT-inverter		0.12		$^{\circ}\text{C}/\text{W}$
		per Diode-inverter		0.18		$^{\circ}\text{C}/\text{W}$
$R_{\theta cs}$	Case to Sink	per IGBT-inverter		0.034		$^{\circ}\text{C}/\text{W}$
		per Diode-inverter		0.05		$^{\circ}\text{C}/\text{W}$
		Conductive grease applied		0.01		K/W
M_t	Module Electrodes Torque	Recommended(M6)	2.5		5.0	N·m
M_s	Module-to-Sink Torque	Recommended(M6)	3.0		6.0	N·m
G	Weight of Module			320		g
			Prepared by : ABA		Date of Publication : 10.2022	
			Approved by :		Revision : 0	

• Typical Electrical Characteristics

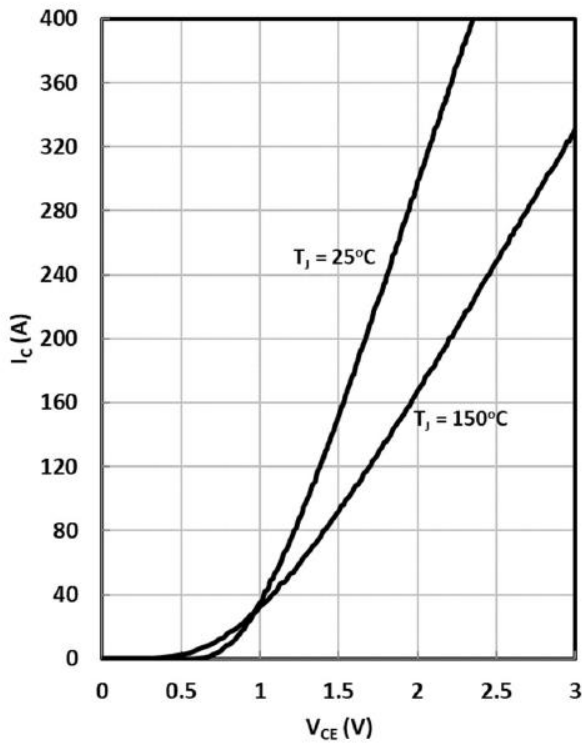


Fig. 1 IGBT (Inverter) Output Characteristics

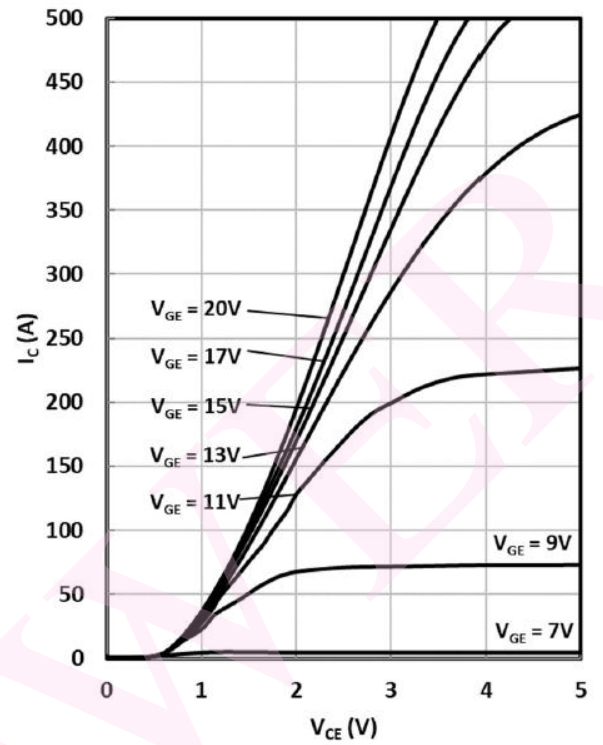


Fig. 2 IGBT (Inverter) Output Characteristics

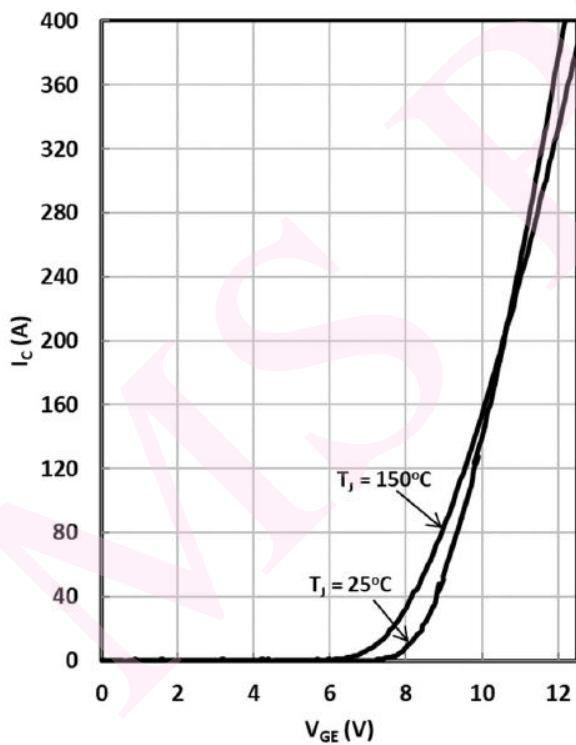


Fig. 3 IGBT (Inverter) Transfer Characteristics

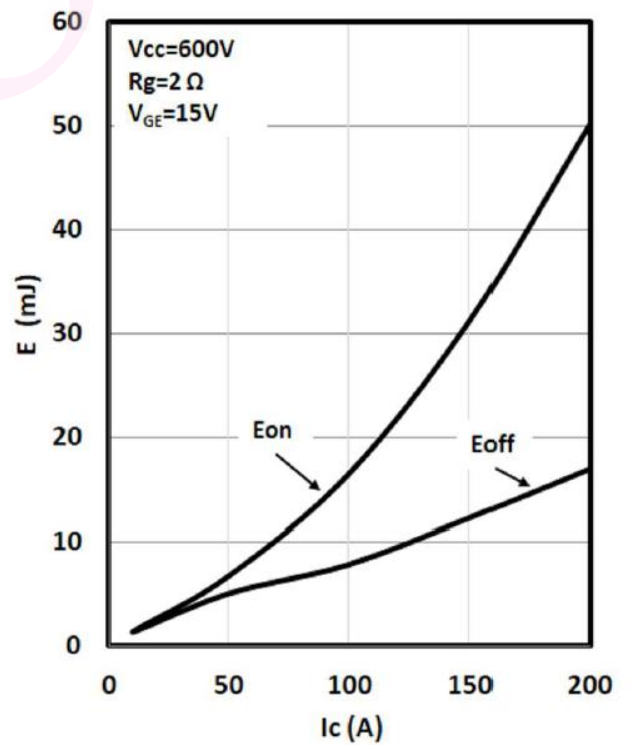


Fig. 4 IGBT (Inverter) Switching Loss vs. Ic

Prepared by : ABA	Date of Publication : 10.2022
Approved by :	Revision : 0

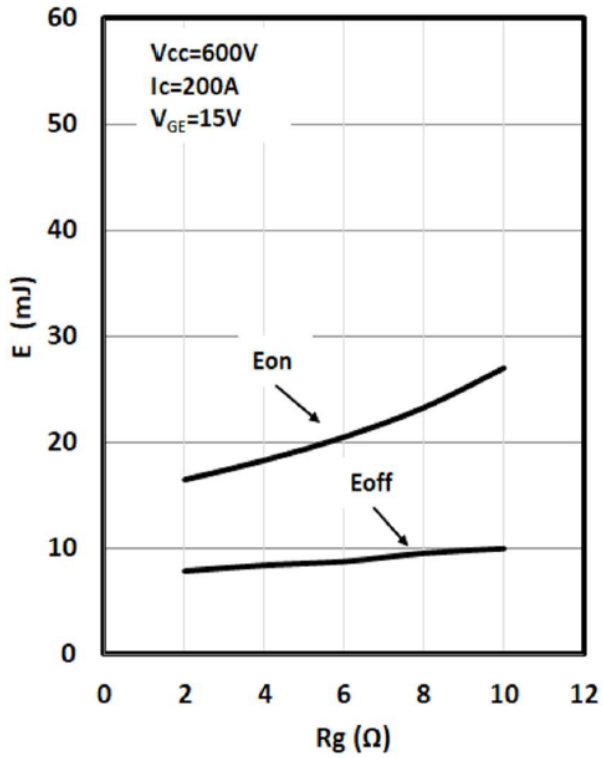


Fig. 5 IGBT (Inverter) Switching Loss vs. Rg

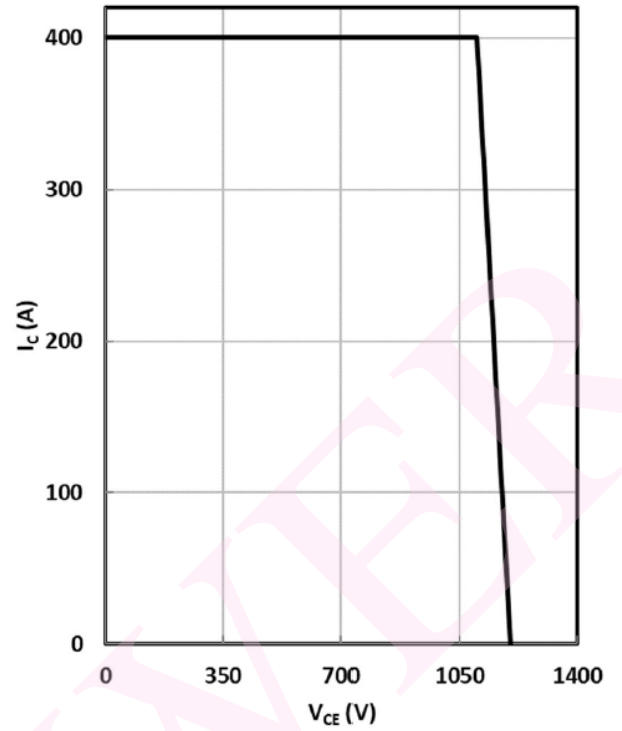


Fig. 6 RBSOA


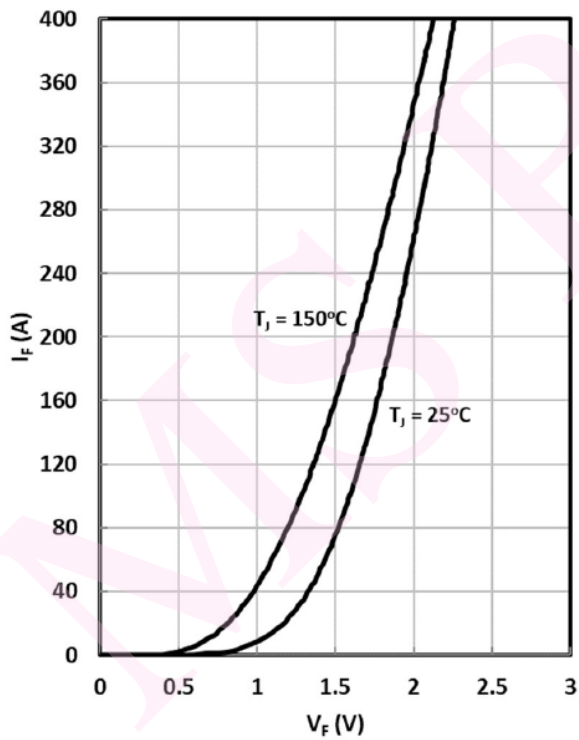


Fig. 7 Diode (Inverter) Forward Characteristics

Prepared by : ABA	Date of Publication : 10.2022
Approved by :	Revision : 0

Outline :

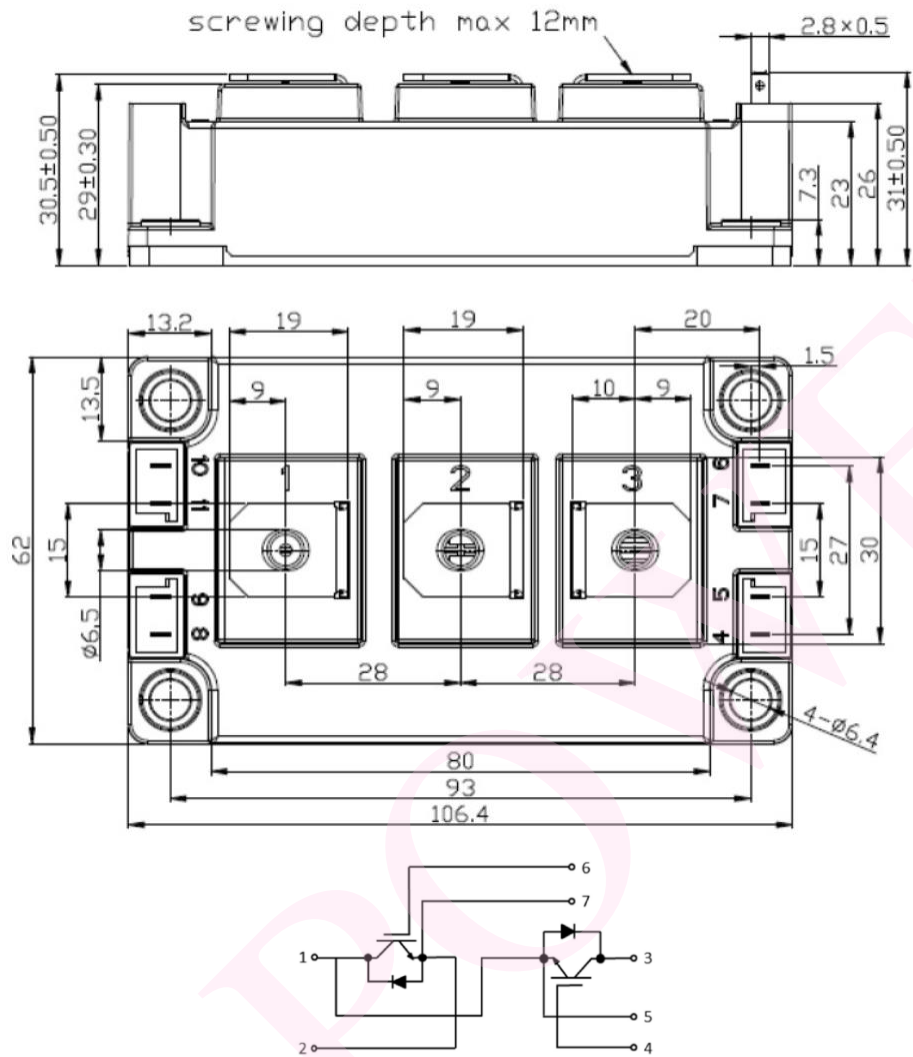

MS Power GmbH
 Mergenthalerallee 79-81
 65760 Eschborn, Germany
 Web: www.mspowergroup.com
 Mail: info@mspowergroup.de

Sales & Enquiry:
sales@mspowergroup.de

Technical Support:
solution@mspowergroup.de

After sales Service:
service@mspowergroup.de

Phone: +49 (0) 6196/7768 666
 Fax: +49 (0) 6196/7757 888



Prepared by : ABA	Date of Publication : 10.2022
Approved by :	Revision : 0