



Document	Document Number	Revision	Date
Spec Sheet	FCB100130A01	A	19-May-2020

## BPF

# P/N : FCB100130A01

### Contents

1. Electrical Specifications
2. Simulation Data
3. Mechanical specifications


Revision	Description	Date
A	Initial Release	19-May-2020

Document	Document Number	Revision	Date
Spec Sheet	FCB100130A01	A	19-May-2020

## 1. Electrical Specifications


Parameter	Specification	Simulation	Proposal
Center frequency	1150MHz		
Bandwidth	1000MHz~1300MHz		
Insertion Loss	1.0 dB max.	2.32	3.0dB max.
Ripple	1.0 dB max.	1.56	2.0dB max.
Group delay	10nsec /per 50MHz BW (30 -300MHz)	-	OK
Return Loss	1.2 : 1	20	OK
Attenuation	30dB min @ 10MHz - 950MHz	17.49	10.0dB min
	35dB min @ 1350MHz - 2500MHz	9.75	5.0dB min
	45dB min @ 2500MHz - 6000MHz	-	N/A
Temperature	-45°C ~ +85°C		
Input Output Impedance	50Ω		
Input power	5 avg. , 50 peak		
Foot print	10X10mm H=3mm		14x16.4x4.5 mm

## 2. Simulation Data

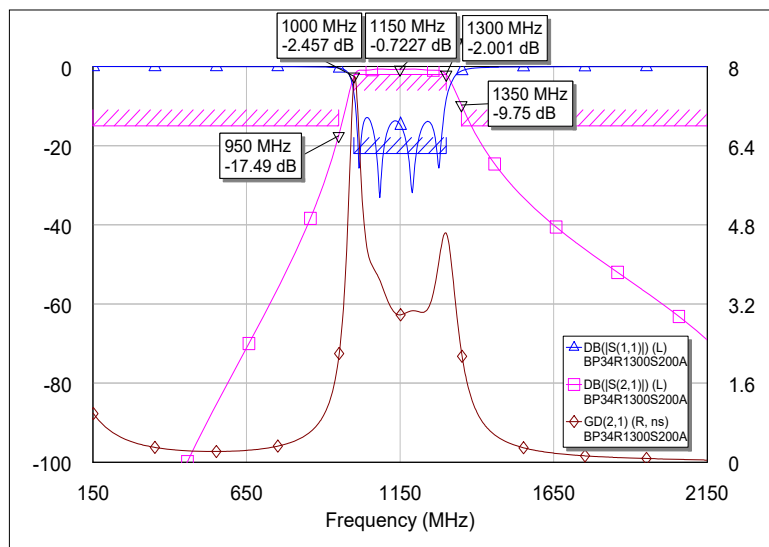

Document	Document Number	Revision	Date
Spec Sheet	FCB100130A01	A	19-May-2020

### 3. Mechanical specifications

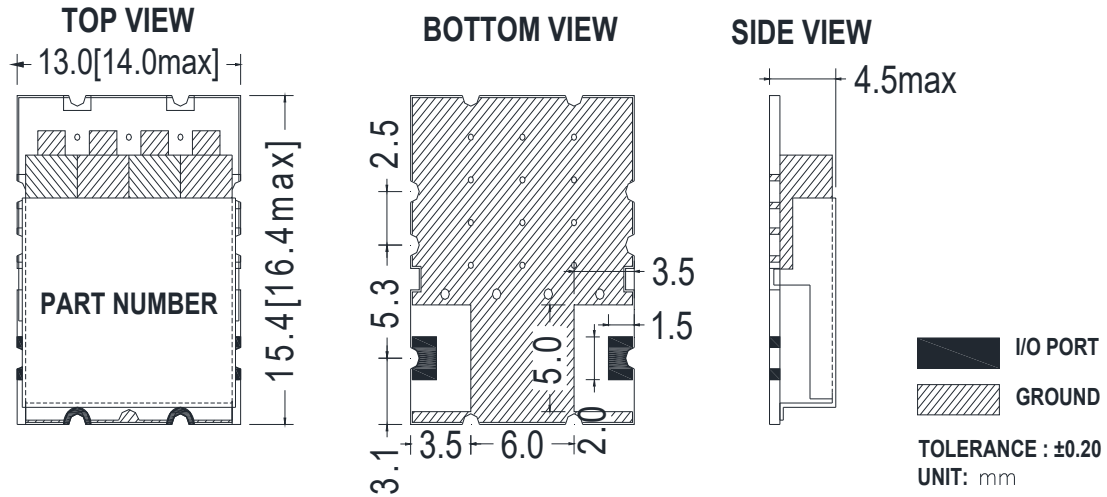

Parameter	Specification	Proposal
Dimension	10X10mm H=3mm	14 * 16.4 *4.5max