



Document	Document Number	Revision	Date
Spec Sheet	FTB525555A01	B	18-May-2020

LTCC FILTER

P/N : FTB525555A01

Contents

1. Electrical Specifications
2. Simulation Data
3. Mechanical Specification
4. Recommended Land Pattern


Revision	Description	Date
A	Initial Release	29-Apr-2020
B	Specification Changed	18-May-2020

Document	Document Number	Revision	Date
Spec Sheet	FTB525555A01	B	18-May-2020

1. Electrical Specifications

Parameter	Specification	Simulation	Proposal
Pass band Frequency	5250MHz ~ 5550MHz	-	OK
Insertion Loss	1.0dB max.	1.03	1.1dB max.
Return Loss	10.0 dB min.	14.0	OK
Attenuation	40dB min @ 700MHz ~ 2690MHz	46.0	OK
	30dB min @ 3545MHz ~ 3885MHz	37.49	OK
	20dB min @ 7335MHz ~ 11.65GHz	2.52	OK
Power Handling	Avg 1W, Peak 3W	-	OK
Impedance	50 Ω	-	OK
Operating Temperature Range	-40 - +85°C	-	OK


2. Simulation Data

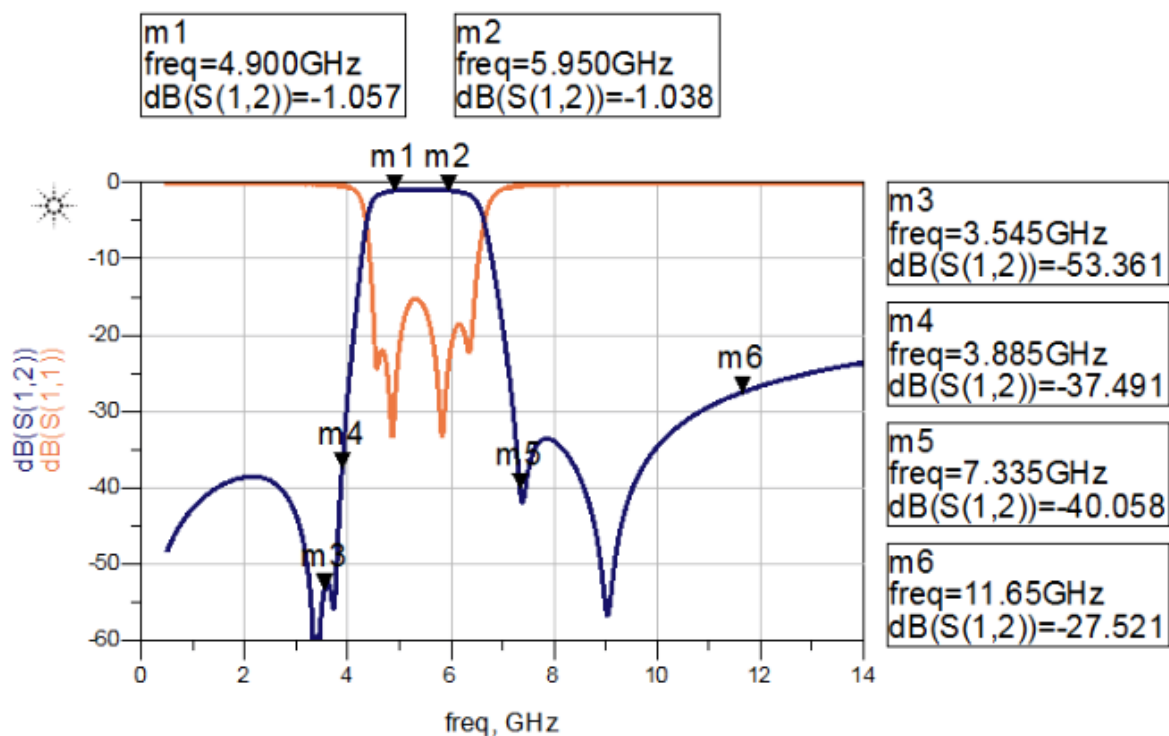

Document	Document Number	Revision	Date
Spec Sheet	FTB525555A01	B	18-May-2020

3. Mechanical Specification


*(a)IN PUT, (b) GND, (c) OUTPUT

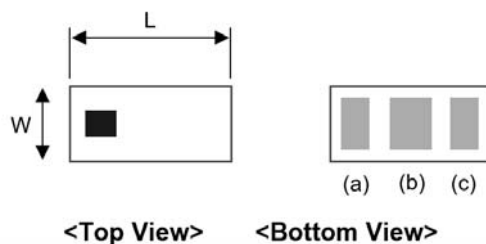

Parameter	Specification	Proposal
Dimension	1.60mm*0.80mm*0.6mm (L*W*H)	

4. Recommended Land Pattern

(Unit : mm)

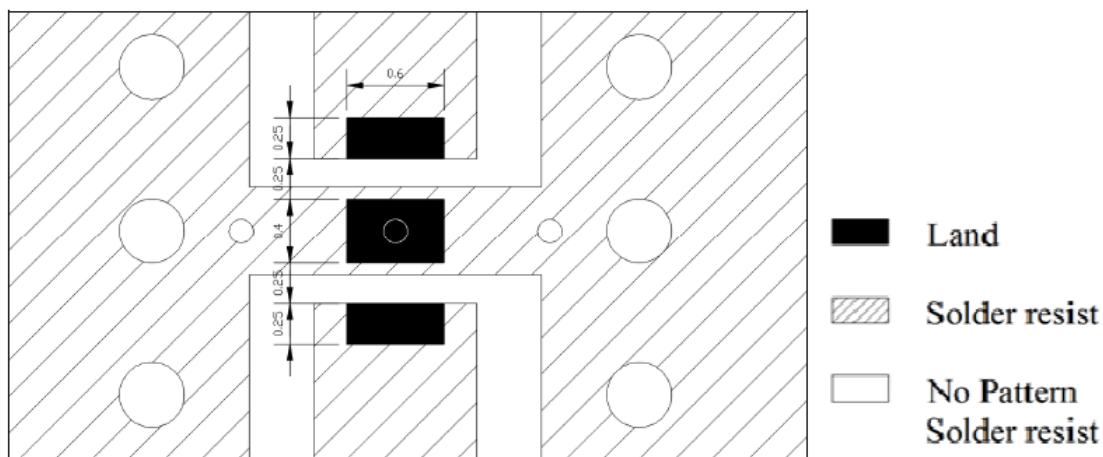

Line width to be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.